


CHARACTERISTICS


Ambient temperature	-10 ÷ +45 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	10 bar
Nominal bore (mm)	6
Nominal flow rate (NI/min)	860
Connector	G1/8
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot/Coil	AA series/U1-U3
Power consumption	3,5 W (DC), 5 VA (AC)
Connector	AM-5110
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC
Manual override	impulse screw – 2 positions

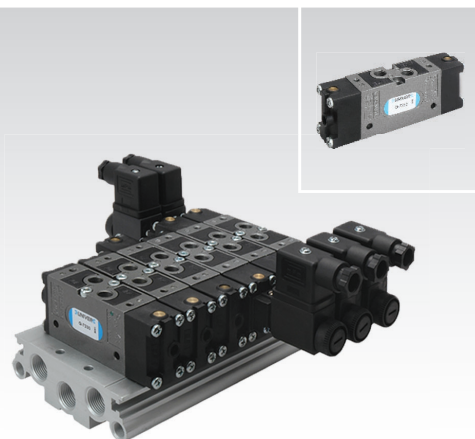

Available ATEX version upon request
CE Ex II 2Gc IIC T5 II 2Dc T100°C

Pneumatic impulse


Single impulse



G-7230

G-7231


Double impulse




G-7233



G-7333




G-7433



G-7533

Electrical impulse


Single impulse




G-7290

G-7291

Double impulse




G-7299



G-7399



G-7499



G-7599

The valve is supplied with two plugs to be fixed with sealants on unused connections 2-4
Solenoid valves are supplied without coil/connector/locking nut
See ATEX Catalogue for types and versions


Multiple sub-base G1/8



	Places
G-7900-02	2
G-7900-03	3
G-7900-04	4
G-7900-05	5
G-7900-06	6
G-7900-07	7

	Places
G-7900-08	8
G-7900-09	9
G-7900-10	10
G-7900-11	11
G-7900-12	12


Threaded connections 2 - 4 on both sides of the valve

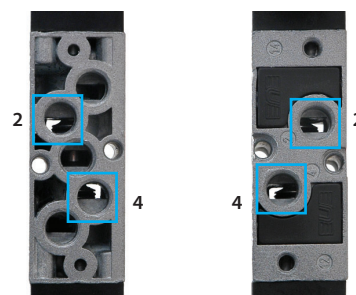


G-7885

AM-5151


AM-5152



Closing plate for sub-base place



Angle plate for "H" solenoid option



Angle plate for "P" solenoid option