


ASPIRODOR 165

ASPIRATORE CENTRIFUGO – CENTRIFUGAL FAN



MODELLO MODEL	A	B	C	D	Ø E	Ø F
ASPIRODOR 165 IN LINEA/IN LINE	205	205	263	148	Ø126	Ø102
ASPIRODOR 165 AD ANGOLO/ANGLE	205	205	242	148	Ø126	Ø102

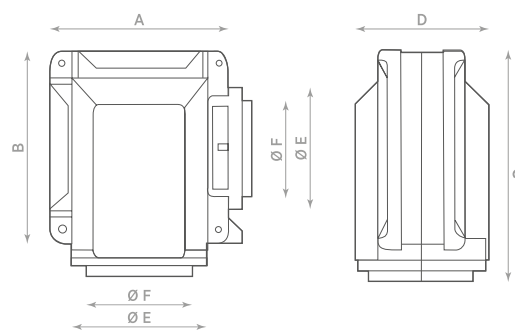

Aspiratore centrifugo, per estrarre aria o esalazioni dall'ambiente in cui è installato.


- Doppia applicazione, in linea o ad angolo, tramite una semplice e rapida operazione sul telaio del prodotto;
- Dotato di flangia per fissaggio a muro;
- Velocità dei modelli Base regolabile con RGE;
- In materiale ABS;
- Flangia d'imbocco adatta all'innesto di tubazioni sia di diametro 100 mm che di diametro 120 mm;
- Staffa di fissaggio con fori asolati per poter regolare la posizione del prodotto;
- Conformi alla Norma EN 60335-2-80;
- **POSIZIONAMENTO:** a parete, a condotto.

- Centrifugal fans to extract air through ducting;**
- Unique frame adjustment for in-line or angled mounting;
 - Double insulated product, without ground wire for fast connection;
 - Adjustable speed through RGE optional controller;
 - Made of white ABS material;
 - Horizontal or vertical mounting;
 - Suitable for false ceiling mounting;
 - Dual purpose spigots suitable for 100 mm or 120 mm ducts;
 - Fixing bracket for easy wall installation;
 - In accordance with Standard EN 60335-2-80;
 - **POSITIONING:** wall mounting, duct mounting.

DATI TECNICI – TECHNICAL DATA

MODELLO MODEL	CODICE CODE	Ø FORO Ø HOLE (mm)	TENSIONE VOLTAGE (Volt)	FREQUENZA FREQUENCY (Hz)	PORTATA FLOW RATE (m³/h)	PRESS. MAX MAX PRESS. (mm H ₂ O)	PRESS. MAX MAX PRESS. (Pa)	POTENZA POWER (W)	RUMOROSITÀ NOISE dB(A) _{1m}	PESO WEIGHT (Kg)
ASPIRODOR 165	0016500	100-120	220-240	50	165	18	177	60	51	1,8

GRAFICO DI PORTATA – FLOW CHART

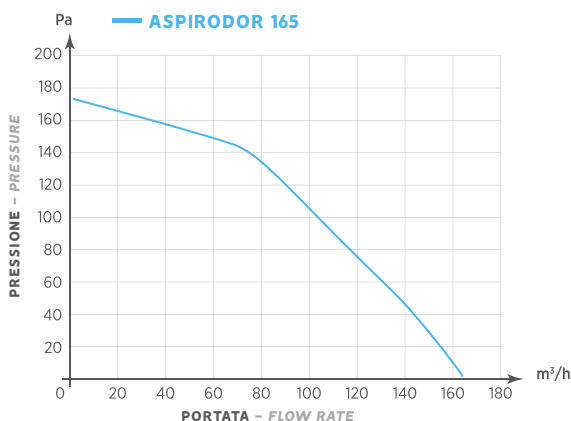

ACCESSORI (PAGINA 72) – ACCESSORIES (PAGE 72)



Griglia
Grille



Serranda
Shutter



Regolatori
Controllers