

Sound generator SOP

Comax
Signaltechnik


General information

Sound generator of latest technology. 32 different tones selectable. Attenuation of the sound pressure level by 10dB with switch. Automatic synchronisation. Low power consumption. Second stage possible.

The tones 3-7-8-14-29-30 (see tones table) are approved for fire alarm according to EN54-3. The sounder meets type specification A/B for indoor or outside use.

Technical data

Body	ABS
Colour	white or red
Cable entry	Shallow base hole Ø 10,5 mm Deep base for M20 cable gland (Option)
Volume control	Attenuation by 10dB (switch)
Tones	32 different tones selectable
Operation	continuous
Protection	IP54 (with deep base IP65)
Installation	free
Temperature	VDC: -25°C up to +70°C VAC: -10°C up to +55°C
Weight	approx. 250 g
Approval	EN54-3 (DC only)

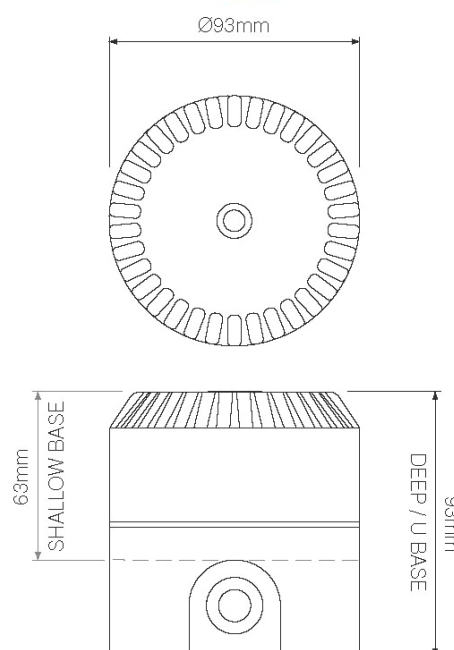

Order data

Item number	Nominal tension	Power output	Current consumption
SOP.024.2*	9-28 VDC	102dB(A)	40mA
SOP.230.7*	110-230VAC 50-60Hz	102dB(A)	35mA

Data of sound output and current consumption measured at 24VDC/230VAC

Options

B-SO.230.7*	Base 110-230VAC
A-SO.000.0*	Deep base, Knockouts being opposite
U-SO.000.0*	U-shape base, 2 Knockouts being on the same side

Colours 1 = red, 6 = white

Technical modifications without prior information



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Thalstrasse 279, CH-4712 Laupersdorf/Schweiz
Tel +41 32 617 31 41 E- mail@comax.ch Internet www.comax.ch

E_SOP_REV2_21_03_2014