
LEONI Protec item-no.: F08157-02-03

roundcable
3 x 35,0 mm²

No access may be allowed to either the original or to the copy of this document without our written consent in accordance with §15 and §17 of the (German) Copyright Act.
In the event of non-compliance we shall reserve the right to assert a claim for damages in accordance with §97 of the (German) Copyright Act as well as to demand prosecution within the meaning of §106 and §108a of the (German) copyright Act.

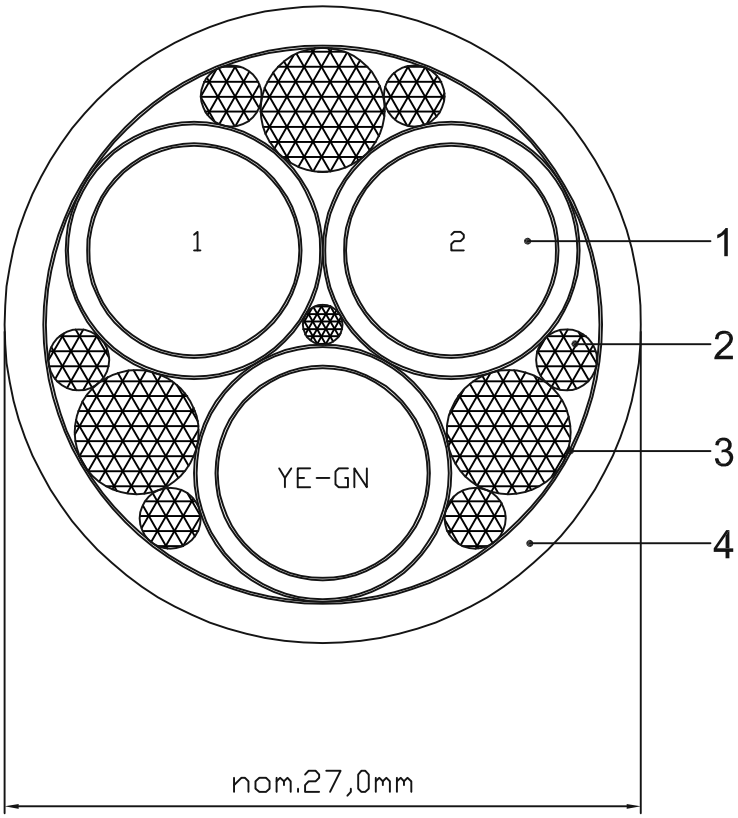

LEONI protec item.-Nr.: **F08157-02-03**

No access may be allowed to either the original or to the copy of this document without our written consent in accordance with §15 and §17 of the (German) Copyright Act. In the event of non-compliance we shall reserve the right to assert a claim for damages in accordance with §97 of the (German) Copyright Act as well as to demand prosecution within the meaning of §106 and §108a of the (German) copyright Act.

LEONI protec

pos. 1	3 insulated wires 35,0 mm²	
	conductor	(4508 x 0,1 mm) bare copper
	binder	polyester - non woven
	insulation	TPE
	colour	orange; printed with numbers 1 - 2, 1x yellow-green
	binder	PTFE
pos. 2	filler	
pos. 3	binder	PTFE
pos. 4	outer jacket	
	material	polyurethane, flame resistant,halogen free
	colour	black, matt
	printing	blue; www.leoni-robotic-solutions.com –S-3x35,0mm² F08157-02-03 prod. numb.

technical data:

operating voltage:	750 V
test voltage conductor/conductor:	4000 V/DC
operating temperature:	- 40°C to + 80°C
weight:	nom. 1,42 kg/m

bending radius:

fixed installation: 2 x diameter
minimum bending radius at a continuous flex of: 10 x diameter