




Conveyor system X65 - links and chains

Each link kit contains 10 links, 10 plastic pivots, and 10 stainless steel pins, unless otherwise specified.




Material abbreviations: See page III.

Plain chain, standard width

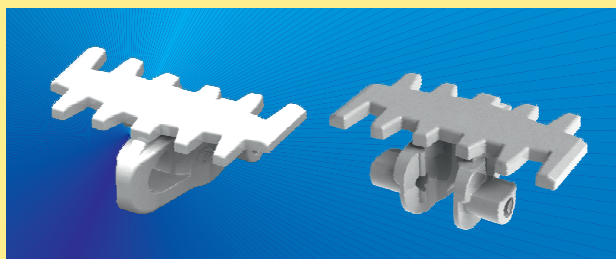

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTP 5A65	5115333	5117329		15 g	POM B	See page III
XLTP 5A65 C	5116892	5117371		15 g	POM D (See "Selecting the right chain material" page III)	See page III
XLTP 5A65 E	5116894	5117372		15 g	POM B COND	See page III
5116887	5116888	5117369		15 g	POM B BK	See page III
5116889	5116890	5117370		15 g	POM B Polished	See page III
5116872	5116873	5117362		15 g	PBT	See page III
5116876	5116877	5117364		15 g	POM B GY	See page III
5116878	5116879	5117365		15 g	POM B ISD GY	PA 66




Flocked chain

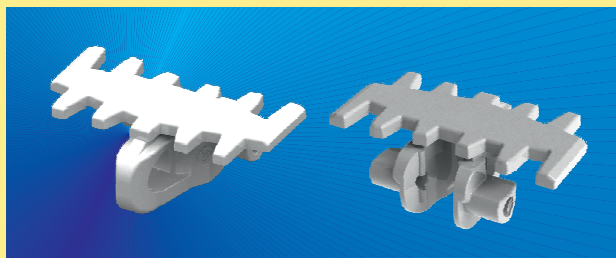




For lightweight products with scratch sensitive surfaces. Perfume boxes, cosmetic packages, DVD's, cigarette packages. Fibre material is PA66, glued to the link using epoxy glue.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5116884	n.a.	n.a.			POM B	See page III




Plain chain, width 51 mm

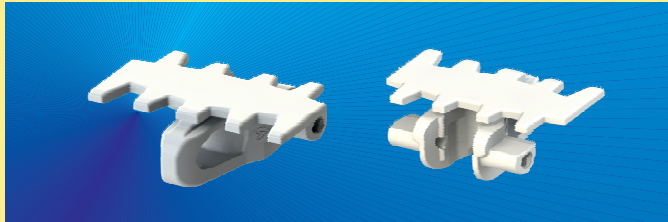							
Cigarette transport.							
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot	
5116880	5116881	5117366		12 g	PBT	See page III	



Flat top friction chain

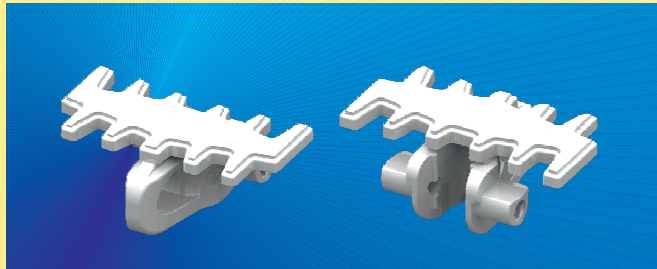						
Friction insert is polyether-polyamide. Slope <30°. Light goods: blister packs, small boxes, etc.						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTP 5A65 FA	5116794	5117357		15 g	POM B	See page III
XLTP 5A65 FAP	5116794	5117357		15 g	POM B	See page III

Steel top chain, fingered

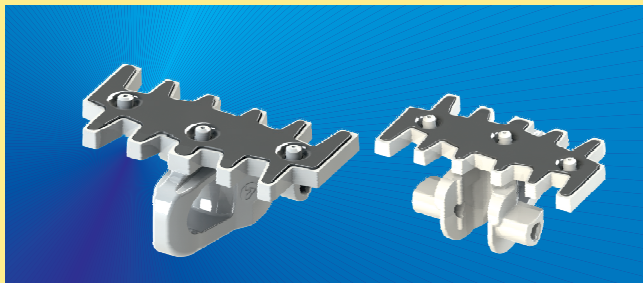						
Top surface is stainless steel. Cast-metal products. Accumulation.						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTP 5A65 TF	5116802	5117374		25 g	POM B + SS	See page III



Universal chain

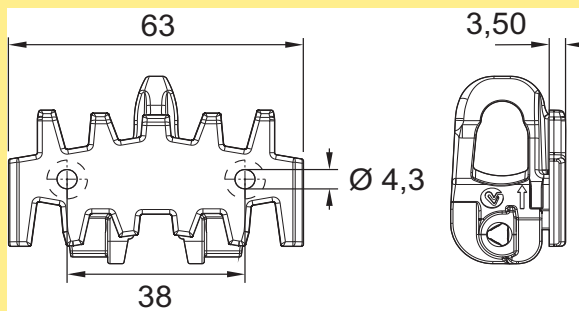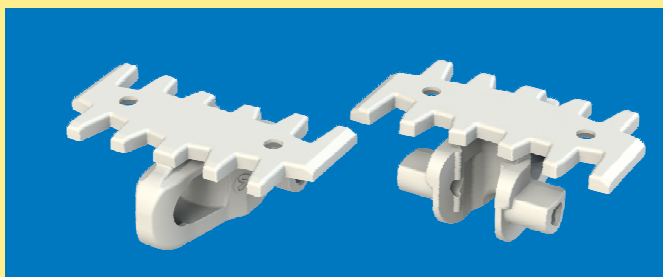

To attach customer specific cleat or fixture. The link has a hole for an M4 counter sink screw.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTF 5A65 U	XLTL A65 U	5119089		15 g	POM B	See page 4



Cleated chain

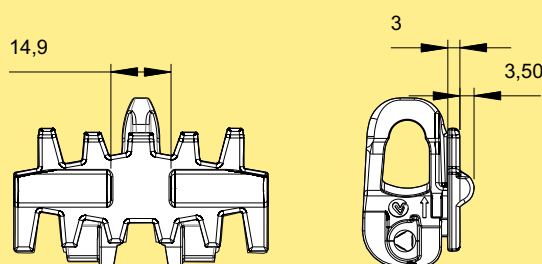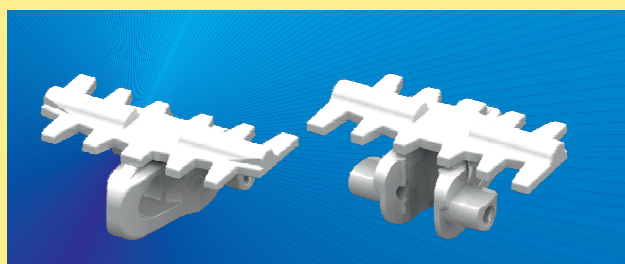

PBT version suitable for cigarette transport. Slope <10°.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5116751	5116750	5117334		15 g	POM B	See page III
5116739	5116746	5117512		16 g	PBT	See page III




Cleated chain, width 51 mm

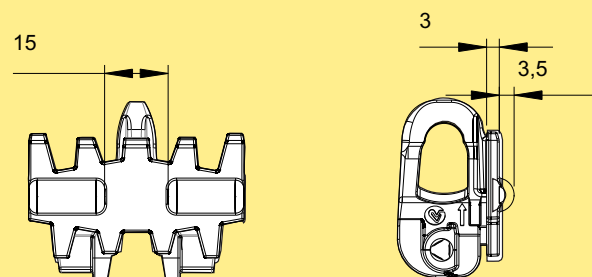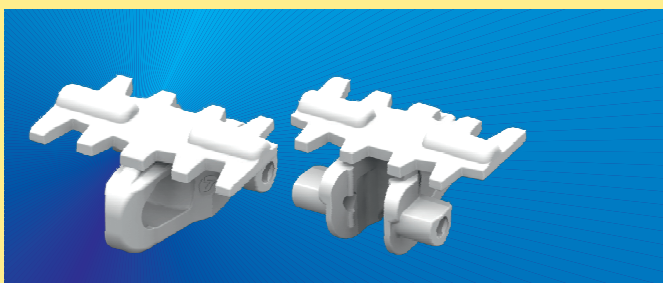

PBT version suitable for cigarette transport.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5116749	5116747	5117333		14 g	POM B	See page III
5116745	5116740	5117331		16 g	PBT	See page III




Cleated chain

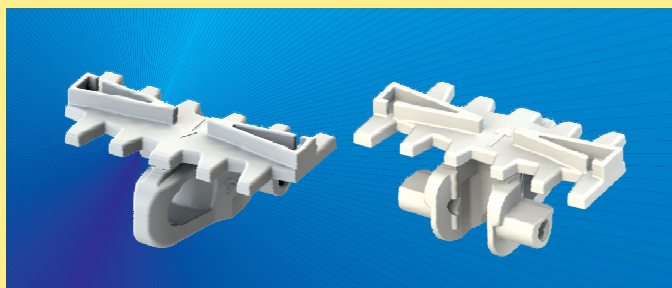

Short/low products. Center positioning.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTF 5A65X4 A	5116839	5117353	h=4 mm	16 g	POM B	See page III
XLTF 5A65X5,5 A	5116840	5117354	h=5.5 mm	16 g	POM B	See page III




Cleated chain V-block

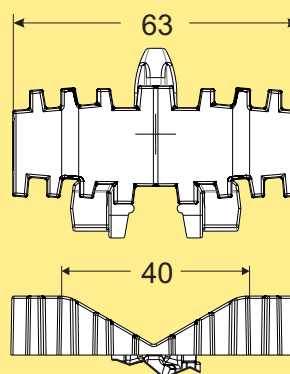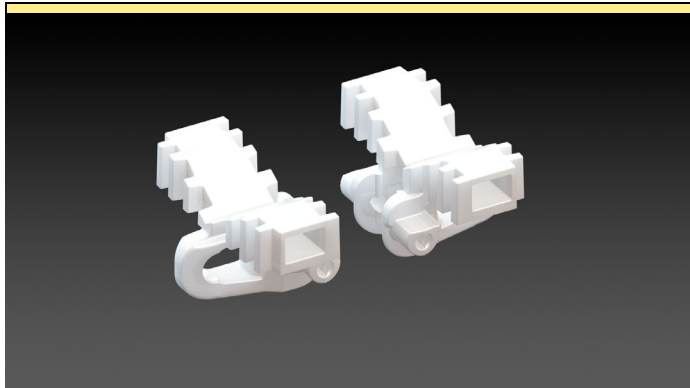

Slope 120°




Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5122583	5121162	5122573			POM B	See page III

Cleated chain V-block PAR

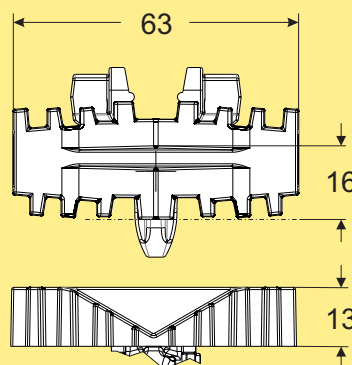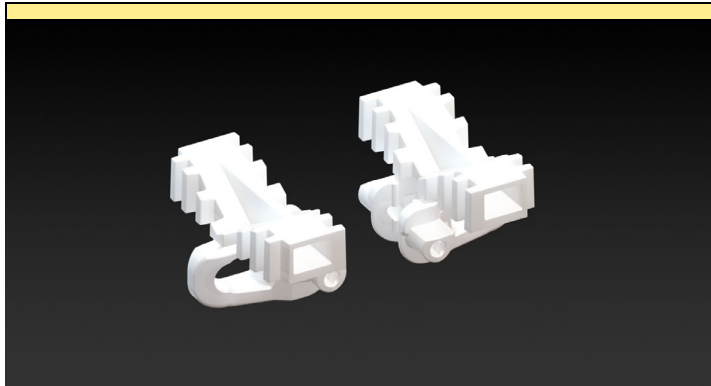

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5122584	5121163	5122582			POM B	See page III




Cleated chain

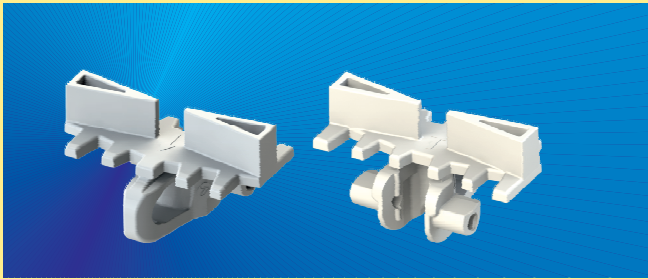

Center positioning.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTF 5A65X9 A	5116842	5117356	h=9 mm	17 g	POM B	See page III
XLTF 5A65X12 A	5116827	5117346	h=12 mm	18 g	POM B	See page III
XLTF 5A65X17 A	5116836	5117350	h=17 mm	19 g	POM B	See page III
XLTF 5A65X30 A	5116837	5117351	h=30 mm	24 g	POM B	See page III




Cleated chain

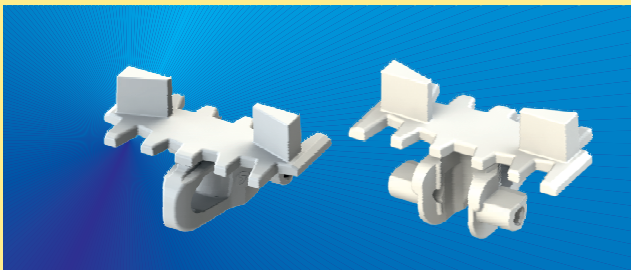

Center positioning.




Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTF 5A65X12 B	5116830	5117347		17 g	POM B	See page III

Cleated chain

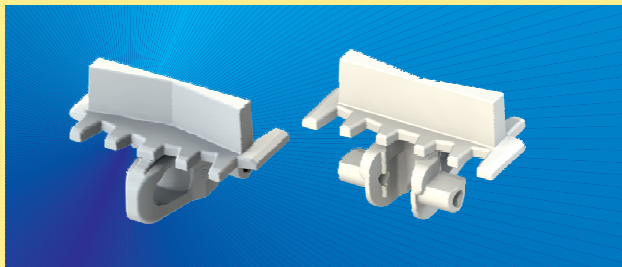

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTF 5A65X12 C	5116831	5117348	h=12 mm	18 g	POM B	See page III
XLTF 5A65X15 C	5116835	5117349	h=15 mm	19 g	POM B	See page III
XLTF 5A65X30 C	5116838	5117352	h=30 mm	30 g	POM B	See page III




Cleated chain

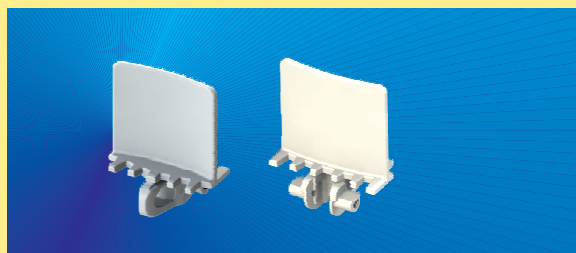

Requires modification of drive unit.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTF 5A65X55 D	5116841	5117355		30 g	POM B	See page III




Cleated chain

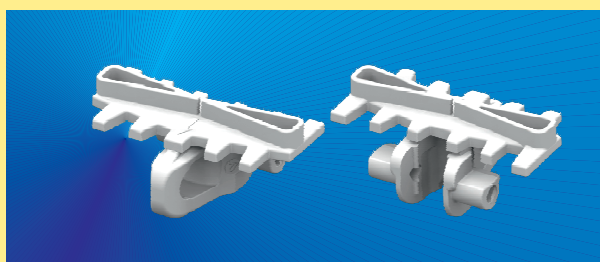

Round corners for in- and outfeed.



Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5995925	5116754	5117335	h=5,5 mm	16 g	POM B	See page III
5995928	5116814	5117336	h=9 mm	17 g	POM B	See page III
5995930	5116817	5117337	h=12 mm	18 g	POM B	See page III

Cleated chain


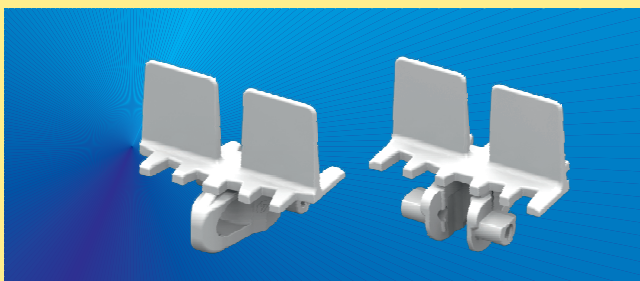


Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5995924	5116738	5117330		20 g	POM B	See page III



Cleated chain

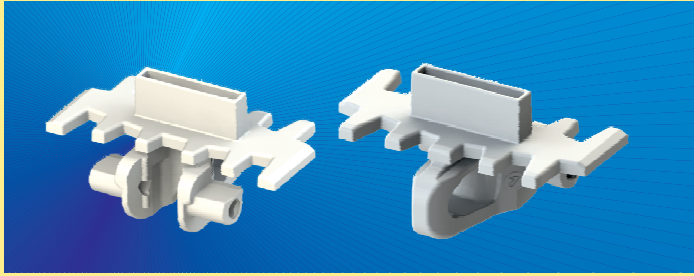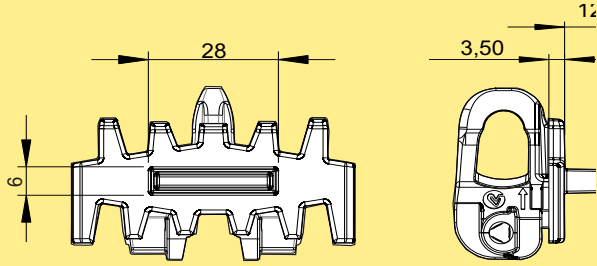						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5995931	5116818	5117338		16 g	POM B	See page III

Cleated chain

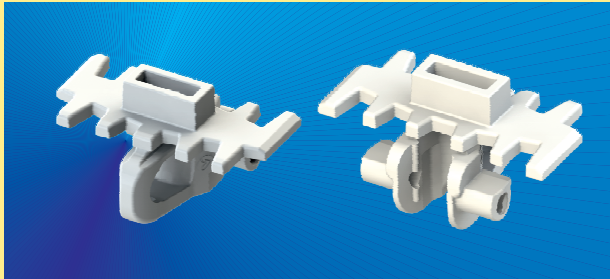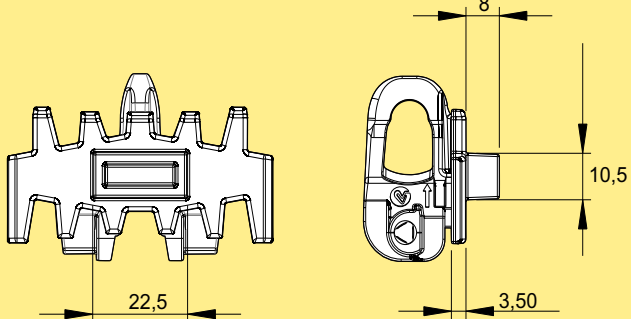						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5995937	5116825	5117344			POM B	See page III

Cleated chain

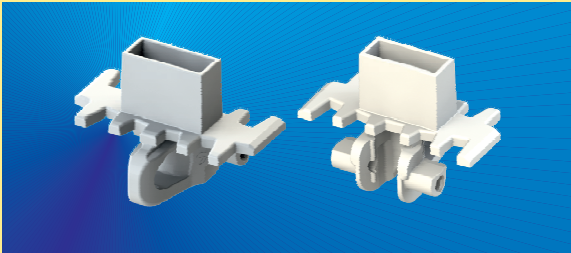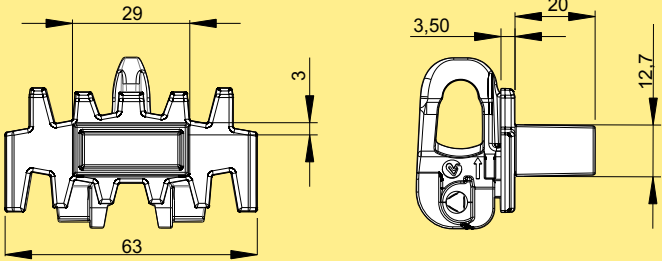						
Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5995934	5116823	5117342		18 g	POM B	See page III

Cleated chain

Vertical transport. Rectangular products sensitive to point loads.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
5995933	5116821	5117340	h=15 mm	18 g	POM B	See page III
5995936	5116824	5117343	h=30 mm	21 g	POM B	See page III

Friction top chain

Friction insert: polyether -polyamide


Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTP 5A65 F	5116844	5117360			POM B	See page III
XLTP 5A65 FP	5116844	5117360			POM B	See page III

Flexible cleat chain

Max. product weight for XLTE 5A65 B: 0,1 kg. Flexible insert: polyether-polyamide. Wedge transport. Bags, bottles and cans. Horizontal transport of light products e.g. paper bags.

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTE 5A65 B	5117175	5117378		17 g	POM B	See page III


X65 **XL** **XS** **X45H** **X45** **Introduction**



Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTE 5A65 C	5116798	5117358		31 g	POM B	See page III
		5056558				

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTE 5A65 C	5116798	5117358		31 g	POM B	See page III
		5056558				


NK	XTC	XT	X300	X180	XK	XH	X85X	X85	X70X	XM
----	-----	----	------	------	----	----	------	-----	------	----



Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTE 5A65 D	5116797	5117359		41 g	POM B	See page III
		5058089				

Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTE 5A65 D	5116797	5117359		41 g	POM B	See page III
		5058089				

DX	WL678X	WL526X	WL374X	WL273X	WL222X	WL
----	--------	--------	--------	--------	--------	----



Chain	Link(s)	Link kit(s)	Dimensions	Link weight	Material, link	Material, pivot
XLTR 5A65	5116900	5117373		25 g	POM B	See page III
XLTR 5A65 P	5116900	5117373		25 g	POM B	See page III

(3902819 Roller, order in multiples of 200 Pcs)

