



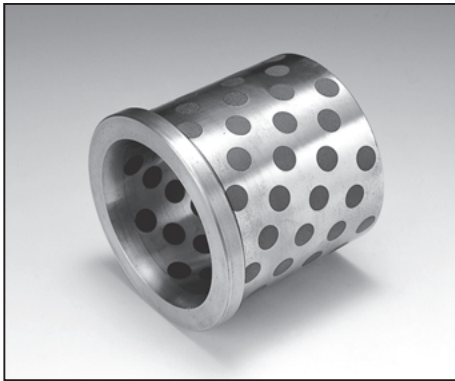

- Applicable to rotation, oscillation, and reciprocating motion.
- It is recommended to use a set screw to prevent dislocation.

Specify Part No. by required I.D., O.D. and Length.
(e.g.) I.D. is 65mm, O.D. is 80mm, and length is 80mm.

SGF - 658080
Part No.

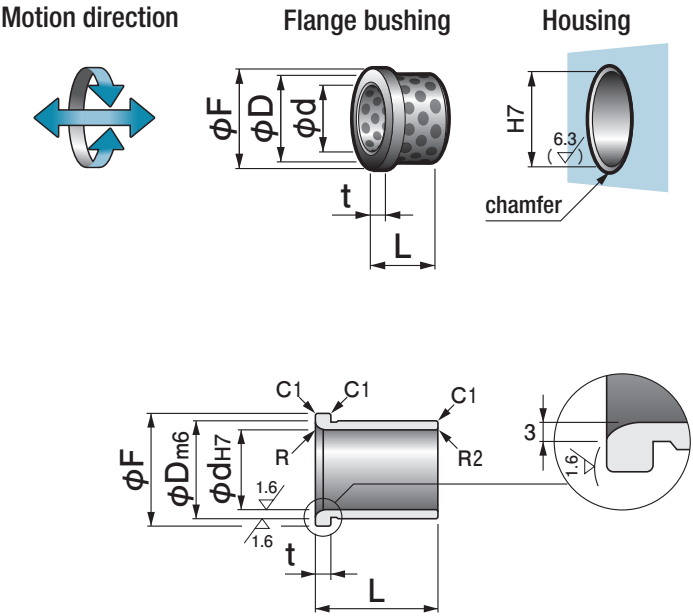

Part No.	I.D.		O.D.		Flange		Length		R
	φd	Tolerance	φD	Tolerance	φF	t	L	Tolerance	
SGF-253540	25	+0.021 0	35	+0.025 +0.009	45	7	40	0 -0.3	10
SGF-304050	30	+0.021 0	40	+0.025 +0.009	50	10	50	0 -0.3	20
SGF-405570	40	+0.025 0	55	+0.030 +0.011	65	10	70	0 -0.3	20
SGF-506580	50	+0.025 0	65	+0.030 +0.011	75	10	80	0 -0.3	20
SGF-607580	60	+0.030 0	75	+0.030 +0.011	85	10	80	0 -0.3	20
SGF-658080	65	+0.030 0	80	+0.030 +0.011	90	10	80	0 -0.3	20
SGF-6580120	65	+0.030 0	80	+0.030 +0.011	90	10	120	0 -0.3	20
SGF-80100100	80	+0.030 0	100	+0.035 +0.013	110	10	100	0 -0.3	20
SGF-80100140	80	+0.030 0	100	+0.035 +0.013	110	10	140	0 -0.3	20
SGF-100120100	100	+0.035 0	120	+0.035 +0.013	130	10	100	0 -0.3	20
SGF-100120140	100	+0.035 0	120	+0.035 +0.013	130	10	140	0 -0.3	20

▲ The dimensional tolerances are the values measured at +25°C.