



250
15

90
11

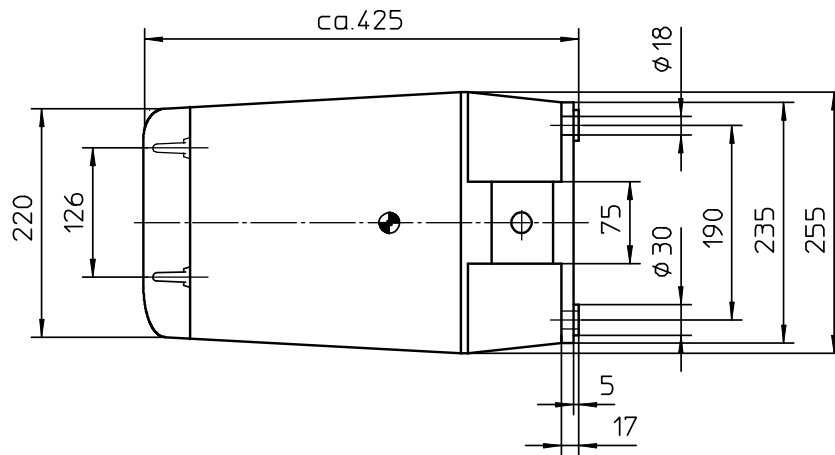

Gn,min 70 kg
Gn,max 250 kg

Drawing-no. of the characteristic
curve data sheet: VIB 11-746
Drawing-no. of the spare part list: VIB 06-368

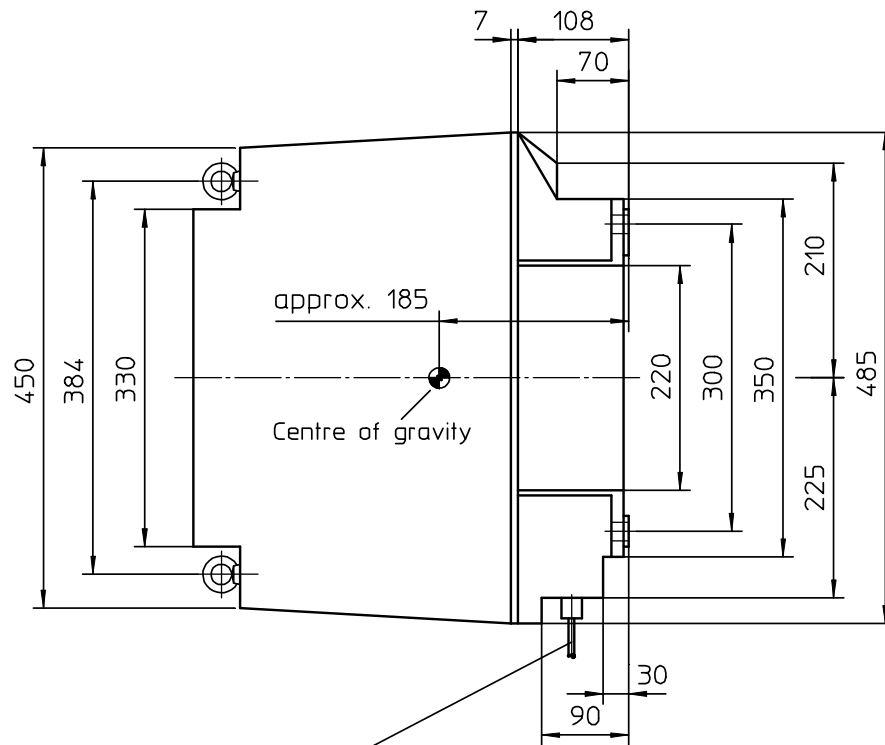

Rubber-sheathed cable
H05RR-F3G 1,5x3200 lg.

Degree of protection: IP55

Mounting elements for	
Taphole	Trough hole
4 x Hexagon screw M16xL ISO 4017 8.8-A2G	4 x Hexagon screw M16xL ISO 4017 8.8-A2G
4 x Spring washer A16 DIN 128 FSt-A2G	8 x Hexagon nut M16 ISO 4032 8-A2G
Maximum length of screw: 50 mm ①	

Weight of the vibrator 98 kg

observe pro- tection mark acc. to DIN 34		weldment acc. to EN ISO 13920-BF		scale 1:5	
ISO 128		date 25.04.02		name Belfuss	
drawn		check		name	
norm		A3 - ME10		Magnetic Vibrator	
1		New screw length		drawing no: 04_625_EN	
modification		date 22.09.05		version: 1	
name		Belfuss		sheet 1	
orig		subst. f.		of 1 sh	
subst. by		subst. by			

AVITEQ
Vibrationstechnik