


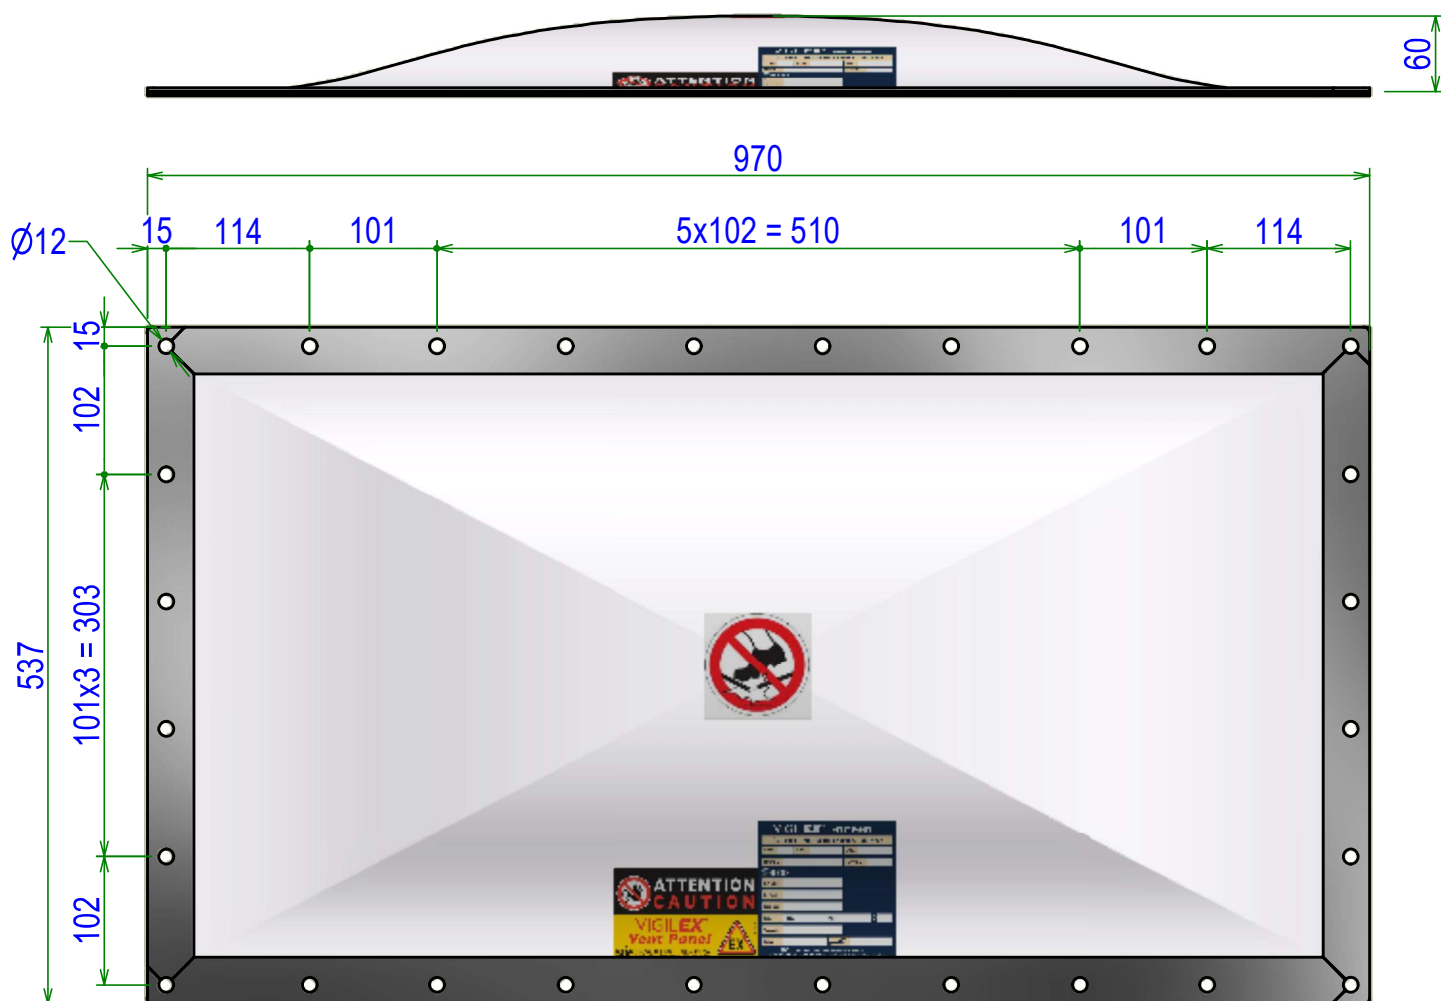

ATEX II GD - INERIS15ATEX0001X

Pstat : < 500 mbar

Pstat standard : 100 mbar +/-15% @22°C

Max vacuum : 200 mbar pour / for Pstat 100 mbar

Surface / Area: 4040 cm²

Kst : dp/dt < 500 bar/s

Kg : dp/dt < 130 bar/s


Pmax < 12 bar / Pred. max < 1.8 bar

- Inox 304L / stainless steel 1.4307


- Inox 316L / stainless steel 1.4404

- Joint / gasket EPDM Temp: -40...+80° C

- Joint / gasket SILICONE FDA Temp: -60...+200° C

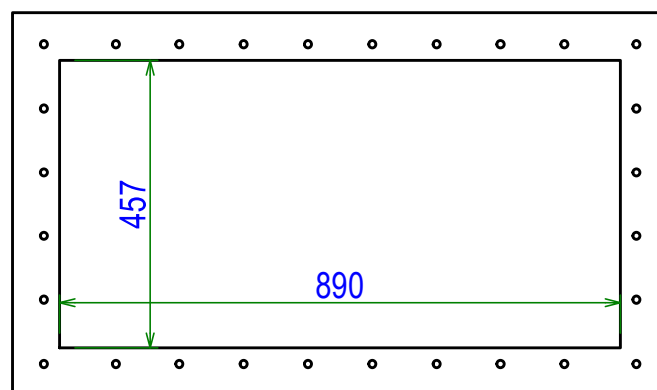

Poids net / Unit weight : 7,643 kg

A	Création	11/07/2022	AV	MJ			
Ind.	Objet de la modification		Date	Nom	Vérif.		
		Matière:	Date de création: 10/12/2012		A4	Ech.: s/e	
Plan n°: 57VD_046089_Clt							
Désignation:							
VIGILEX VD 457x890							