


TECNA®

INVERTER TRANSFORMERS

ISO 5826
33 ÷ 664 kVA

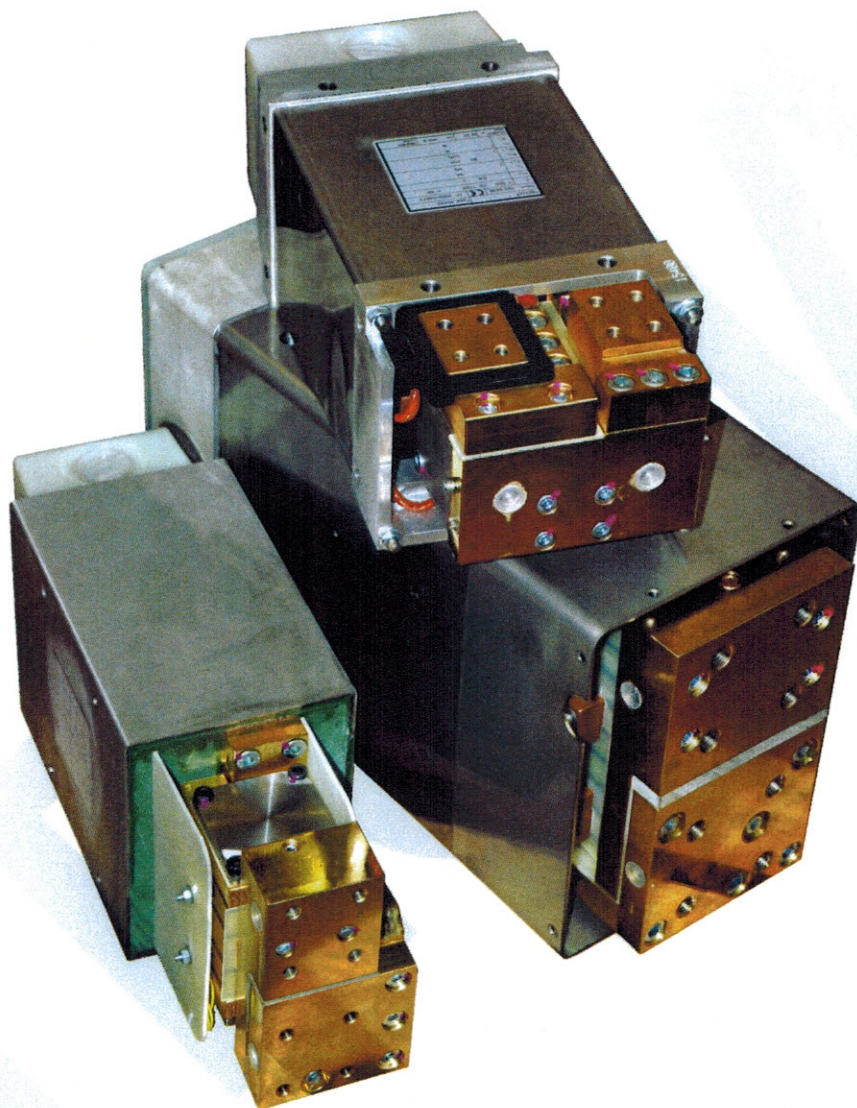

ITEM	kVA 20%	kVA 50%	U./Freq Volt/Hz	V _{2d} Volt				I ₂ 100% kA	Vcc %	H ₂ O l/min	COLOR	kg	ISO
				1	2	3	4						
41930	1050	664	500/1000	12,7	-	-	-	35,6	-	24	INOX	250	-
40266	379	240	500/1000	10,9	-	-	-	14,9	-	15	INOX	85	-
40314	316	200	500/1000	10,4	-	-	-	13,0	-	12	INOX	63	-
37610	253	160	500/1000	12,3	-	-	-	8,8	-	8	INOX	32	-
40139	142	90	500/1000	9,9	-	-	-	6,1	-	6	INOX	27	-
40138	88	56	500/1000	8,4	-	-	-	4,4	-	6	INOX	20	-
43737	80	51	500/1000	6,1	-	-	-	5,4	-	4	INOX	12	-
40365	52	33	500/1000	4,8	-	-	-	4,4	-	4	INOX	13	-
40000	142	90	500/1000	9,9	-	-	-	6,1	-	6	INOX	27	-