

product is designed and validated according to EN 12532 / EN 12533

Creo 8.0

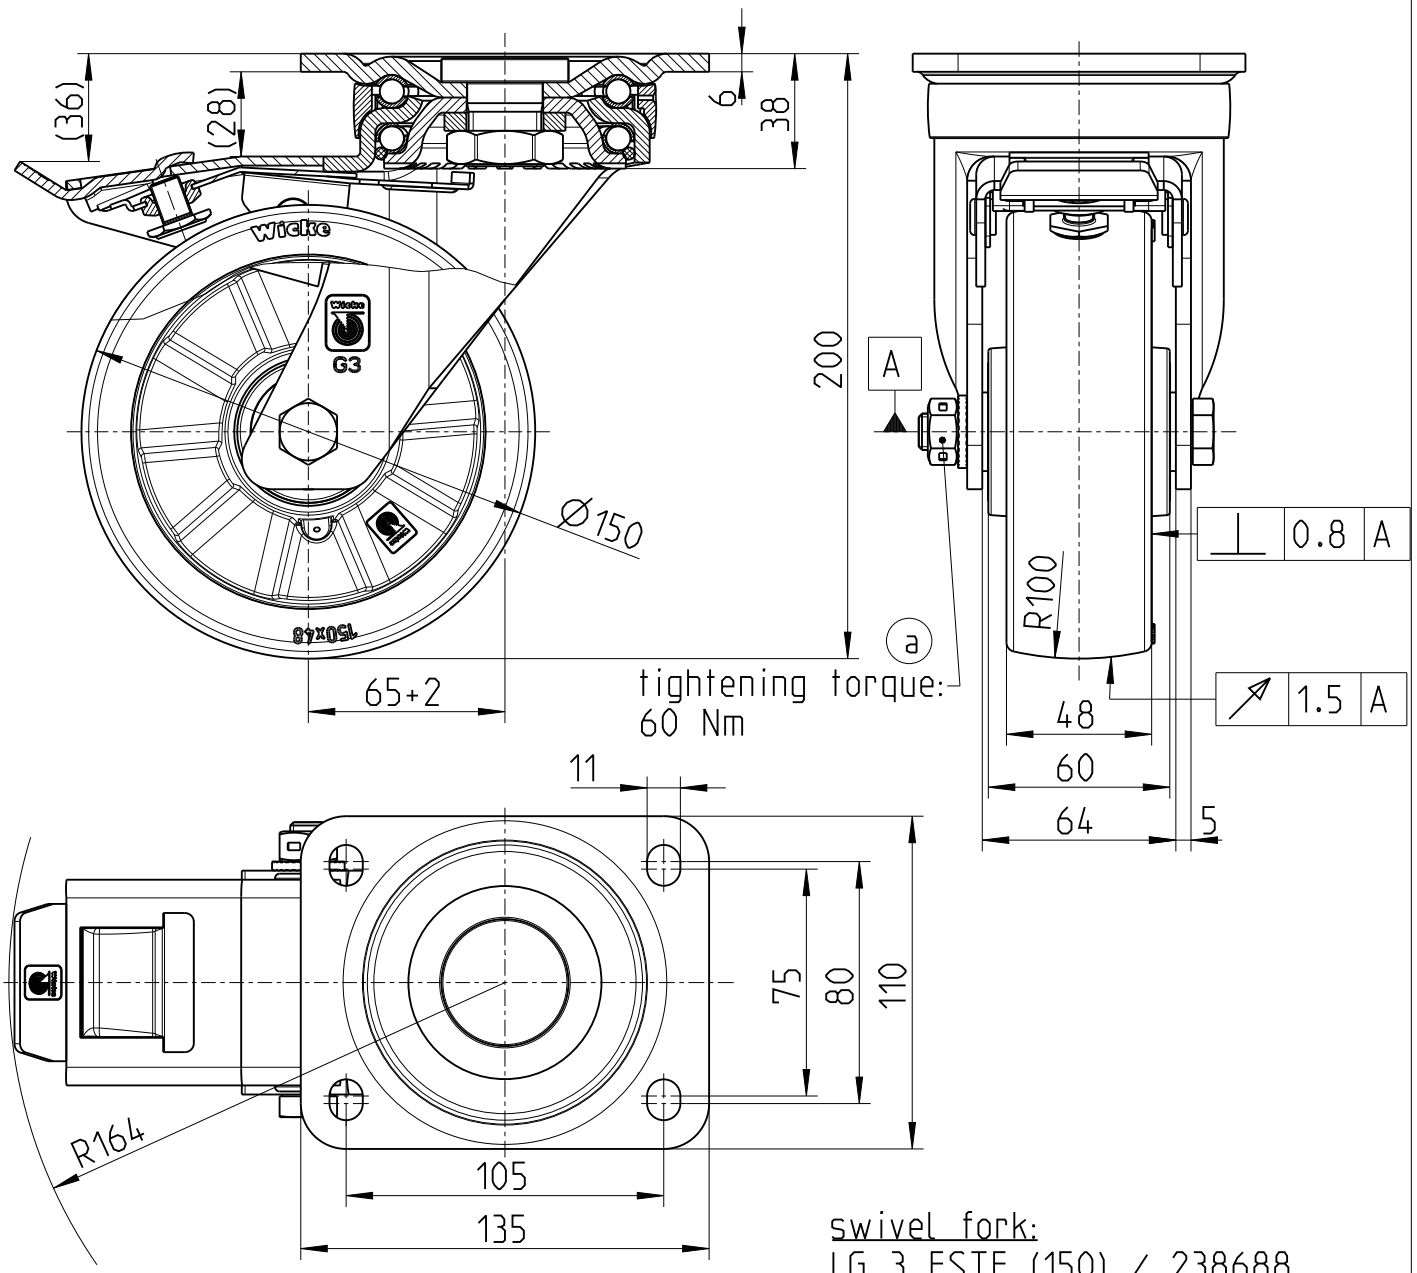

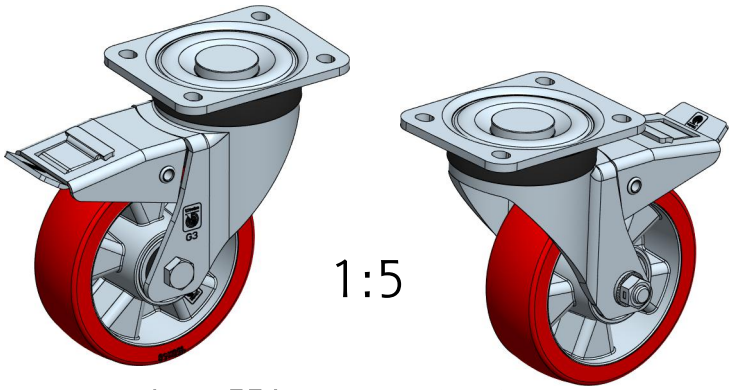

load capacity: 550 kg up to 6 km/h

swivel fork:
LG 3 FSTF (150) / 238688
zinc plated

wheel:
TE 150/50/4KX-S / 256764
tyre: Redthane® 75 Shore A
rim: GD-AlSi9Cu3
ball bearing: 6204-2RS INOX

axle: (a)
A 63/4K-12x90 / 212929

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rigths reserved in the event of the grant of a patent, utility model or design.

accept. tolerances
EN 12533
EN ISO 8015
EN ISO 1101

surface

scale 2:5

weight 3.925 kg

material

	date	signatures
drawn by	19.12.22	Marek
checked	19.12.22	Hoffmann
standard		
change checked	13.06.25	

title
swivel castor
TE LG 3/150/50KX-FSTF-S

Unit: D ☒ C ☒

drawing number
256765

sheet 2/2
A4

rev.	description	date	sign.
a	100055 to 212929 tightening torque added	13.06.25	Marek

repl.for:

replaced by:

Wicke Germany

Notice of protected right ISO 16016

PDF-File vom 13.06.2025 / Maria Marek

Version: A.1