
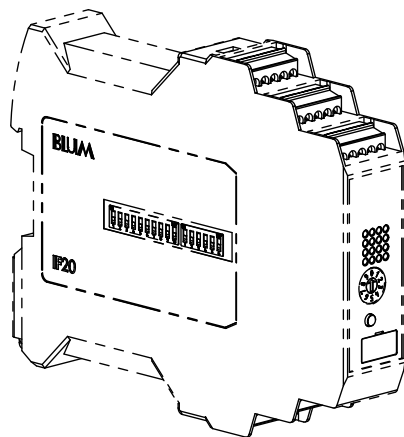

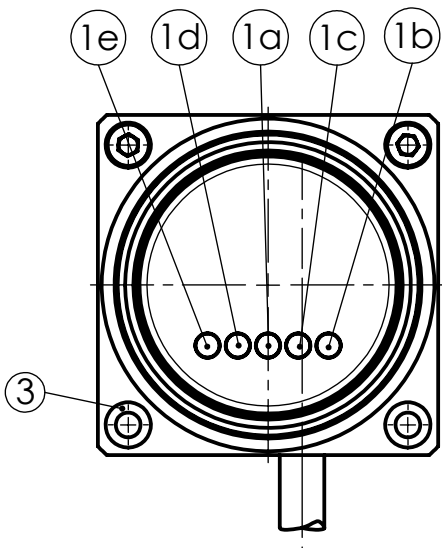
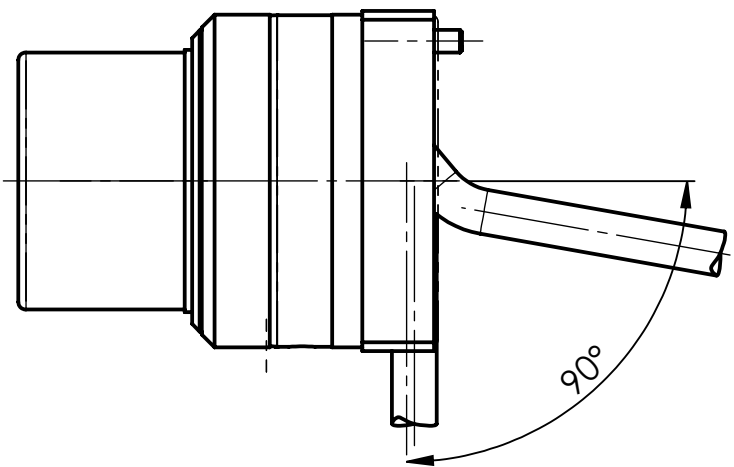
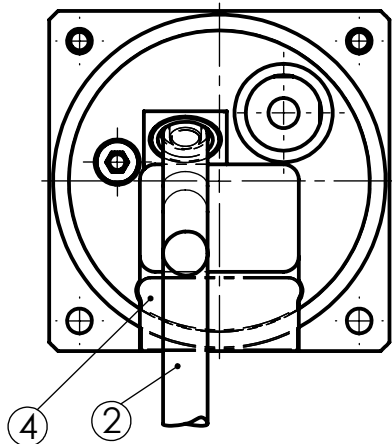


RC66 Generation 2

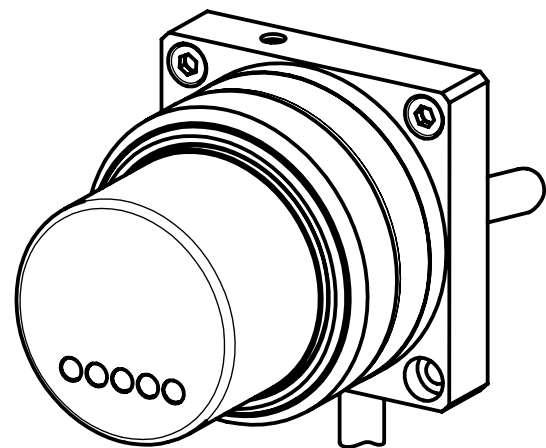

Interface IF59-A2 oder / or Interface IF20
142821 184560

- 1a

LED Mode

/ LED mode
- 1b

LED Batterie

/ LED battery
- 1c

LED Status

/ LED status
- 1d

LED Empfang

/ LED receive
- 1e

LED Senden

/ LED transmit
- 2

Kabel

/ cable
- 3

für Befestigungsschraube

/ for mounting screw
- 4

Dichteinsatz + O-Ring (bei waagrechtem Kabelabgang)

/ seal insert + o-ring (at horizontal cable outgoing)

Bestell-Nr.: order-No.:	Kabellänge cable length	Gewicht mit Kabel weight with cable
230374	10 m	0,6 kg
255804	20 m	1,1 kg
257420	10 m + Kupplungsstecker / coupling plug	0,7 kg
257422	20 m + Kupplungsstecker / coupling plug	1,2 kg

Betriebsspannung U_B /operating voltage U_B : 12V über IF59 / 12V by IF59
13V über IF20 / 13V by IF20

Schutzart/ protection class: IP68

Frequenzband/ frequency band: 2,4000 - 2,4835 GHz

Sendeleistung/ transmission power: -5 dBm bis/to +0 dBm

