

Datasheet



Quote Q25.0263141
Cust Combimac B.V.

Ref 339684



Mors 1-5, 7151 MX Eibergen NL
www.rotor.nl tel.: +31 545 464640
sales@rotor.nl tel.: +31 545 464646

Model No. 2-Pole cage motor 5RN 71M 0,55kW D230V 50Hz IM3641-FT85 5RN71M02E23U24B config 3641-A

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
230	D	50	0,55	0,737	2,35	2870	1,8	IE2	75,9	76,8	75,2	0,80	0,72	0,59	4,60	2,60	2,60
400	Y				1,34												
265	D	60	0,63	0,845	2,3	3380	1,8	IE2	74,0	74,4	71,8	0,80	0,73	0,60	5,10	2,80	2,80
460	Y				1,33												

Motor type	5RN71M02E23
Enclosure	Totally Enclosed Fan Cooling
Frame Material	@Aluminium (cas
Frame size	71M
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	0,55 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	51 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM3641-FT85
Cooling method	IC411
Motor weight - approx.	07 kg
Gross weight - approx.	07 kg
Motor inertia	0,0005 kgm ²
Vibration level	according IEC60034-14
Direction of rotation	cw /ccw

Rotor type	Cage motor
Bearing type	6202-2Z/C3WT - 6202-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	12,7000 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	260%	459%		260%	0,8 A
@ D 265V 60Hz	280%	508%		280%	0,73 A

NOTE


All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

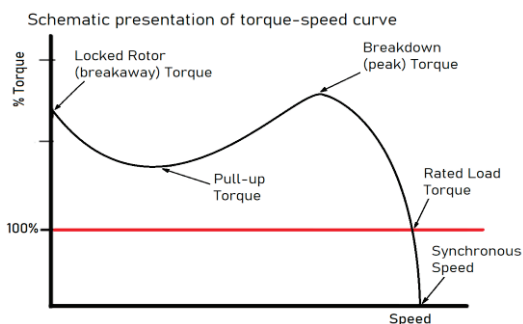

P000047222
P000047223



This is an uncontrolled copy, data can be changed anytime.

Driving efficiency and sustainability

