

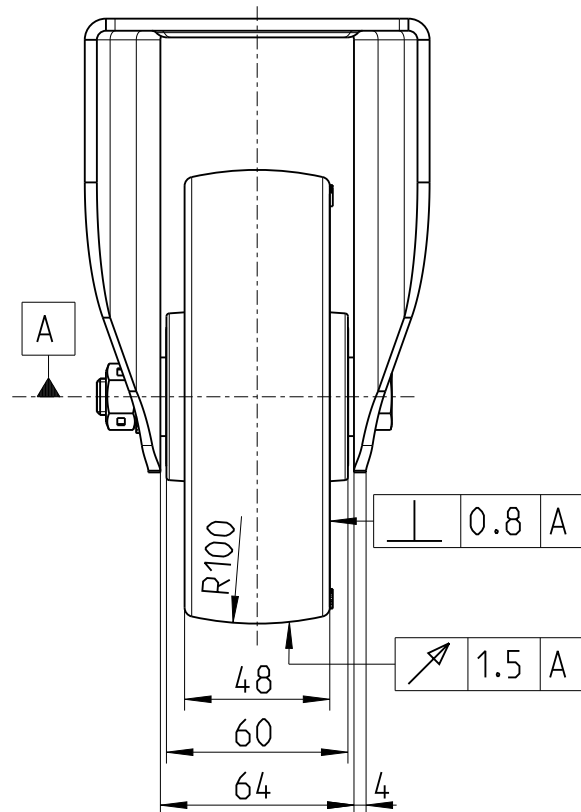
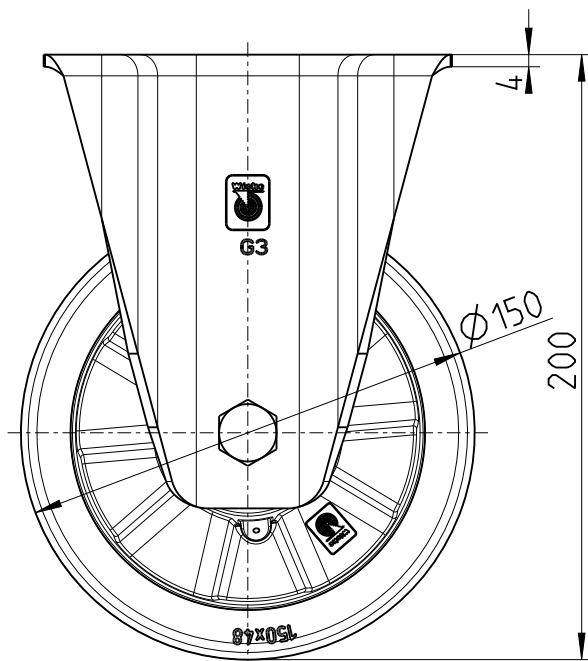


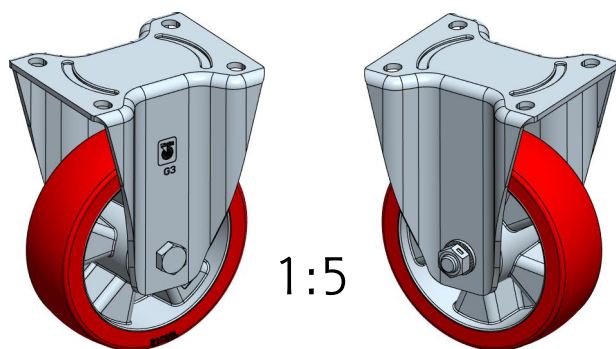

tightening torque:
60 Nm

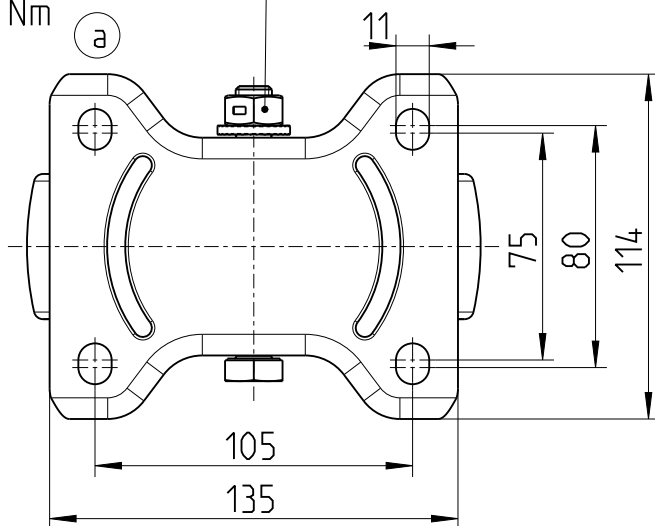

fixed fork:
BG 3 / 124784
zinc-plated

wheel:
TE 150/50/4KX-S / 256764
tyre: Redthane® 75 Shore A
rim: GD-ALSi9Cu3
ball bearing: 6204-2RS INOX

axle: ^(a)
A 63/4K-12x90 / 212929

load capacity: 550 kg up to 6 km/h

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

accept. tolerances
EN 12533
EN ISO 8015
EN ISO 1101

surface

scale 2:5

weight 2.491 kg

material

rev.	description	date	sign.
a	100055 to 212929 tightening torque added	13.06.25	Marek

date	signatures
drawn by 19.12.22	Marek
checked 19.12.22	Hoffmann
standard	
change checked 13.06.25	Bgt

title	Unit:
fixed castor	D ☒
TE BG 3/150/50KX-S	C ☒
drawing number	sheet
256769	2/2
repl.for:	replaced by:

