

## Item description/product images



### Description

**Material:**

Electro zinc-plated steel or stainless steel.

**Note:**

Ball transfer units with steel housing have a felt seal to protect against dirt.



**Drawing reference:**

- 1) load ball
- 2) bearing balls


Form B: cap and housing electro zinc-plated, balls steel

Form C: cap and housing electro zinc-plated, balls stainless steel

Form D: cap, housing and balls stainless steel

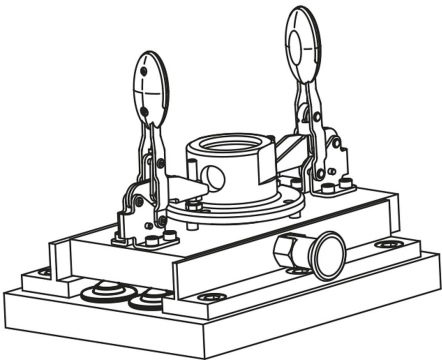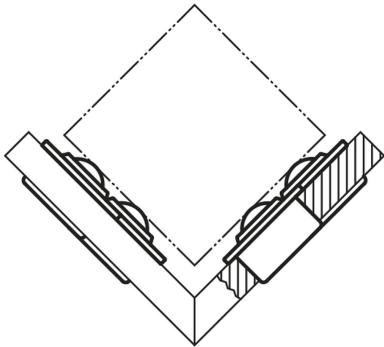

## Drawings

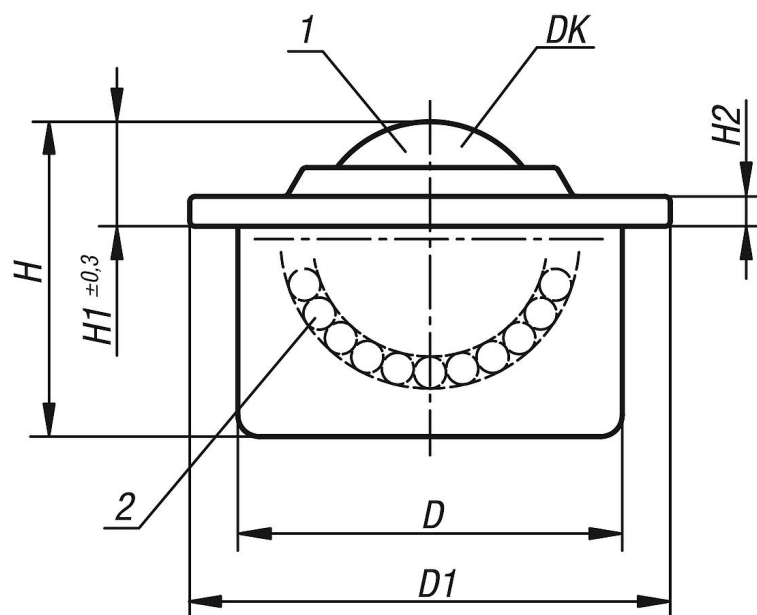

## Overview of items

| Order No. | Form | DK   | D        | D1 | H    | H1   | H2  | Load rating C (N) | Suitable tolerance ring |
|-----------|------|------|----------|----|------|------|-----|-------------------|-------------------------|
| 95150-115 | B    | 15,8 | 24±0,065 | 31 | 21   | 9,5  | 2,8 | 600               | 95164-024               |
| 95150-122 | B    | 22,2 | 36±0,080 | 45 | 30   | 9,8  | 2,8 | 1600              | 95164-036               |
| 95150-130 | B    | 30   | 45±0,080 | 55 | 37   | 13,8 | 4   | 3000              | 95164-045               |
| 95150-145 | B    | 44,5 | 62±0,095 | 75 | 53,5 | 19   | 4   | 6100              | 95164-062               |
| 95150-215 | C    | 15,8 | 24±0,065 | 31 | 21   | 9,5  | 2,8 | 600               | 95164-024               |
| 95150-222 | C    | 22,2 | 36±0,080 | 45 | 30   | 9,8  | 2,8 | 1600              | 95164-036               |
| 95150-230 | C    | 30   | 45±0,080 | 55 | 37   | 13,8 | 4   | 3000              | 95164-045               |
| 95150-245 | C    | 44,5 | 62±0,095 | 75 | 53,5 | 19   | 4   | 6100              | 95164-062               |
| 95150-315 | D    | 15,8 | 24±0,065 | 31 | 21   | 9,5  | 2,8 | 380               | 95164-024               |
| 95150-322 | D    | 22,2 | 36±0,080 | 45 | 30   | 9,8  | 2,8 | 1000              | 95164-036               |
| 95150-330 | D    | 30   | 45±0,080 | 55 | 37   | 13,8 | 4   | 2000              | 95164-045               |