


TECHNICAL CHARACTERISTICS

Pump model: MAG-PR 4 SXN_GBNF6





- 400 l/h at 1400 rpm
- Magnetic drive pump
- Standard bypass
- AISI 303 stainless steel pump body
- NBR gasket
- 3/8 GAS cylindrical thread
- Setting 6 bar

Certificazione : DM174

Graph: flow rate / pressure

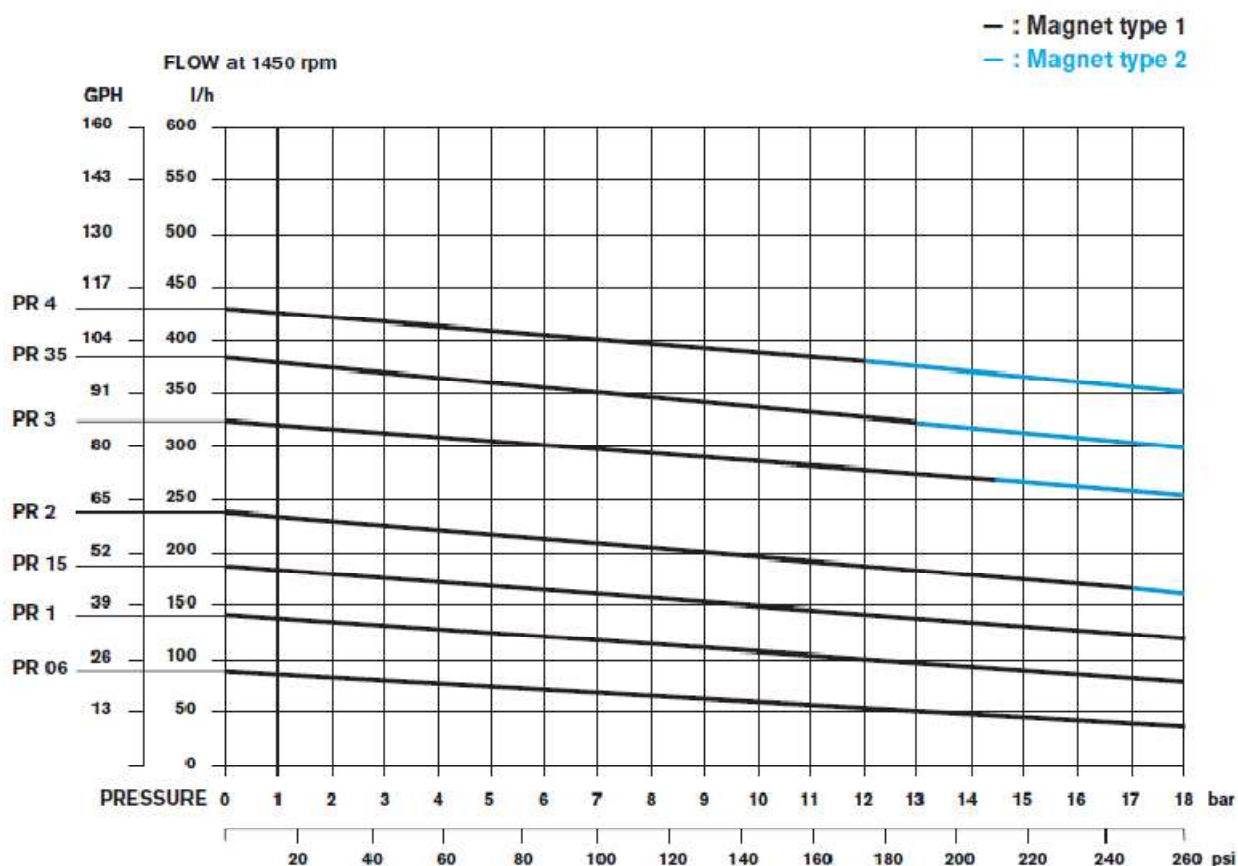

Dimensions :

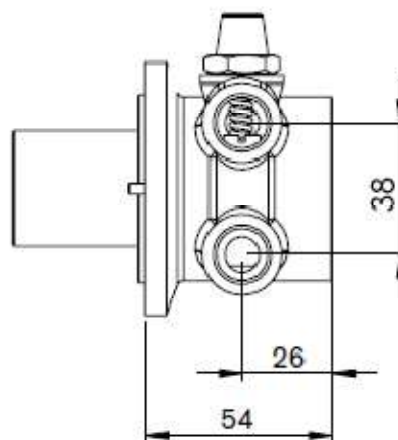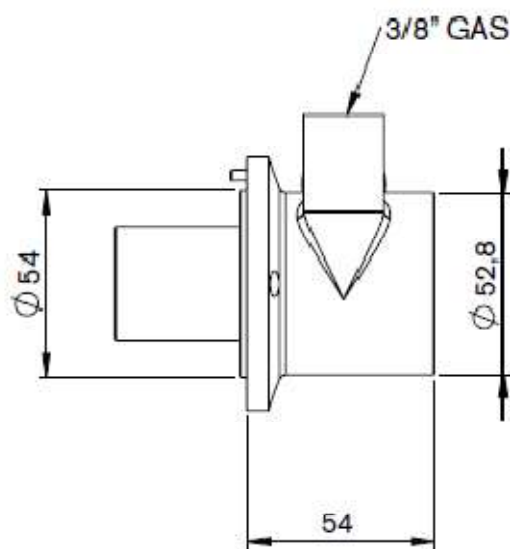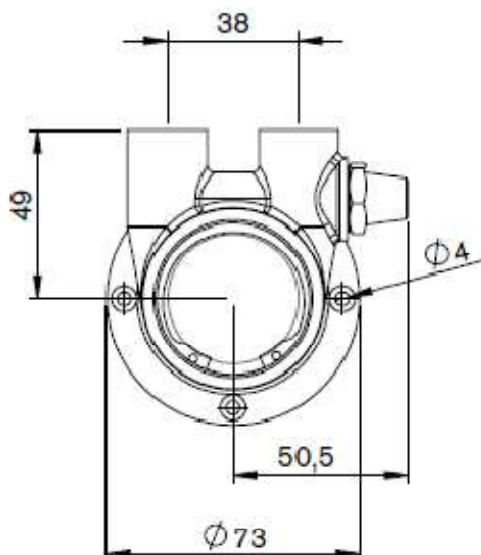

CODICE POMPA

serie	portata (L/h) a 1400 rpm				portata (GPH) a 1750 rpm			
	0 bar	5 bar	9 bar	14 bar	0 PSI	75 PSI	130 PSI	200 PSI
MAG-PR								
MAG-PR 06	90	78	63	55	29	25	21	18
MAG-PR 1	125	115	110	85	41	37	36	28
MAG-PR 15	175	160	150	135	57	52	49	44
MAG-PR 2	230	220	205	185	75	72	67	60
MAG-PR 3	320	310	295	280	104	101	96	91
MAG-PR 35	370	355	340	330	120	116	111	107
MAG-PR 4	420	405	390	380	137	132	127	124
Portate Indicative riferite a: pompa senza bypass, motore con velocità costante a 1400 rpm, acqua a 20°C (68°F)					Portate Indicative riferite a: pompa senza bypass, motore con velocità costante a 1750 rpm, acqua a 20°C (68°F)			