
Cod. CA0120006PL1

Standard and Approvals

- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller



(Image is purely indicative)

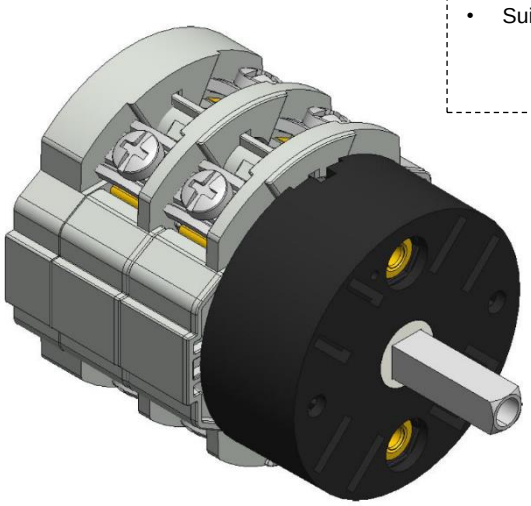


Technical characteristics: Body

- Change-over switch 2 pole
- IP00 Protection degree
- Rated operational current Ie: 12A (AC-21A)
- Rated thermal current Ith: 16A
- Rated insulation voltage Ui: 690V
- Panel Mounting
- Fixing with 2 screw at 28mm vertical
- Switching angle: 60°
- Class V2 self-extinguishing thermoplastic housing
- Assembled with metal shaft and threaded stud bolts to ensure maximum operating reliability
- Positive opening double break contacts, silver alloy made.


Technical characteristics: Knob

- Transparent plate 52x52mm and black knob
- Fixing with 2 screws at 28mm vertical
- IP 40 Protection degree

Positions

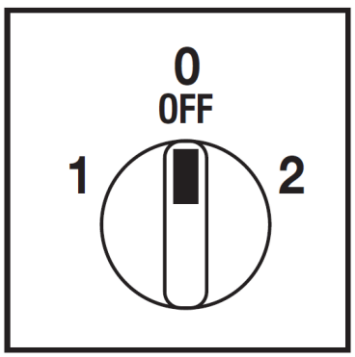

Electrical diagram



Electrical function


	2		X		X	CR CA CQ 60°
	0					
	1	X		X		
Contact		1 2	3 4	5 6	7 8	
Element		**1**		**2**		Angle

© 2017 Copyright Bremas Ersce. Subject to change without notice and errors excepted. Data reported in this paper are carefully checked and represent typical values of series production. The descriptions of the device and its applications, contexts of use, details of external controls, information on installation and operation are provided to the best of our knowledge. In any case, this does not mean that the features described may derive legal responsibilities that extend beyond the "Terms and Conditions" of Bremas Ersce. The customer / user is not absolved from the obligation to examine our information and recommendations and the relevant technical regulations before using the products for their own purposes.

Cod. CA0120006PL1

measures in mm (in)

Dimensions

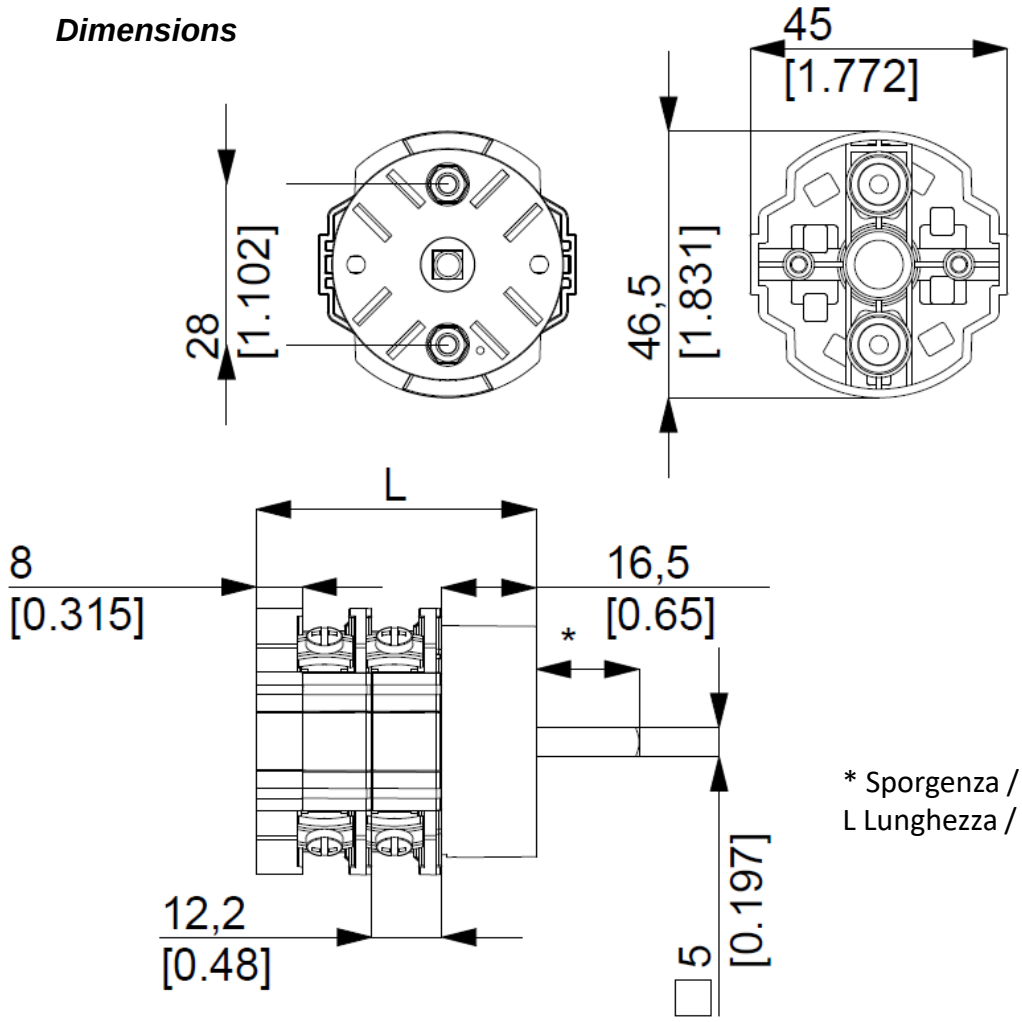

* Sporgenza / Ledge 18,00mm
L Lunghezza / Length 48,90mm

Drilling templates


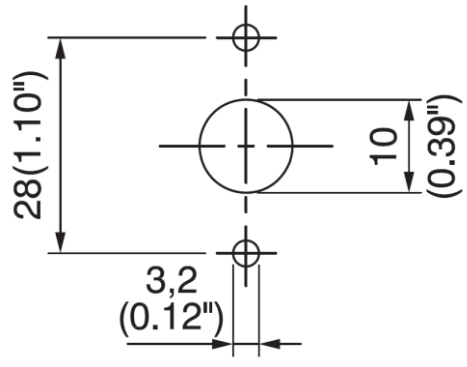


Plate & Knob

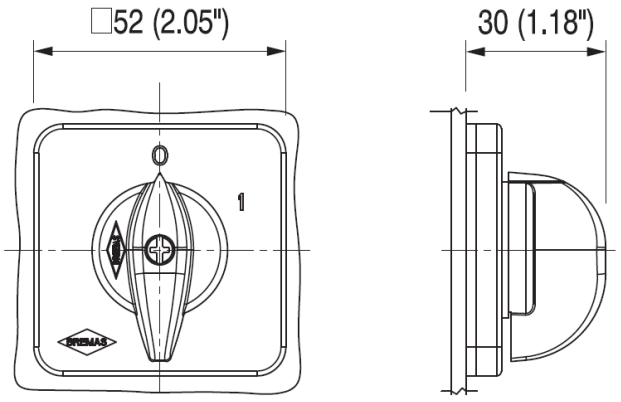

© 2017 Copyright Bremas Ersce. Subject to change without notice and errors excepted. Data reported in this paper are carefully checked and represent typical values of series production. The descriptions of the device and its applications, contexts of use, details of external controls, information on installation and operation are provided to the best of our knowledge. In any case, this does not mean that the features described may derive legal responsibilities that extend beyond the "Terms and Conditions" of Bremas Ersce. The customer / user is not absolved from the obligation to examine our information and recommendations and the relevant technical regulations before using the products for their own purposes.

Cod. CA0120006PL1

Technical data IEC 947-3 EN 60947-3				
Rated insulation voltage		Ui	V	690
Rated operating voltage		Ue	V	690
Rated impulse withstand voltage		Uimp	kV	6
Rated thermal current for open switch		Ith	A	16
Rated thermal current for enclosed switch		Ithe	A	16
Rated operation frequency			Hz	50/60
Power dissipation for each pole			W	0.27
Rated operating current				
AC-21A Switching resistive loads, including moderate overloads		Ie	A	12
AC-22A Switching of mixed resistive and inductive loads, including moderate overloads		Ie	A	12
AC-20A Connecting and disconnecting under no loads conditions				-
Rated operating power				
AC-23A Switching of motor loads or other highly inductive loads 3 phase - 3 pole		230V	Kw (A)	3 (9)
		400V	Kw (A)	4 (9)
		500V	Kw (A)	-
		690V	Kw (A)	-
AC-23A Switching of motor loads or other highly inductive loads 1 phase - 2 pole		110V	Kw (A)	0,75 (8,5)
		230V	Kw (A)	1,5 (8,5)
AC-3 Squirrel cage motors: starting, swtiching off motors during running 3 phase - 3 pole		230V	Kw (A)	2,2 (7)
		400V	Kw (A)	3,5 (7)
		500V	Kw (A)	-
		690V	Kw (A)	-
AC-3 Squirrel cage motors: starting, swtiching off motors during running 1 phase - 2 pole		110V	Kw (A)	0,37 (4)
		230V	Kw (A)	1,1 (6)
		400V	Kw (A)	-
AC-4 Squirrel cage motors: starting, pluggign, inching		230V	Kw (A)	-
		400V	Kw (A)	-
AC-15 Control of a.c electromagnetic loads		230V	A	4
		400V	A	3
Rated breaking capability in AC-23A (cos φ=0,45)		230V	A	72
		400V	A	72
Short circuit protection				
Rated short time withstand current		Icw	A	150
Rated short-circuit make capacity		Icm	A	-
Rated conditional short-circuit current		-	kA	4
With fuses class gG		500V	A	16
Technical data UL/CSA				
Rated operating voltage		Ue	UL/CSA V	600/ -
General use current		Ie	UL/CSA A	12
Short circuit rating @600Vac			Arms	5000
Fuse size (Class RK5, 600Vac, 200kA A.I.C.)			A	60
Rated operating power				
1 phase - 2 pole		120V	Hp (A)	0,5 (9,8)
		240V	Hp (A)	1,5 (10)
3 phase - 3 pole		200V	Hp (A)	1,5 (6,9)
		240V	Hp (A)	2 (6,8)
		480V	Hp (A)	3 (4,8)
		600V	Hp (A)	5 (6,1)
Mechanical characteristics				
Panel tickness		Max	mm	4
Mechanical life			Cycles x 10^6	2
			Cycles/hr	120
Connection according to IEC 9471-1 and EN 50947-1				
Connecting capability	With flexible wires	Min-Max	mm^2	2x1,5-4
		Min-Max	AWG	16-10
	With solid wires	Min-Max	mm^2	2x1,5-6
Connection terminal screw dimensions			Type	M3,5
Screw tightening torque			Nm	1
Protection degree IEC 529 EN 60529				
Terminals			IP	00
Ambient conditions				
Operating ambient temperature			°C	-25 ÷ +55
Storage ambient temprature			°C	-30 ÷ +70
Withstand to constant humid according to IEC 60068				2-78
Withstand to cyclic humid according to IEC 60068				2-30

© 2017 Copyright Bremas Ersce. Subject to change without notice and errors excepted. Data reported in this paper are carefully checked and represent typical values of series production. The descriptions of the device and its applications, contexts of use, details of external controls, information on installation and operation are provided to the best of our knowledge. In any case, this does not mean that the features described may derive legal responsibilities that extend beyond the "Terms and Conditions" of Bremas Ersce. The customer / user is not absolved from the obligation to examine our information and recommendations and the relevant technical regulations before using the products for their own purposes.