
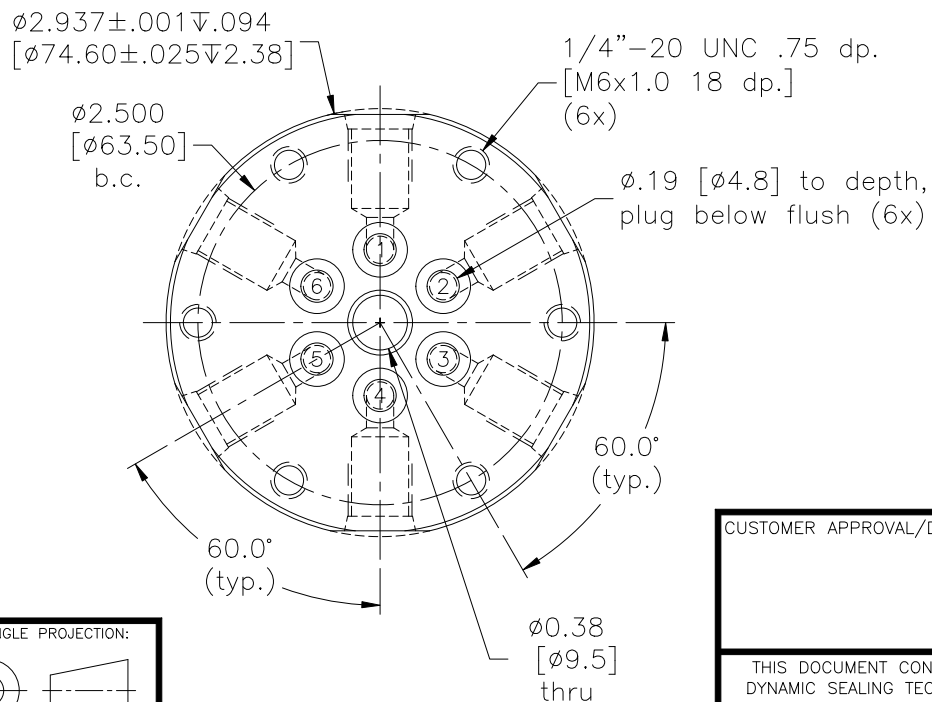
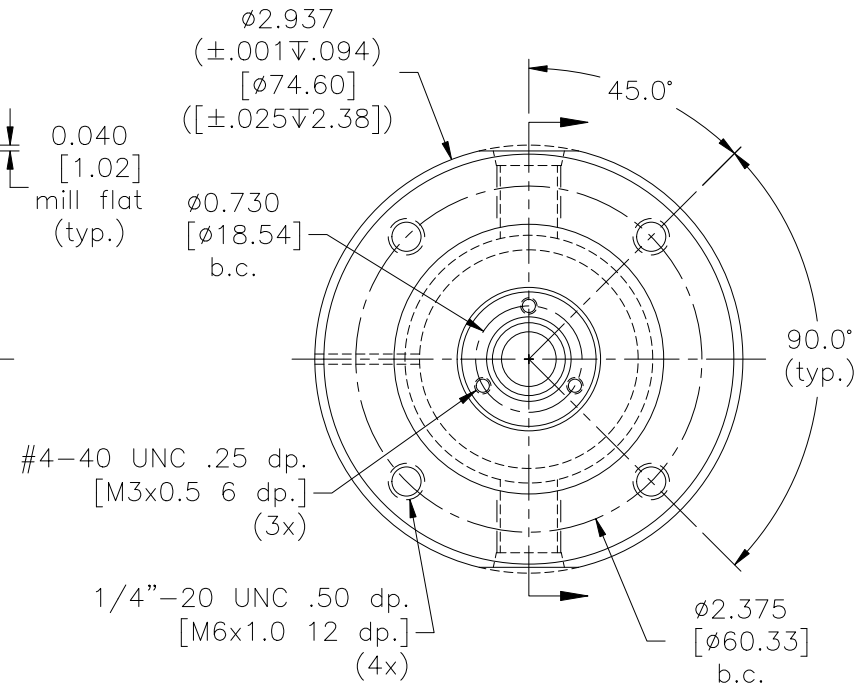


Rev:	Date	By	Chk	Description
A.1	09/18/12	PJE	RAW	ECO 0045
A.2	10/06/14	JWW	PJE	ECO 0162
A.3	07/17/19	YIP	JES	ECO 1284

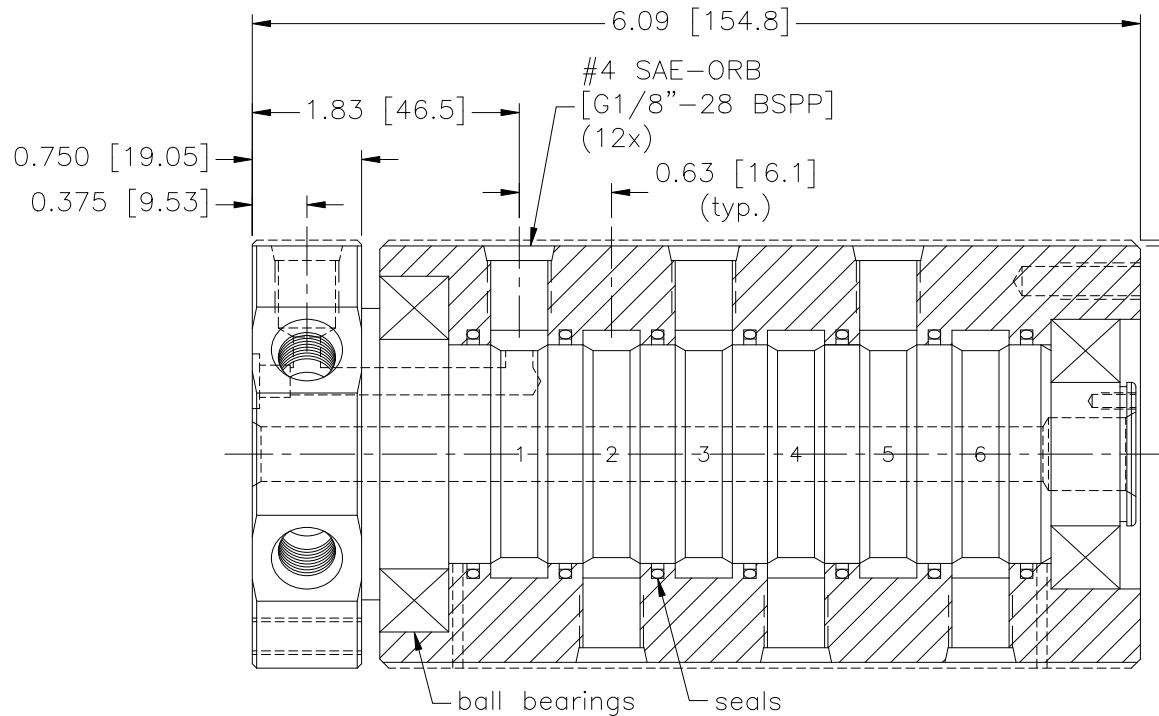

Notes:

1. Union will be rotated for seal break-in and static air tested.
2. Media must be filtered, clean and free of abrasive content or reduced union life will result.
3. Metric connections and threads available by using SEM in place of SE in the series designation prefix.
4. See SHEET 2 for product options.

Drawn	JSM	6/1/03
Checked	PJE	11/23/05
Checked	PJE	11/24/08

TOLERANCE EXCEPT AS NOTED	
X.X	±.125
X.XX	±.015
X.XXX	±.005
ANGLES	± 0.5°

SHAFT MTL/PLTNG:
CARBON STL
58-62 Rc
BLK OXIDE

HOUSING MTL/PLTNG:
CARBON STL
BLK OXIDE

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (DSTI) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR ITS CONTENTS, IN WHOLE OR PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM DSTI.



CUSTOMER:

STOCK

P/N:

SE(M)-1161

REV:

A.3

THIRD ANGLE PROJECTION:

