


product is designed and validated according to EN 12532 / EN 12533

Creo 4.0

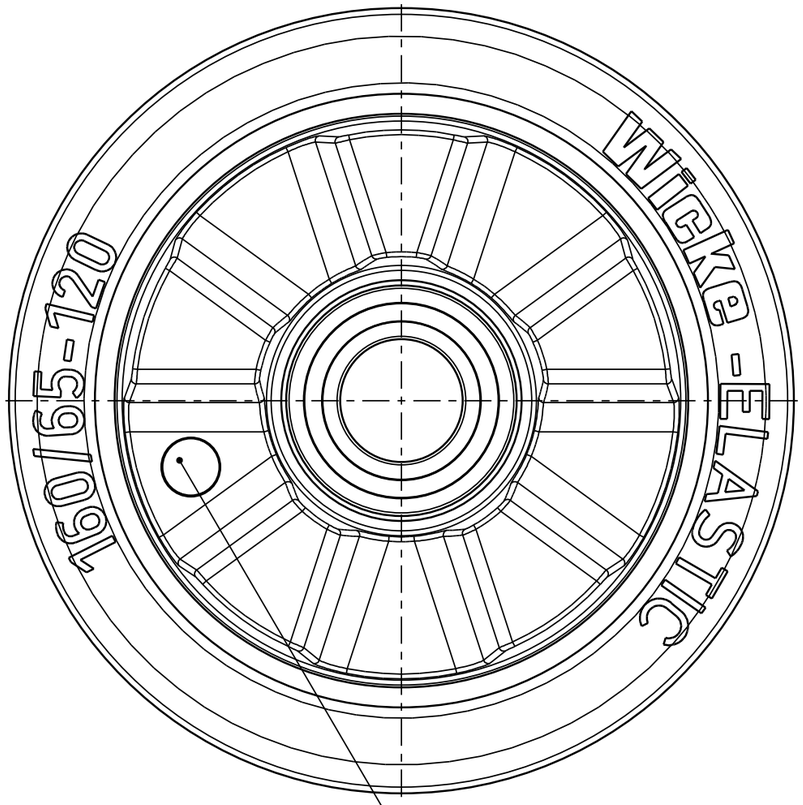

date of production: year

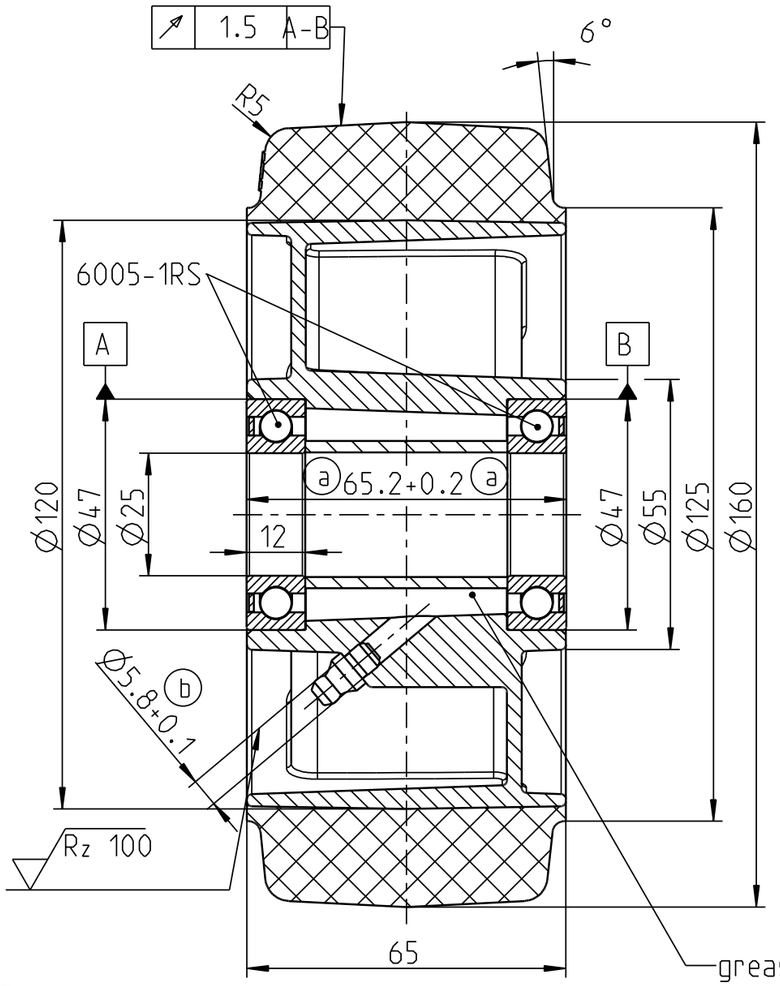

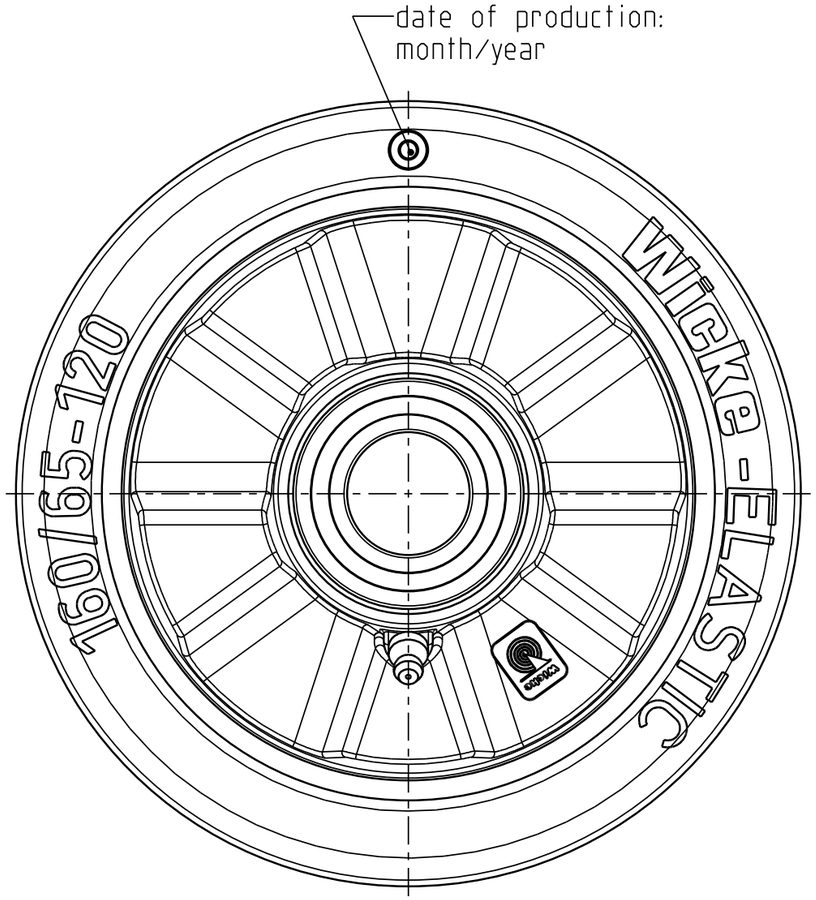



2:5



load capacity: 300 kg up to 4 km/h

Rz 100

tyre: RAL 9005 Jet black
Shore A: 63±3

Please note

copy of drawing is scaled down

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Wicke GmbH + Co.
Elberfelder Straße 109
D-45549 Sprockhövel-Herzkamp

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rigths reserved in the event of the grant of a patent, utility model or design.

rev.	description	date	sign.
b	Ø5.2 to Ø5.8 grease nipple amended	23.04.21	Büs.
a	spacer removed; Unit D to Unit C	06.11.20	Büs.

accept. tolerances: EN ISO 8015, EN ISO 1101, ISO 2768-mK
surface: EN ISO 1302

	date	signatures
drawn by	21.10.20	Büscher
checked	21.10.20	Lange
standard		
change checked	23.04.21	

scale 4:5 | weight 1.327 kg

Material: tyre: Elastic-vulcanised
rim: GD-AlSi9Cu3

title: **wheel**
DE 160/ 65/5K-S (a)

Unit: D ☐ C ☒

drawing number: **178777**

sheet 2/2 | A3

repl.for: | replaced by:

Notice of protected right ISO 16016