


Principal Regulator (Remote Operated) – R21 / 31 / 41-XX-RXX

Remote-control Dial-Air™ Regulator

Incorporates all the features of the standard Dial-Air™ Regulator plus the additional advantage of remote installation using the R11 model Pilot Regulator. Maximum inlet operating pressure and temperature ratings are 300 PSIG (20.7 bar) and 150°F (65.5°C).

The Remote-control Dial-Air™ Regulators are available in five pipe sizes, with 1/4" NPT connections on the pilot regulator and pilot port of remote-controlled regulators. Typical installation is shown below. For other remote models, see R21, R31 & R41.

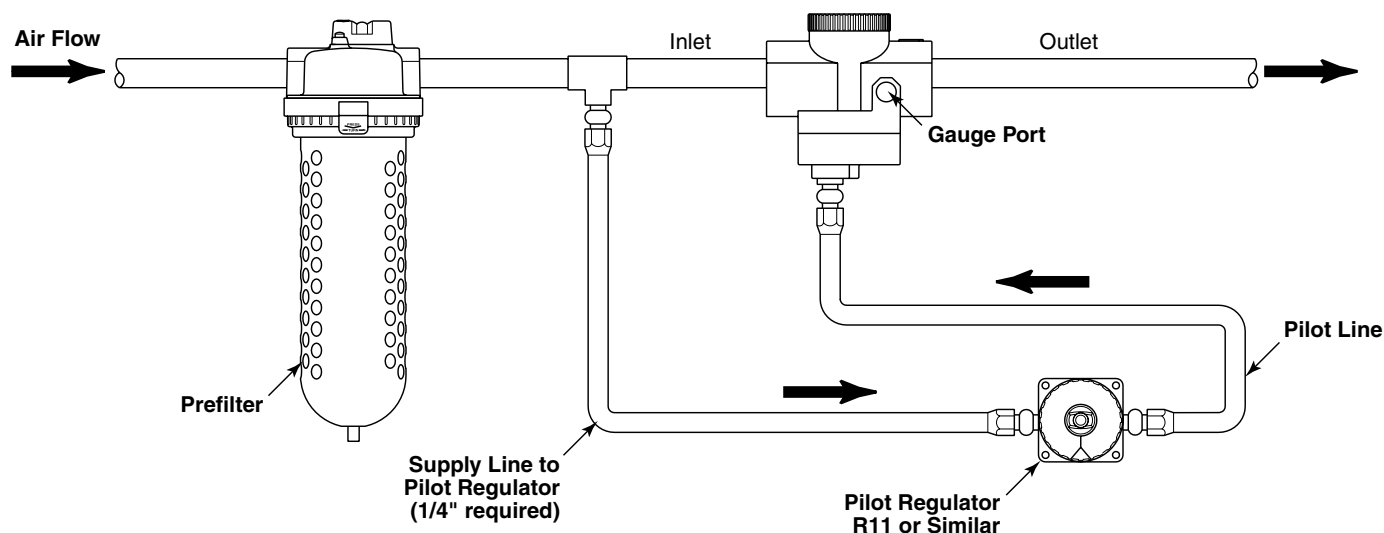


Dial-Air™

Dial-Air™ regulators feature a transparent, pressure-calibrated, non-rising adjustment dial for quick adjustment of secondary pressure. If a gauge (R21, R31, R41) is required for monitoring reasons, two 1/4" gauge ports are provided; however, these are usually used for additional outlet ports. The full reduced pressure range can be dialed in less than 270° of dial rotation. This feature is particularly advantageous if secondary pressure must be changed frequently. The transparent dial can be color or graphics coded for easy reference to required pressure changes. Dial-Air™ regulators can be mounted in any position so dial face is always visible. All Dial-Air™ units have a slight constant air bleed: 0.05 SCFM (0.024 dm³/s), @100 PSIG (6.9 bar) inlet and 90 PSIG (6.2 bar) outlet.

Dial-Air™ Regulator Numbering System

 = "Most Popular"

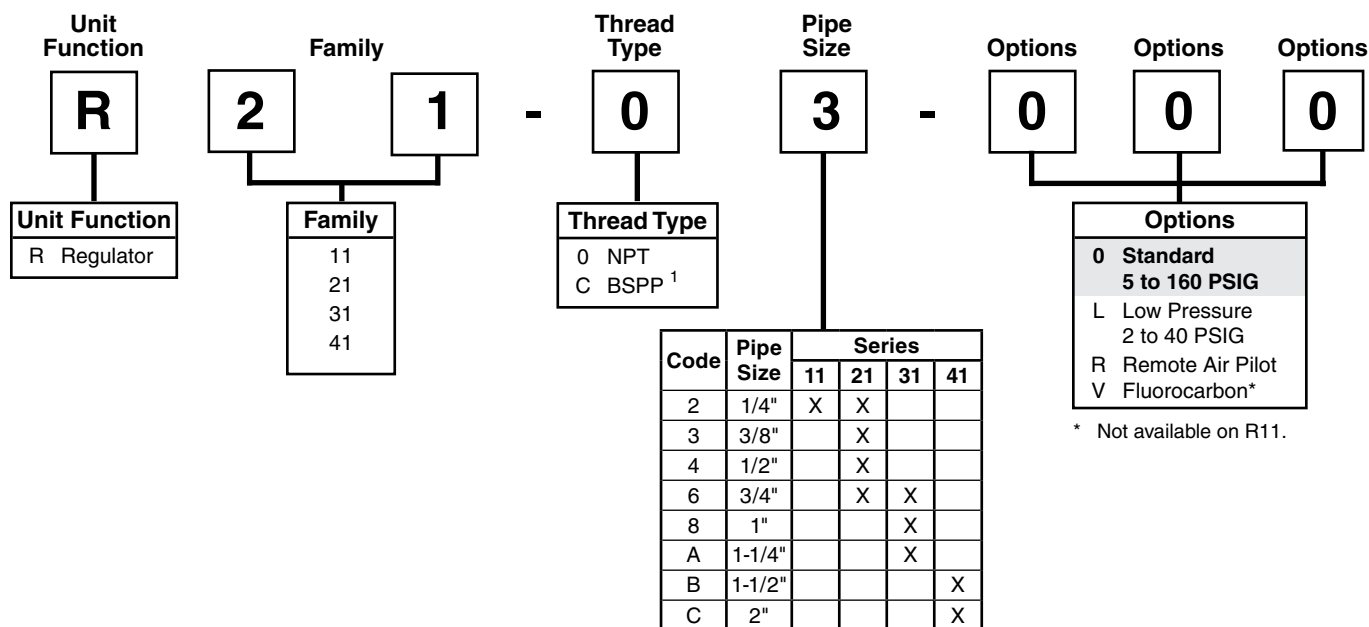
¹ ISO, R228 (G Series)

NOTE: Standard pressure adjustment is plastic “snap lock” knob and plastic bonnet with plastic panel mount nut.

NOTE: When selecting from the options columns, please enter letters in alphabetical order for positions 6, 7, and 8.
For example:

R21 - 0 3 - 0 0 0


Dial-Air™ Regulator R41



R41-0B-000

Features

- Balanced Valve Design
- Non-Rising Pressure Adjusting Dial
- High-Relief Flow (3/16" Relief Orifice)
- Two 1/4" NPT / BSPT-Rc Gauge Ports, Usually Used for Additional Outlets
- Piston Operated

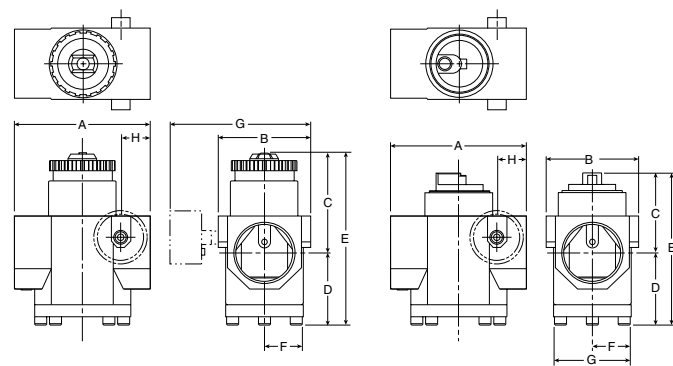

Remote Operated

Dimensions

Models	Inches (mm)	A	B	C	D	E	F	G	H
Standard Unit R41-XX-000		5.31 (135)	3.58 (91)	4.02 (102)	2.79 (71)	6.81 (173)	1.79 (45.7)	— —	1.15 (29.2)
With Gauge (order separately) R41-XX-XXX		5.31 (135)	3.58 (91)	4.02 (102)	2.79 (71)	6.81 (173)	1.79 (45.7)	5.29 (134.6)	1.15 (29.2)
Remote Operated R41-XX-R00		5.31 (135)	3.58 (91)	3.11 (78.9)	2.79 (71)	5.90 (149.8)	1.50 (38)	3.00 (76)	1.15 (29.2)

 = "Most Popular"

Specifications

Flow Capacity*	1-1/2, 2	1600 SCFM (755 dm ³ /s)
Adjusting Range Pressure	0 to 160 PSIG (0 to 11 bar)	
Bleed Rate	0.05 SCFM (0.024 dm ³ /s)	
Maximum Supply Pressure	300 PSIG (20.7 bar)	
Operating Temperature	32° to 150°F (0° to 65.5°C)	
Port Size	NPT / BSPP-G	1-1/2, 2
Gauge Port (2 ea.)	NPT / BSPT-Rc	1/4
Weight	lb. (kg)	9 (4.1)

* Inlet pressure 100 PSIG (6.9 bar). Secondary pressure 80 PSIG (5.5 bar).

Materials of Construction

Body	Zinc
Bonnet	Zinc / Brass
Piston	Zinc
Seals	Nitrile
Springs	Steel
Valve Assembly	Brass / Nitrile / Acetal

WARNING

**Product rupture can cause serious injury.
Do not connect regulator to bottled gas.
Do not exceed maximum primary pressure rating.**

CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design.



For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

Replacement Kits

Adjustment Dial Knob	RRP-16-024-000
Conversion Kit (Series A to Series B)	RRP-95-766
O-ring, Repair Kit	GRP-95-262
Piston, Bottom and O-ring Seal.....	RRP-95-192
Spring, Regulating, Belleville Washer –	
2 to 40 PSIG (0.1 to 3 bar)	RRP-95-906
5 to 160 PSIG (0.4 to 11 bar)	RRP-95-905
Spring, Valve	RRP-95-024
Valve –	
Main with O-ring Seal.....	RRP-95-153
Main (Remote) with O-ring Seal	RRP-96-951
Pilot with O-ring and Valve Spring	RRP-96-935

Accessories

Gauge, Pressure –	
0 to 60 PSIG (0 to 4 bar), 2" Dial Face,	
1/4" NPT, CBM	K4520N14060
0 to 160 PSIG (0 to 11 bar), 2" Dial Face,	
1/4" NPT, CBM	K4520N14160
0 to 160 PSIG, 1-3/4" Digital Round,	
1/4" NPT	K4517N14160D
Tamper Resistant Kit.....	RRP-95-585
Wall Mounting Bracket, Gauge Port Adapter,	
1/4" NPT	RRP-95-590

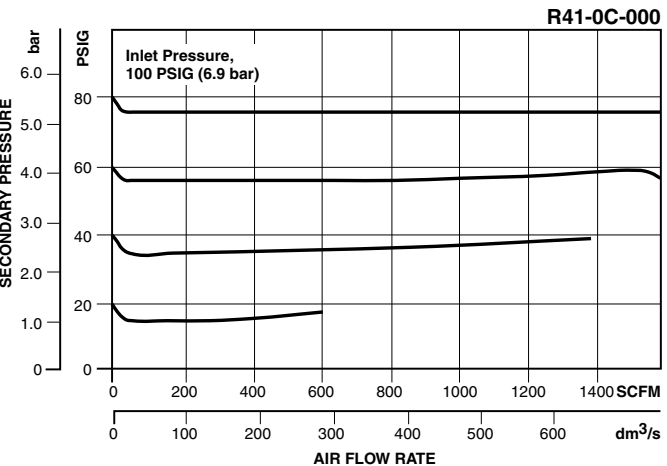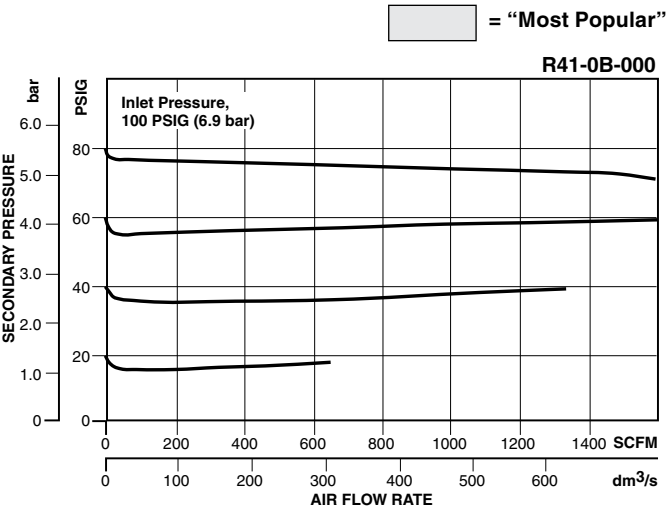

Ordering Information

Model Type	Port Size	High Flow 5 to 160 PSIG (0.4 to 11 bar)	Low Pressure 2 to 40 PSIG (0.1 to 3 bar)	Remote 5 to 160 PSIG (0.4 to 11 bar)
Relieving	1-1/2	R41-0B-000	R41-0B-L00	R41-0B-R00
	2	R41-0C-000	R41-0C-L00	R41-0C-R00

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.