
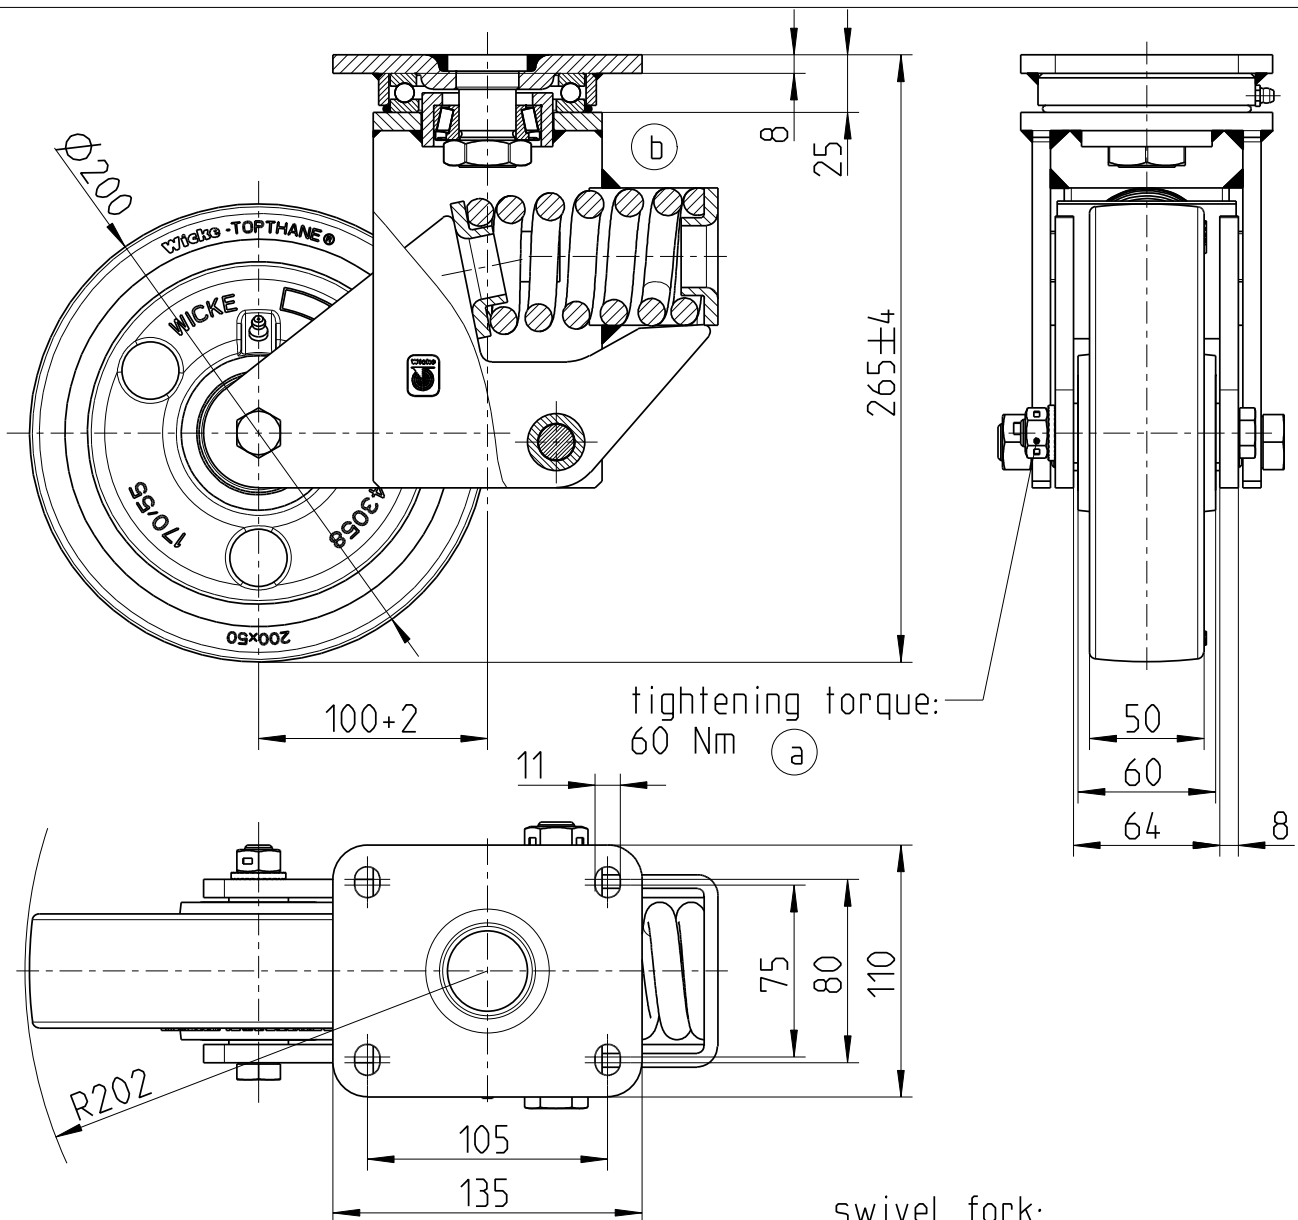


1:10



pre-load: 750 N  $\pm$  250 N  
 max. load: 5500 N  $\pm$  750 N  
 spring deflection: 25 + 8 mm

load capacity: 1000 kg up to 6 km/h

swivel fork:  
 LLAKF 3/4 / 212717  
 yellow chromated

wheel:  
 PG 200/50/4K / 107608  
 tyre: Topthane® 92 Shore A  
 rim: EN-GJL-HB215  
 RAL 5013 cobalt blue  
 ball bearing: 6304 Z

axle:  
 A 63/4K-12x 95 / 210891 (a)

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights are reserved in the event of the grant of a patent, utility model or design.

accept. tolerances  
 EN 12533

surface

scale 3:10

weight 11.691 kg

Material

| rev. | description         | date     | sign.   |
|------|---------------------|----------|---------|
| b    | swivel fork amended | 22.10.15 | Mittelm |
| a    | 155755 to 210891    | 14.01.14 | Bgt.    |

| date                    | signatures |
|-------------------------|------------|
| drawn by 17.12.13       | Baumgardt  |
| checked 17.12.13        | Lange      |
| standard                |            |
| change checked 22.10.15 |            |

| title                | Unit:                                 |
|----------------------|---------------------------------------|
| swivel castor        | <input checked="" type="checkbox"/> D |
| PG LLAKF 3/4/200/50K | <input type="checkbox"/> C            |
| drawing number       | sheet                                 |
| 218406               | 2/2                                   |
| repl. for:           | replaced by:                          |
|                      |                                       |

