


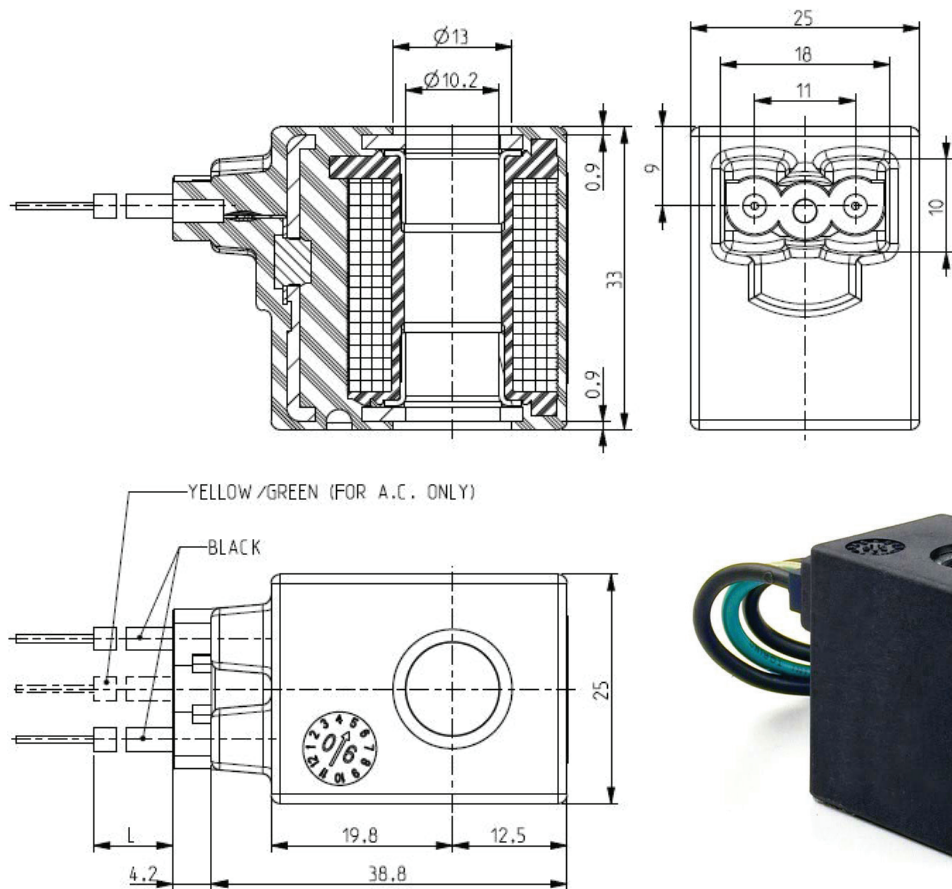

General Features

Complying with 2014/35/EU directive.
Product in accordance with the RoHS 2 directive.
100% inspected.

Electric Connections

N° 3 wires AWG 20 (2 line + earth) for AC model, length as per table.
N° 2 wires AWG 20 (2 line) for DC model, length as per table.

Encapsulation Materials

PET (polyethylene terephthalate) fiberglass reinforced (black colour)

Technical Features

Continuous Duty		ED
Insulation class		F (155°C)
Ambient temperature		-10°C +60°C
Protection degree		IP 66 (EN 60529)
Voltages	DC	12-24V (+10% -5%)
	AC	24V/50-60Hz - 110V/50-60Hz (120V/60Hz) - 230V/50-60Hz (+10% -15%)
		(Other voltages and frequencies on request)

Type	Power absorption		DC (W)	Cable free length (L)	Notes	Weight (kg)
	AC (VA)					
	Inrush	Holding				
Z615A	16	10	6	400	-	0,095
Z615Y				1500		0,120