

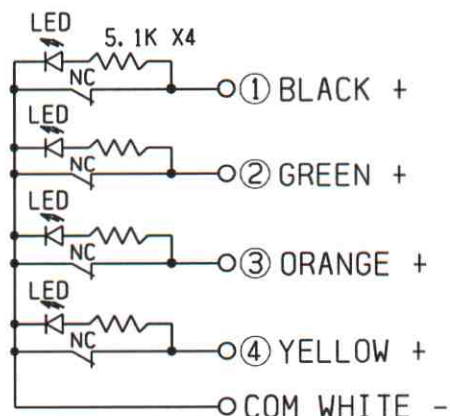
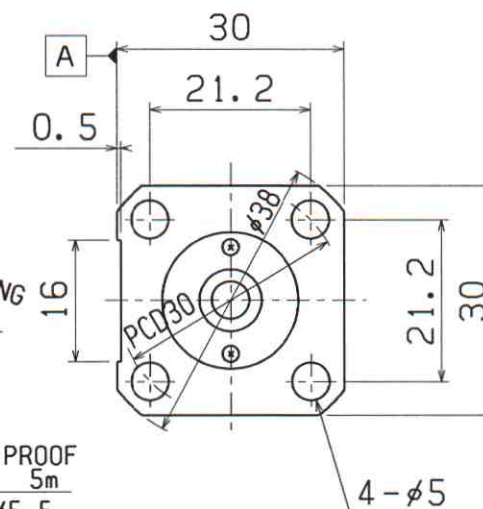


OPERATING MODE : NORMALLY CLOSED
 REPEATABILITY OF SKIP SIGNAL : 0.001mm
 RECOMMENDED OPERATING SPEED : 50~200mm/min
 RATING : DC24V 20mA(Max)
 (RECOMMENDED 10mA)NON-INDUCTIVE LOAD
 DEGREES OF PROTECTION : IEC IP67

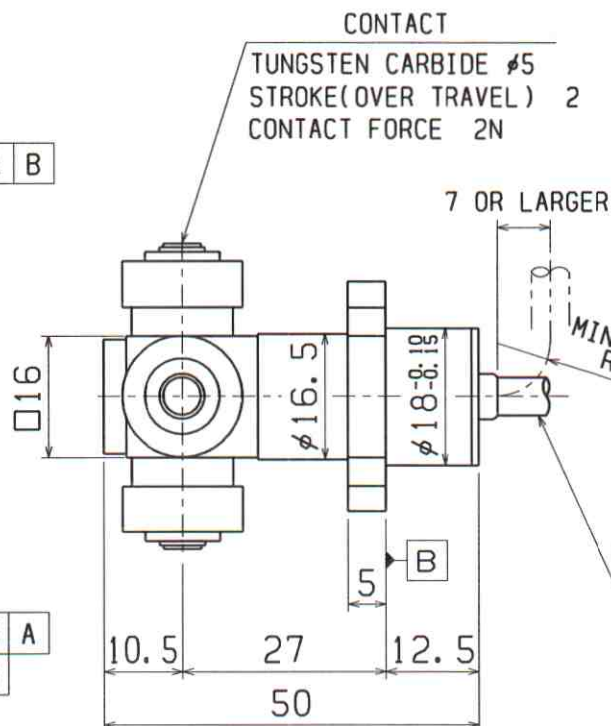

4-LED LAMP(RED)
 NORMALLY UNLIT
 PUSH LIT

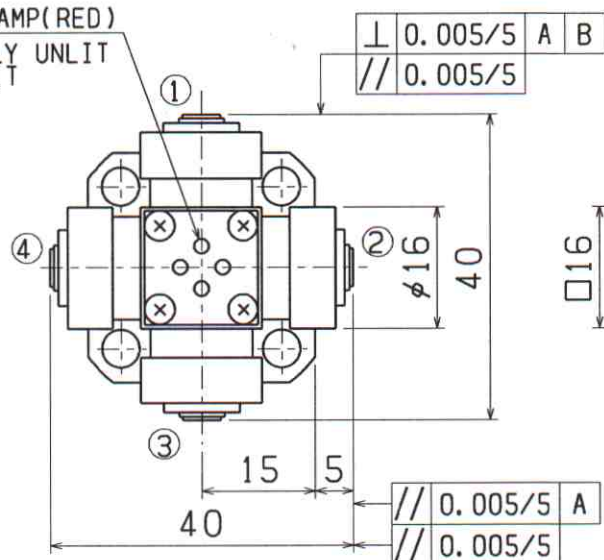

SET NUMBER H4A-12-104S

COMPOSITION SENSOR HEAD H4A-12-104H
POLARITY CONVERTOR UNIT BA-4A

				NAME	TOOL SETTING
				DRAWING NUMBER	PROBE
APR	CHK	DRA			H4 A-12-104S
		01.10.12 HIJIKATA	1/1		METROL