DTW130517-130520

ProTronic Digital Torque Wrenches - Models 100 to 340

PRODUCT DETAILS

- Dual progressive LEDs positioned both sides of the wrench provide an easy visual representation of torque progress allowing the user to more easily anticipate torque target
- Large LCD screen with bright backlight; numbers become larger and bolder during active torque for optimal viewing
- Four alert modes (LCD, progressive LED, audible, tactile) provide excellent feedback in all working conditions
- 5 easily selectable torque units (N·m, lbf·ft, lbf·in, dN·m, kg·cm and kg·m)
- The ability to programme up to 10 pre-sets in the tool saves time in setting up frequently occurring applications
- A wide range of advanced features (cycle counter, customisable sleep timer, language selection, auto torque calculation for torque adaptors, calibration alerts, battery level indication, and numerous alert mode customisations) allow the user to tailor the tool to their work preferences
- Torque THEN Angle mode gives the user the ability to conveniently apply an angle to a fastener directly after achieving a torque target without the need to remove the torque wrench from the application
- Settings allow for operation in either English, Spanish, French, German, Italian, Dutch or Portuguese
- Power interruption technology helps to prevent loss of work and continuity if the wrench is impacted
- Patent pending built-in calibration factor feature allows different head lengths to be easily accommodated
- Storage case included
- Supplied with a traceable 'Calibration Certificate' allowing end users to adhere to more stringent quality control processes
- Angle accuracy of ±1% of reading, ±1° @ Angular Velocity >10°/Sec <180°/Sec
- Accuracy of ±2% when operating between 20% to 100% of tool capacity
- Accuracy of ±4% when operating between 5% to 19%
- Assembled in the USA

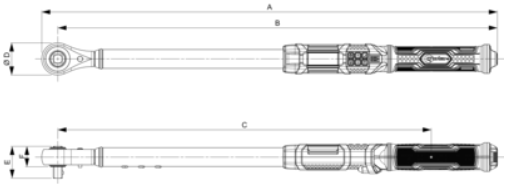

PRODUCT ATTRIBUTES

Product	N·m	A	B	C	D	E	F	kg
130517	5-100 N·m	458 mm	439 mm	344 mm	38 mm	34 mm	21 mm	1.15 kg
130518	5-100 N·m	462 mm	439 mm	344 mm	46 mm	45 mm	29 mm	1.3 kg
130519	10-200 N·m	650 mm	627 mm	533 mm	46 mm	45 mm	29 mm	1.65 kg
130520	17-340 N·m	749 mm	723 mm	629 mm	52 mm	45 mm	29 mm	1.85 kg