
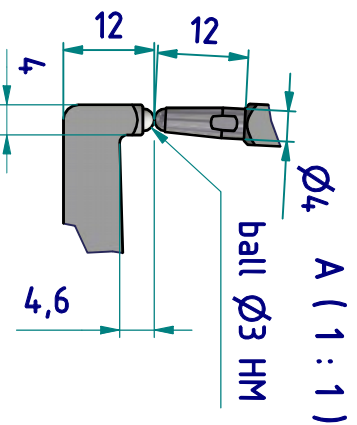
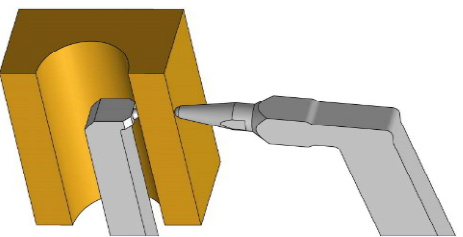
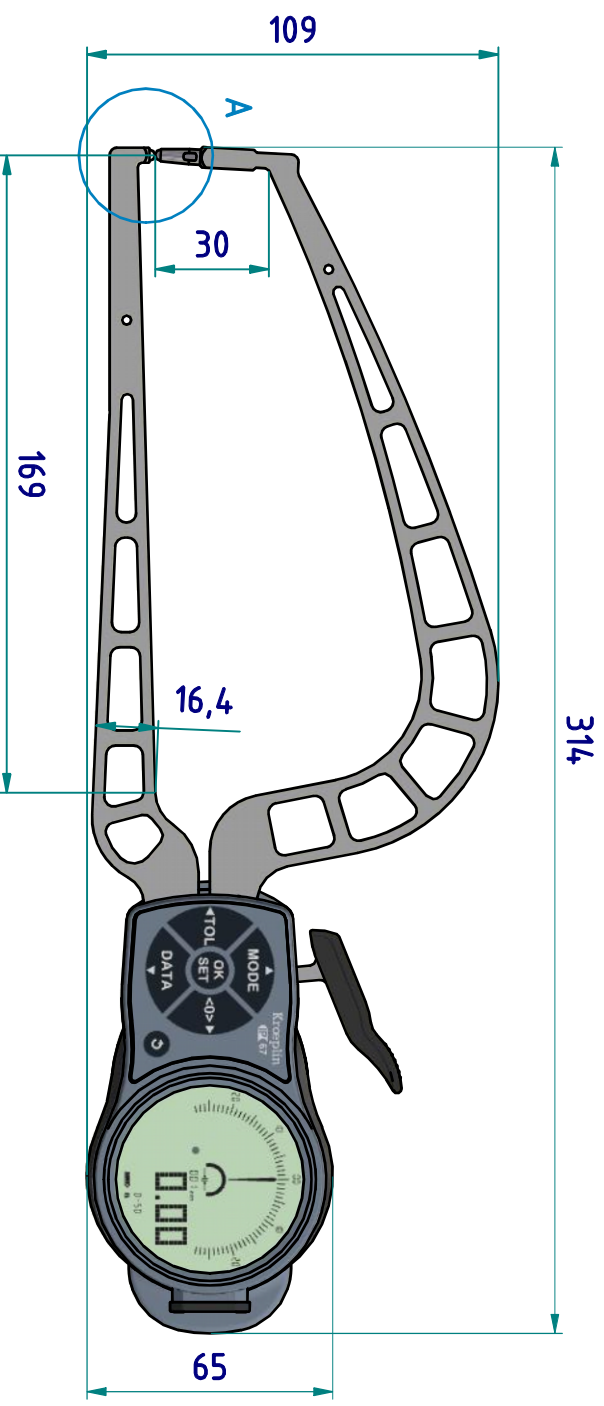


subject to technical alterations

type:	K	acceptable deviations VDI/VDE/DGQ 2618 Bl. 12.1/13.1)	scale:	1:2
range:	0 - 50 mm	max. permissible errors "G":	drawing-nr.:	DAB-K4R50-K-e
range of indication:	0 - 50,5 mm	repeatability "r":	date of issue:	05.03.2021
digital step:	0,01 mm	reference temperature:	name:	B. Schmidt
scale interval:	-	operation temperature:	revision status:	
measuring force:	0,8 - 1,7 N	storage temperature:	revision date:	
weight:	460 g			

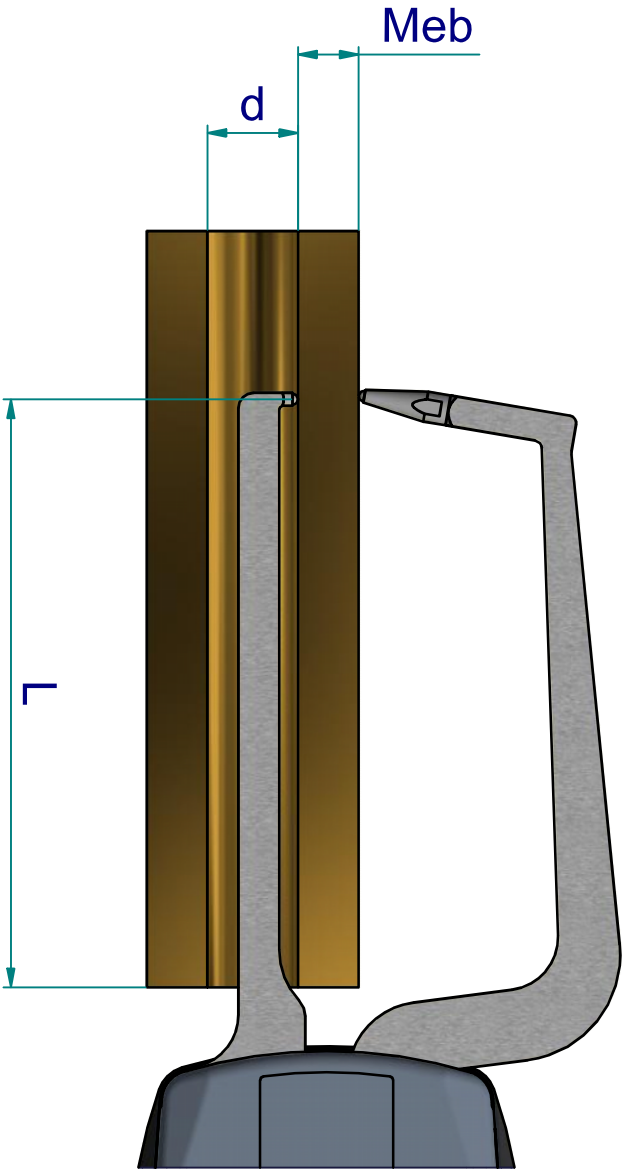

measuring capacity

		measuring range Meb [mm]									
		0,5	2	4	6	8	10	12	15	18	20
13	23,4	8,5	6,2	5,6	5,5	5,6	5,8	6,3	7,1	7,8	
14	76,4	39,1	28,9	26,2	25,6	26,0	26,9	29,3	32,8	35,9	
15	94,1	67,9	50,4	45,9	44,8	45,4	47,1	51,1	57,2	62,7	
16	112,65	81,3	70,3	66,5	65,0	65,9	67,8	70,8	74,9	78,3	
17	130,4	94,1	81,4	77,5	76,5	77,0	78,5	82,0	86,7	90,6	
>18	148,9	107,5	93,1	88,5	87,4	88,1	89,8	93,7	99,1	103,5	
L											

L = maximum usable arm length [mm]


Example:
d = 14 Meb = 4 L = 28,9

subject to technical alterations

drawing-nr.:
date of issue:
name:
revision status:
revision date:

DAB-K4R50-K-e
05.03.2021
B. Schmidt

interface as accessories available:

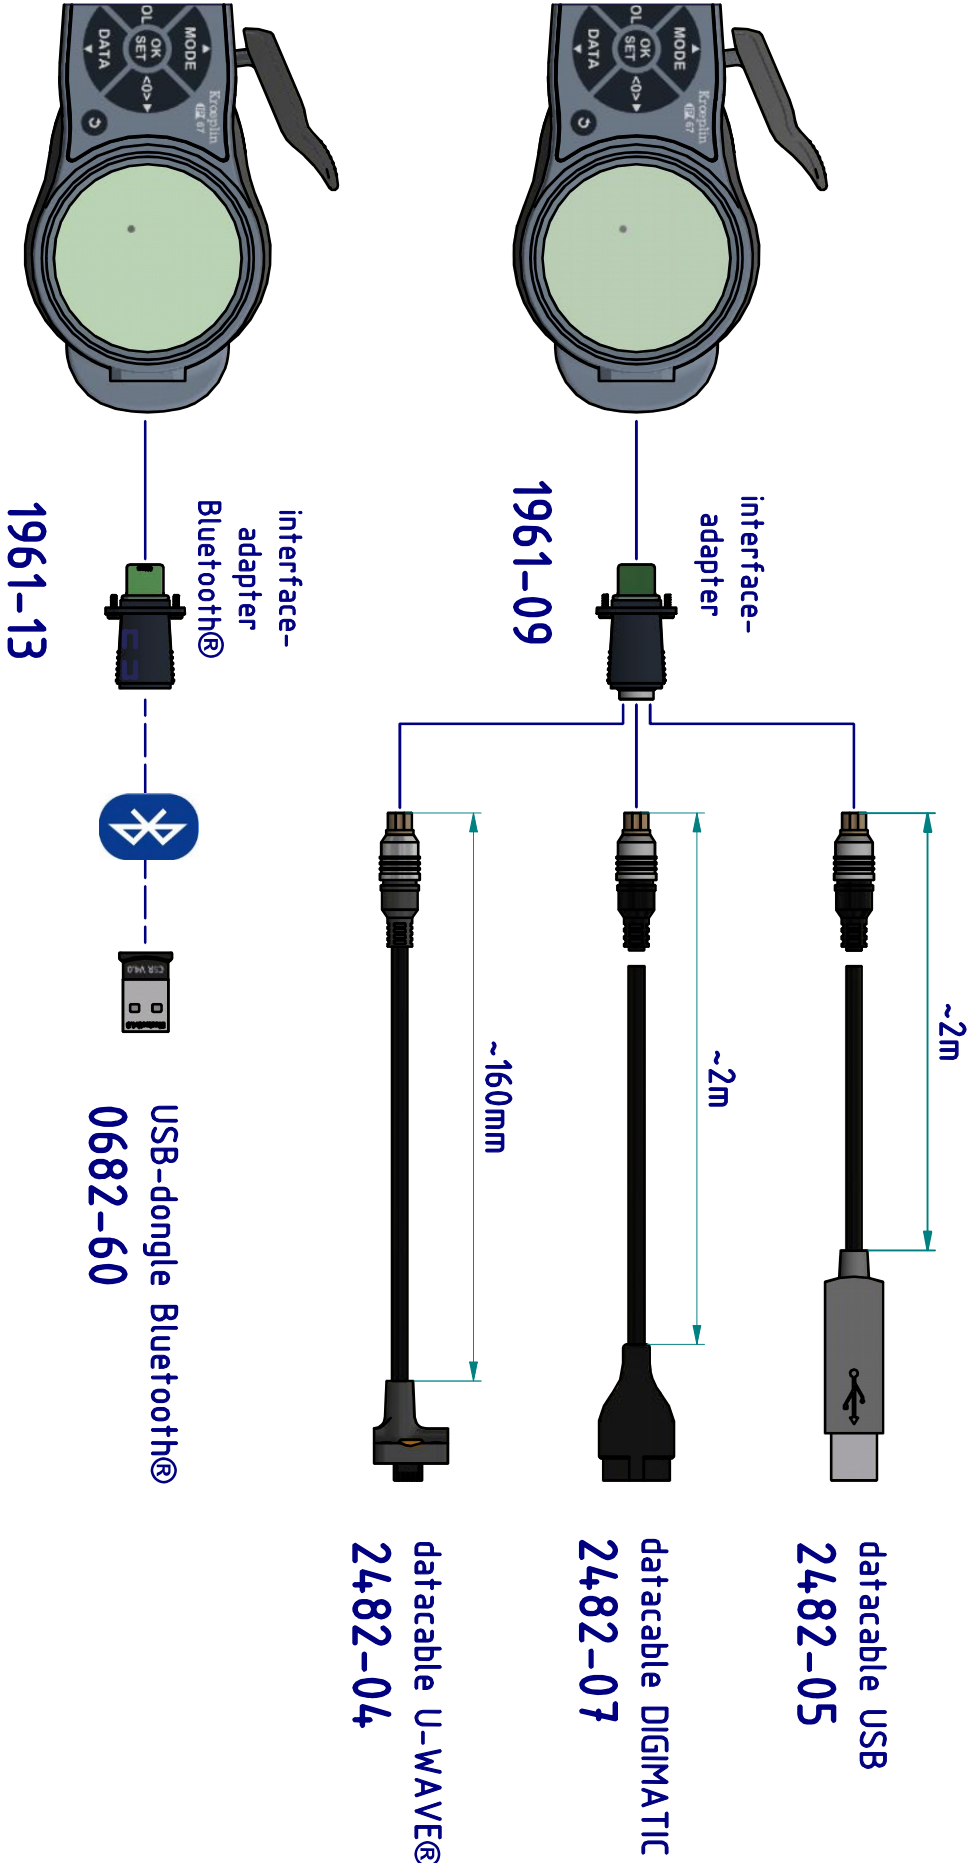

subject to technical alterations

drawing-nr.: DAB-K4R50-K-e
date of issue: 05.03.2021
name: B. Schmidt
revision status:
revision date: