


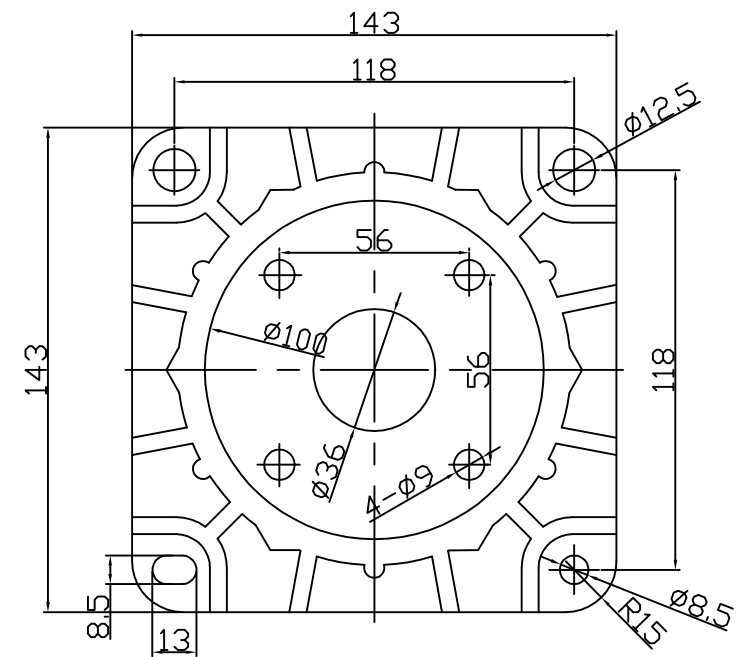

1. The finished product shall not have bubbles and cracks, smooth surface, no burrs;
2. It must be able to withstand the frequency voltage for 42KV minutes;
3. The screw holes shall not leak into the mixed rubber.

[illegible]