
E5 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1/2” Bolted Metal – ATEX


with Metal Center Section

PERFORMANCE

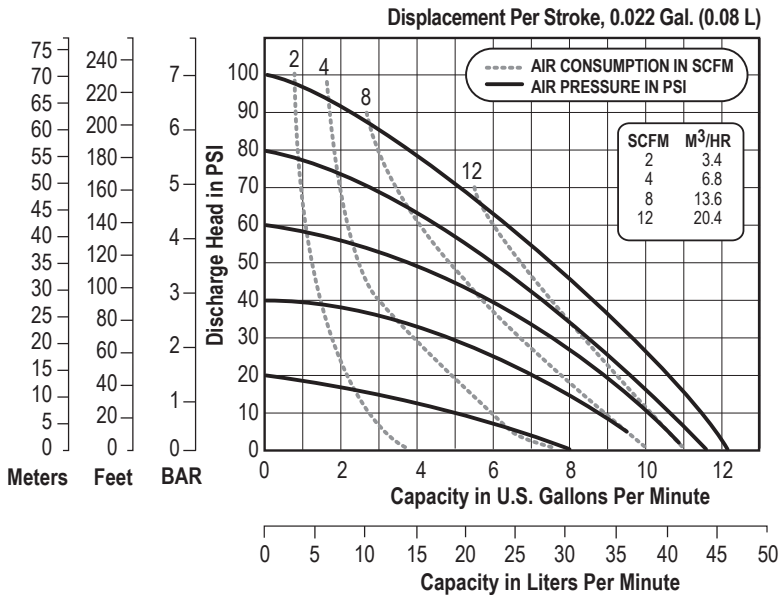

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

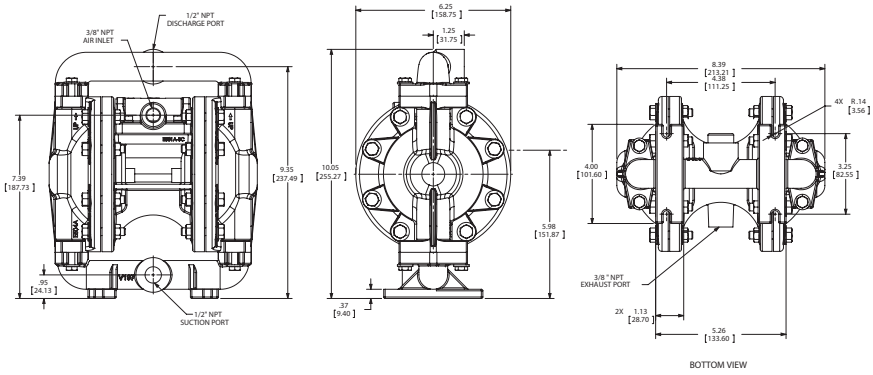

SPECIFICATIONS

Flow Rate

Adjustable to . . 0-12 gpm (45.4 lpm)

Port Size

Suction . . . . . 1/2” NPT

Discharge . . . . . 1/2” NPT

Air Inlet . . . . . 3/8” NPT

Air Exhaust . . . . . 3/8” NPT

Suction Lift

Dry . . . . . 13’ (3.9 m)

Wet . . . . . 22’ (6.7 m)

Max Solid Size (Diameter)

. . . . . 1/16” (1.6 mm)

Max Noise Level . . . . . 84 dB(A)

Shipping Weights

Aluminum . . . . . 11 lbs (3.9 kg)

Stainless . . . . . 17 lbs (7.7 kg)

Alloy C. . . . . 17 lbs (7.7 kg)

