


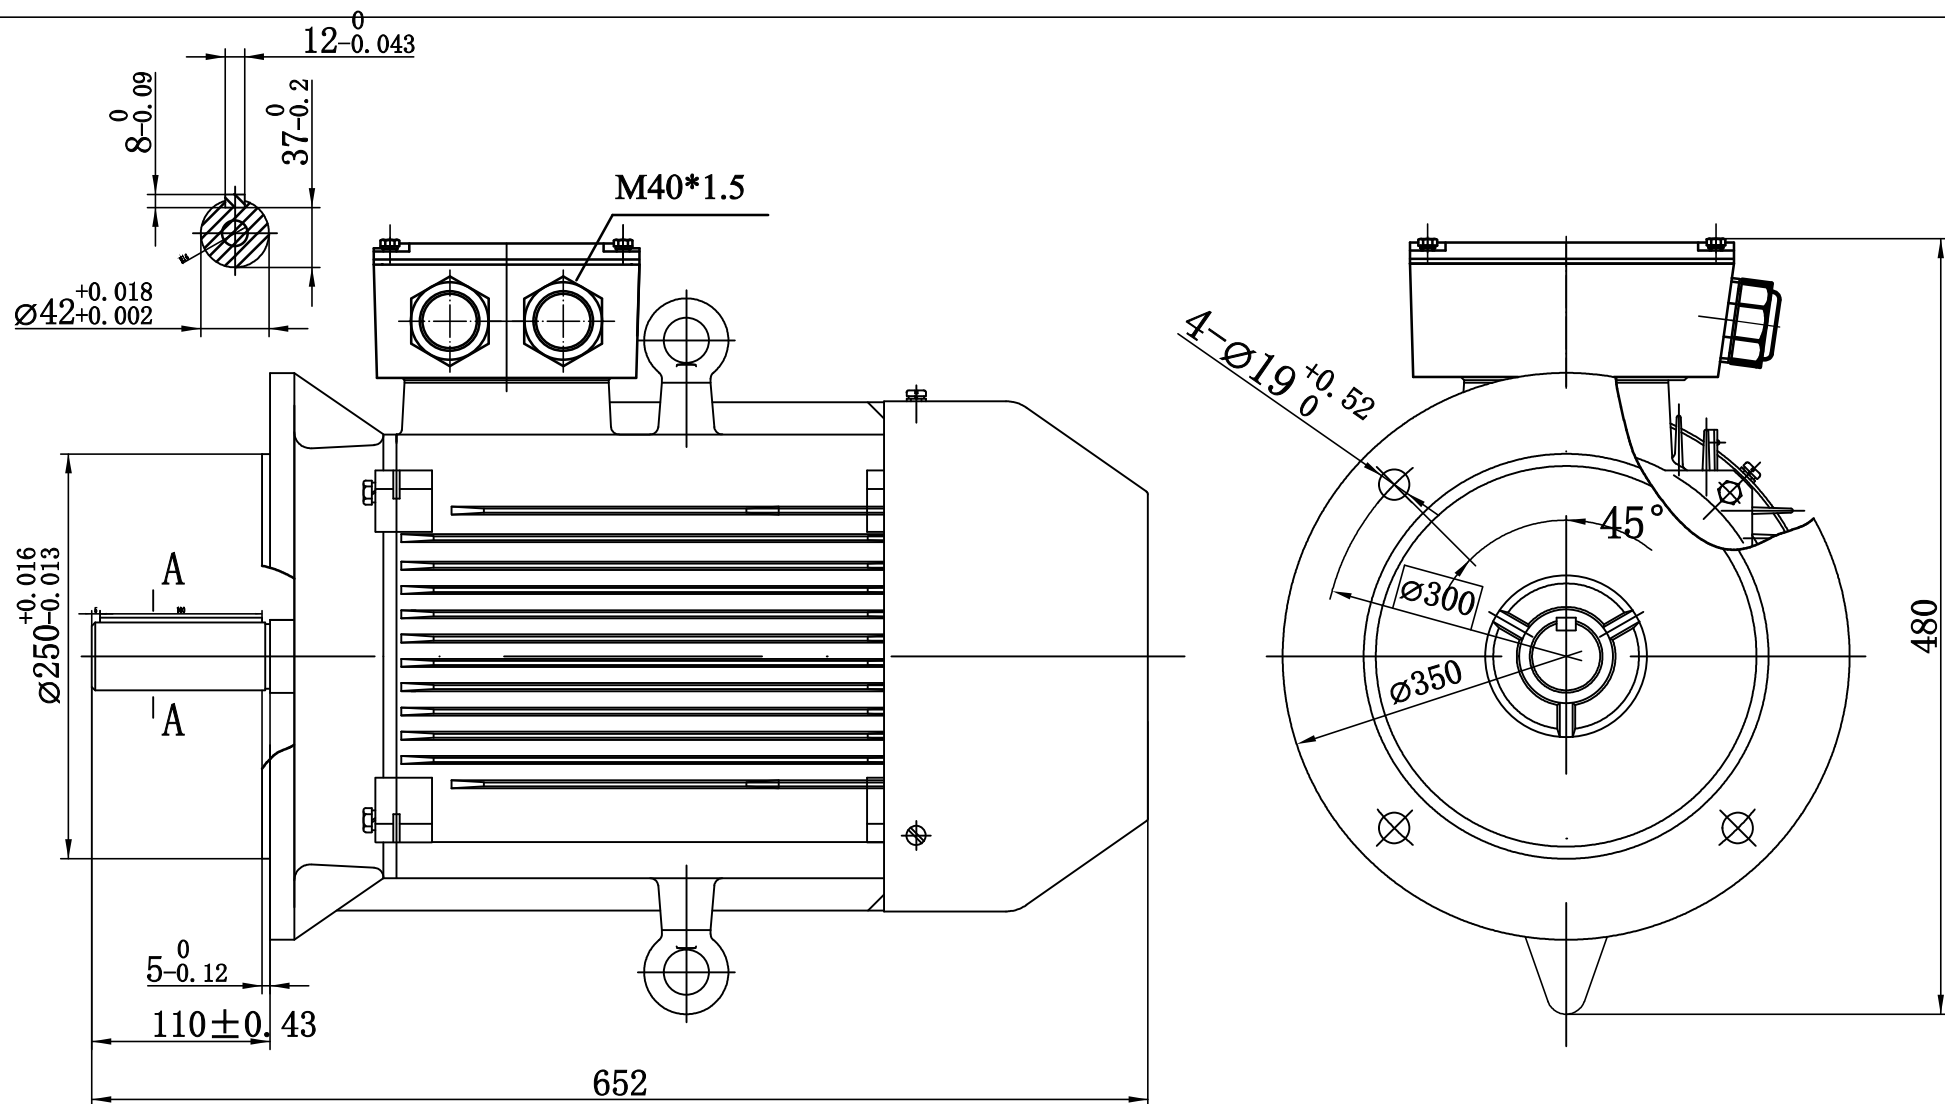

TYPE	POWER (kW)	CURR. (A)	VOLT. (V)	FREQ. (Hz)	EFF. (%)	COSØ	T _{loc} /T _n	T _{max} /T _n	I _{loc} /I _n	IP.	INS.	CONN.	DUTY	IC.	IM.	NOTE
IE4-160M-4	11	20.5	400	50	93.3	0.83	2.0	2.3	9.5	IP55	F	△	S1	IC411	B5	

NOTE1: THE FUNCTION DATE IS THE STANDARD. OTHERS IS THE DESIGN DATE.

NOTE2: WHEN THE ALPHABETICAL ORDER OF THE MOTOR TERMINAL AND THE POWER SUPPLY IS IN THE SAME SEQUENCE, FACING THE SHAFT EXTENSION, THE DIRECTION OF ROTATION OF THE MOTOR SHOULD BE CLOCKWISE.

NOTE3: ALTITUDE NOT OVER 1000M, AMBIENT TEMPERATURE OF -15°C~40°C.

SIDO
ELEKTROMOTOREN

Bernhard SIDO Ing. GmbH
Anckelmannstrasse 33
D-20537 Hamburg
Email: sido@sido-elektromotoren.de