






2-way ball valves with threaded connector

Steel · DN 4 - DN 40/25

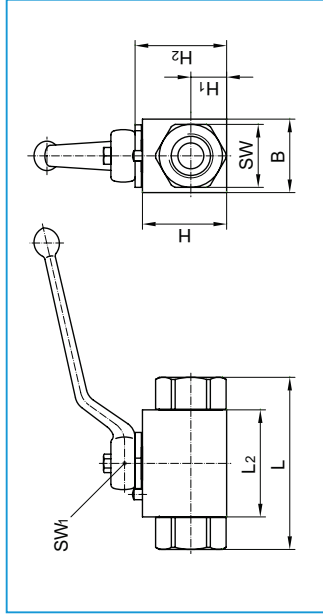


Handle included in delivery
Please check pressure rating of the pipe fittings!
For actuators and handles refer to "Attachments, accessories"
Custom orders on request
All dimensions subject to change without notice
Dimensions in mm | Weight in kg | Pressure in bar

Connection	DN	Thread D	OD	L	L ₁	L ₂	B	H	H ₁	H ₂	SW	SW ₁	Handle code	Weight	
For cut (clamp) ring tube fitting DIN 2353 light series ISO 8434-1	4	M 12 x 1.5	6	67	10	36	20	25	10.0	27.5	19	7	12	0.2	
	6	M 14 x 1.5	8	67	10	36	20	25	10.0	27.5	19	7	12	0.2	
	8	M 16 x 1.5	10	75	11	45	30	35	14.5	38.5	24	8	13	0.4	
	10	M 18 x 1.5	12	75	11	45	30	35	14.5	38.5	24	8	13	0.4	
	12	M 22 x 1.5	15	83	12	51	35	40	17.0	43.5	30	10	14	0.6	
	16	M 26 x 1.5	18	82	12	50	45	45	20.0	48.5	36	10	14	0.9	
	20	M 30 x 2	22	99	14	60	45	55	24.0	59.0	41	14	15	1.2	
	25	M 36 x 2	28	108	14	70	55	60	26.0	64.0	50	14	15	1.8	
	32/25	M 45 x 2	35	116	16	70	55	60	26.0	64.0	50	14	15	1.9	
	40/25	M 52 x 2	42	121	16	70	55	60	26.0	64.0	55	14	15	2.1	
For cut (clamp) ring tube fitting DIN 2353 heavy series ISO 8434-1	4	M 16 x 1.5	8	73	12	36	20	25	10.0	27.5	19	7	12	0.2	
	6	M 18 x 1.5	10	73	12	36	20	25	10.0	27.5	19	7	12	0.2	
	8	M 20 x 1.5	12	77	12	45	30	35	14.5	38.5	24	8	13	0.4	
	10	M 22 x 1.5	14	81	14	45	30	35	14.5	38.5	24	8	13	0.4	
	12	M 24 x 1.5	16	87	14	51	35	40	17.0	43.5	30	10	14	0.7	
	16	M 30 x 2	20	90	16	50	45	45	20.0	48.5	36	10	14	0.9	
	20	M 36 x 2	25	107	18	60	45	55	24.0	59.0	41	14	15	1.3	
	25	M 42 x 2	30	120	20	70	55	60	26.0	64.0	50	14	15	1.9	
	32/25	M 52 x 2	38	134	22	70	55	60	26.0	64.0	55	14	15	2.2	
	40/25	M 62 x 2	46	148	24	70	55	60	26.0	64.0	60	14	15	2.6	
BSP-female thread DIN EN ISO 228-1	4	G 1/8	-	71	12	36	20	25	10.0	27.5	19	7	12	0.2	
	6	G 1/4	-	71	12	36	20	25	10.0	27.5	19	7	12	0.2	
	10	G 3/8	-	73	14	45	30	35	14.5	38.5	24	8	13	0.4	
	12	G 1/2	-	82	15	51	35	40	17.0	43.5	30	10	14	0.7	
	16	G 5/8	-	88	18	50	45	45	20.0	48.5	36	10	14	1.0	
	20	G 3/4	-	93	18	60	45	55	24.0	59.0	41	14	15	1.3	
	25	G 1	-	115	18	70	55	60	26.0	64.0	50	14	15	2.0	
	32/25	G 1 1/4	-	134	20	70	55	60	26.0	64.0	50	14	15	2.1	
	40/25	G 1 1/2	-	139	22	70	55	60	28.0	64.0	55	14	15	2.2	
	40/25	G 1 1/2	-	139	22	70	55	60	28.0	64.0	55	14	15	2.2	
NPT-female thread ANSI/ASME B1.20.1-1983	4	1/8 - 27	NPT	-	69	6.9	36	20	25	10.0	27.5	19	7	12	0.2
	6	1/4 - 18	NPT	-	69	10.0	36	20	25	10.0	27.5	19	7	12	0.2
	10	3/8 - 18	NPT	-	73	10.3	45	30	35	14.5	38.5	24	8	13	0.4
	12	1/2 - 14	NPT	-	82	13.6	51	35	40	17.0	43.5	30	10	14	0.7
	20	3/4 - 14	NPT	-	93	14.1	60	45	55	24.0	59.0	41	14	15	1.3
	25	1 - 11 1/2	NPT	-	115	16.8	70	55	60	26.0	64.0	50	14	15	2.0
	32/25	1 1/4 - 11 1/2	NPT	-	131	17.3	70	55	60	26.0	64.0	50	14	15	2.1
	40/25	1 1/2 - 11 1/2	NPT	-	143	17.3	70	55	60	26.0	64.0	55	14	15	2.4
	40/25	1 1/2 - 11 1/2	NPT	-	143	17.3	70	55	60	26.0	64.0	55	14	15	2.4



Steel • DN 32 - DN 50

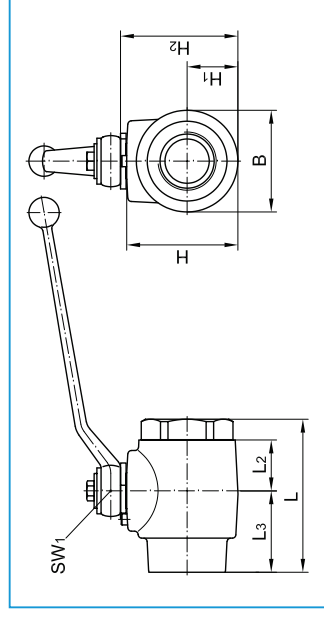

Handle included in delivery

Please check pressure rating of the pipe fittings!

For actuators and handles refer to "Attachments, accessories"

Custom orders on request

Custom orders on request

Dimensions in mm | Weight in kg | Pressure in bar

[illegible]