

5/2-way NAMUR control valve NM-521-H

Product description





5/2-way NAMUR control valve for driving double-acting actuators of types GTD, GCD and ETD. The valve will be supplied mounted at actuator, but it is also available as single component.

Technical data


Technical data	
Type	piston slide valve with differential piston (air spring)
Type of connection	flange according to NAMUR, at 2 and 4 G1/4", at 1, 3 and 5
Nominal width	7 mm
Operating pressure	1,5 to 10 bar
Temperature range	-20° to +70°C, explosion proofed -10° to +50° C
Protective system, - standard - explosion proofed	IP65 nach VDE 0470/EN 60529 with plug for cables Ø6–8mm; 0,75–1mm ² EEx m II T4 casted-on with cable, cable length 3,0 m, type: H052V2V-3G1
Operating time	100 %
Materials	casing: aluminium inner parts: brass, aluminium, synthetic seals: NBR (perbunan)
Manual override	standard
Standard voltages and power consumption	standard version: 230 V/AC: 5,0 [VA] 24 V/DC : 3,0 [W] explosion proofed version (EEx m II T4): 230 V/AC: 5,1 [VA] 24 V/DC : 5,0 [W]
Characteristic features	Fastening screws, code pin and seals belong to delivery range. Throttling of exhaust air possible at connection 3 and 5. Order designation for throttles types SDR and FDS see leaflet no. Z2-11e-...

Flange picture at actuator according to NAMUR recommendation



Drillings „S“ are provided for code thread pin that rises in a deepening of control valve.
The code pin ensures attitude controlled coordination of valve connections in case of exchange.


Mounting dimensions at standard versions

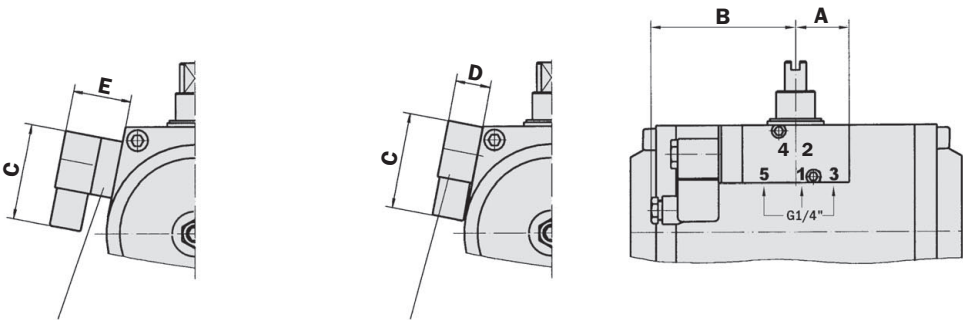

with NAMUR-valve adapter (VPN)
for actuator sizes 046 to 096

directly mounted
for actuator sizes 110 to 300

Mounting dimensions at explosion proofed version (Ex m II T4)

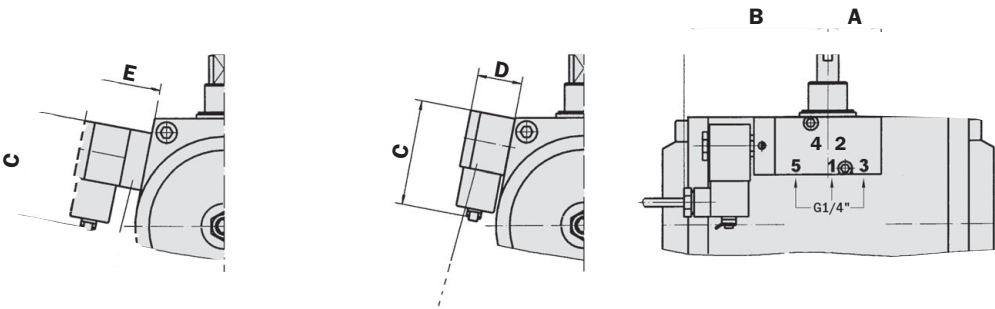


with NAMUR-valve adapter (VPN)
for actuator sizes 046 to 096

directly mounted
for actuator sizes 110 to 300

for actuator type	valva version	Brand	connection thread	DN	A	B	C	D	E
GTD/GCD/ETD 046 bis 300	standard	bar	1/4"	7	35	99	67	22	34
GTD/GCD/ETD 046 bis 300	explosion proofed	bar	1/4"	7	35	99	67	22	34

Standard mounting of valves

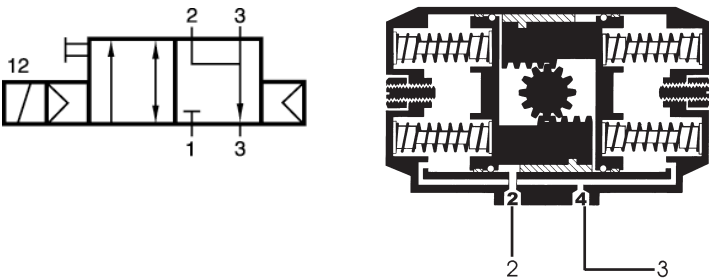

Information about mounting at actuators

Normally mounting is done as above and as shown in picture 1 and 2. (Drive in basic position, piston inwards.) A differing assembling has to be agreed on, especially at complete mounting on valves.

Versions

Standard version		one sided electrically actuated	
Designation	Brand	DN	Operating pressure [bar]
NM-521-H-230/AC	bar	7	1,5 to 10
NM-521-H-24/DC	bar	7	1,5 to 10
NM-521-H-XX/XX	bar	7	1,5 to 10

Explosionsschutz  (EEx = Explosionsschutz EEx m II T4)		one sided electrically actuated	
Designation	Brand	DN	Operating pressure [bar]
NM-521-H-230/AC-EEX	bar	7	1,5 to 10
NM-521-H-24/DC-EEX	bar	7	1,5 to 10
NM-521-H-XX/XX-EEX	bar	7	1,5 to 10

xx/xx = Special voltage, please indicate designation with voltage.	Other valve types on request.
Explosion proofed EEx ia II C T6 on request	

The descriptions and photographs contained in this product specification sheet are supplied by way of information only and are not binding.

Watts Industries reserves the right to carry out any technical and design improvements to its products without prior notice."

Warranty: All sales and contracts for sale are expressly conditioned on the buyer's assent to Watts terms and conditions found on its website at www.wattsindustries.com

Watts hereby objects to any term, different from or additional to Watts terms, contained in any buyer communication in any form, unless agreed to in a writing signed by an officer of Watts.

bar

A WATTS Brand

bar pneumatische Steuerungssysteme GmbH

Auf der Hohl 1 • 53547 Dattenberg • Germany

Tel. +49 (0) 2644 96070 • Fax +49 (0) 2644 960735

bar-info@wattswater.com • www.bar-gmbh.de