

Baby-LIN-3-Single

LIN-Bus simulation device with USB interface



Product description

The Baby-LIN-3-Single is part of the third generation of Baby-LINs introducing new and more powerful features.

All devices are powered by a 480MHz Cortex M7 core increasing the possible speed by 60% in comparison to the previous generation, allowing faster SDF execution and leaving reserves for new software features. To emphasize this performance leap the devices are also now equipped with a native high-speed (480MBit/s) USB connection and a USB-C connector, making it more convenient and reliable to use. We also further improve the usability of our devices by offering a male SUB-D9 connector for all bus signals, allowing the user to secure the connector to the device and giving more flexibility for upgrades from one device to another. Of course, we are upholding our compatibility guidelines for previous generations so all devices have still the established three pin plug for the LIN bus.

The power for the Baby-LIN-3-Single can be supplied either from the USB or the LIN-Bus side. If the device is powered by the LIN-Bus it can be operated without the need for a PC. All communication interfaces (LIN-Bus and USB) are galvanic isolated, eliminating interference between the PC and the board electronics.

The Baby-LIN-3-Single allows controlling LIN-Bus equipped devices by using a standard personal computer. After installation of the supplied **LINWorks** software, you can connect the Baby-LIN-3-Single to a free USB port, and access the LIN-Bus devices via LINWorks or custom programs by using the Baby-LIN-DLL.

Two red/green colored LEDs on the side show device information but can also be utilized by the user for other needs.

The device firmware is field updateable, so the changes of bus specification or upcoming new system features can be adapted easy.

The Baby-LIN-3-Single supports **SDF-V3** and is prepared for **SDF-V4**.

Operation mode

Any situation that requires communication with a LIN-Bus device is a potential field of application for a Baby-LIN-3-Single. It is a versatile tool that can be used in research laboratories, test departments and production (EOL applications).

- **Monitor** and log all frames on the bus without the need for a SDF. If a SDF is available signal values can also be monitored.
- **Control** the bus via the **LINWorks** software or customer specific applications by using the **Baby-LIN-DLL**.
- **Program** and store free programmable command sequences in the Baby-LIN-3-Single to run it as a **stand-alone** device without the need for a PC. Thus you can run a bus driven ECU in a **durability test** or **EOL applications** without any PC connected.

Simulation modes

The Baby-LIN-3-Single is able to simulate different configurations of LIN-Bus nodes. It is possible to **simulate any number of nodes** ranging from none to all. These are some typical configurations:

- Simulate the **LIN-Bus master** to operate slave nodes.
- Simulate any number of **LIN-Bus slave** nodes.
- Simulate **all nodes** and therefor the complete communication on the bus.
- Simulate all but one node and realize a **residual bus simulation**.
- Simulate no node to **monitor** the bus communication only.

LIN-Bus properties

The used LIN driver supports bus voltages of 8-26 VDC and can be used up to 115200 Baud. That way even nodes that operate outside the standard limits of the LIN specifications can be controlled with the Baby-LIN-3-Single. Supported LIN-versions are V.1.2 to V.2.2. The pull-up resistor of the LIN-Bus driver is internally switched to 1 kOhm, if the master node is emulated.

LINWorks suite

The purchase of a Baby-LIN-3-Single includes the license to download the **LINWorks** suite. This suite is a collection of PC software that supports you during the whole workflow.

The **LDFEdit** allows the inspection, creation and edit of a LDFFile (LIN Description File).

The **SessionConf** allows the inspection, creation and edit of a SDFFile (Session Description File) and features a file import for LDFFiles (for LIN-Bus simulation). It defines everything needed for a complete simulation of each available bus, e.g. which nodes on each bus are available and which nodes should be simulated by the Baby-LIN-3-Single. Moreover it allows defining an application logic. This programming ability is available for each device out of the box.


The **SimpleMenu** is used to establish a connection to the Baby-LIN-3-Single and upload SDFFiles, change the device target configuration, control the bus and monitor the frames and signals on the bus. Even without a LDFFile or SDFFile the bus can be monitored and the frames can be logged.

The **Baby-LIN-DLL** allows customers to create their own application and use all features of the Baby-LIN-3-Single like controlling and monitoring the LIN- and CAN-Bus interfaces. The **Baby-LIN-DLL** is a native **C/C++** DLL. It is available for **Windows**, **Linux** and **RaspberryPi**. Wrapper for **NET**, **Python**, **VB6** and **LabView** are available. Of course we provide examples

for all supported languages.

The **LogViewer** can show and convert the log files of the Baby-LIN-3-Single as well as the SimpleMenu.

The **LINWorks** software runs on 32 and 64 bit Windows 10 or higher versions.

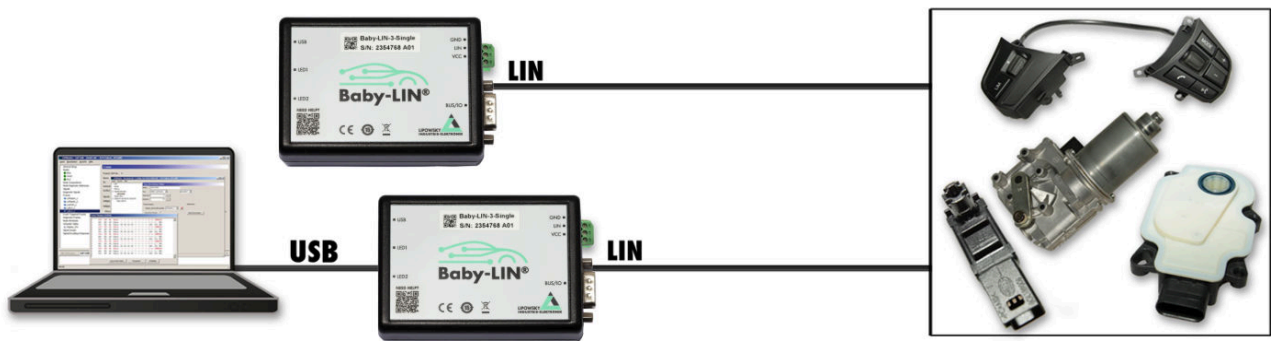

Technical Specifications

Device

- Power supply: 8-26 VDC
- Power supply via 3 pin connector (MC 1,5/ 3-ST-3,81) or male SUB-D9 connector
- Galvanic isolation of the communication interfaces and USB plug side
- CPU: ARM Cortex-M7, 480 MHz
- Memory: 1 MB RAM

Interface: USB Device

- USB 2.0 high-speed (480Mbit/s) interface
- Connection via USB-C plug

Interface: LIN

- 1 LIN-Bus interface available
- 1 Red/green LED (LED1) to show state of the LIN-Bus and the supply voltage

- LIN-Bus connection via 3 pin connector (MCVR 1,5/ 3-ST-3,81) or SUB-D9 connector
- LIN-Bus supply voltage: 8-26 VDC
- LIN-Bus baud rate: up to 115200 Baud (Support of protocols outside of the LIN specification)
- Supported LIN versions: V1.2, V1.3,...V2.2
- Supported LIN related protocols: Cooling and SAE J2602
- Maximum signal cable length for LIN-Bus: 30 m

Case:

- Degree of protection: IP20
- Operating temperature: -20° - +80° Celsius
- Weight: 90 g
- Case dimensions [mm]: 92 x 66 x 28 (L x W x H), external connectors not included.

Pin description



Pin	Signal	Description
1	n.c.	no connection, leave unconnected
2	n.c.	no connection, leave unconnected
3	n.c.	no connection, leave unconnected
4	1.LIN	First LIN-Bus
5	n.c.	no connection, leave unconnected
6	GND	Common ground
7	n.c.	no connection, leave unconnected
8	1.LIN	First LIN-Bus
9	VCC	Supply input for the device

Dimension drawing



**Information**

The complete technical specifications can be found in our user manual. It contains among other details the following:

- Connector pin assignment
- Electrical characteristics
- Firmware description
- Software description
- Protocol information
- Migration information

The user manual can be found in our LINWorks download package: <https://lipowsky.de/downloads>

Hardware requirements

The following hardware is required to operate the Baby-LIN-3-Single :

Requirement	Purpose
A PC with about 200 MB free hard drive space	Required for the installation of the LINWorks software. Please check the software requirements and use cases.
A free USB port	Required to transfer SDFiles to the Baby-LIN-3-Single and for firmware updates.

Software requirements

The LINWorks software requires one of the following operating systems:

- Windows 10 (32 and 64 Bit)
- Windows 11 (x86 and 64 Bit)

**Version incompatibility**

The Baby-LIN-DLL is available for Linux. The exact requirements are available upon request.

Some additional tools available in the LINWorks software suite require an installed .NET Framework v4.0. To install LINWorks components administration privileges are required.

LINWorks workflow

Baby-LIN Workflow


LDF-Editor

Session
Configurator

SimpleMenu
FrameBlaster
CustomPanel

Baby-LIN-DLL

Custom
Application

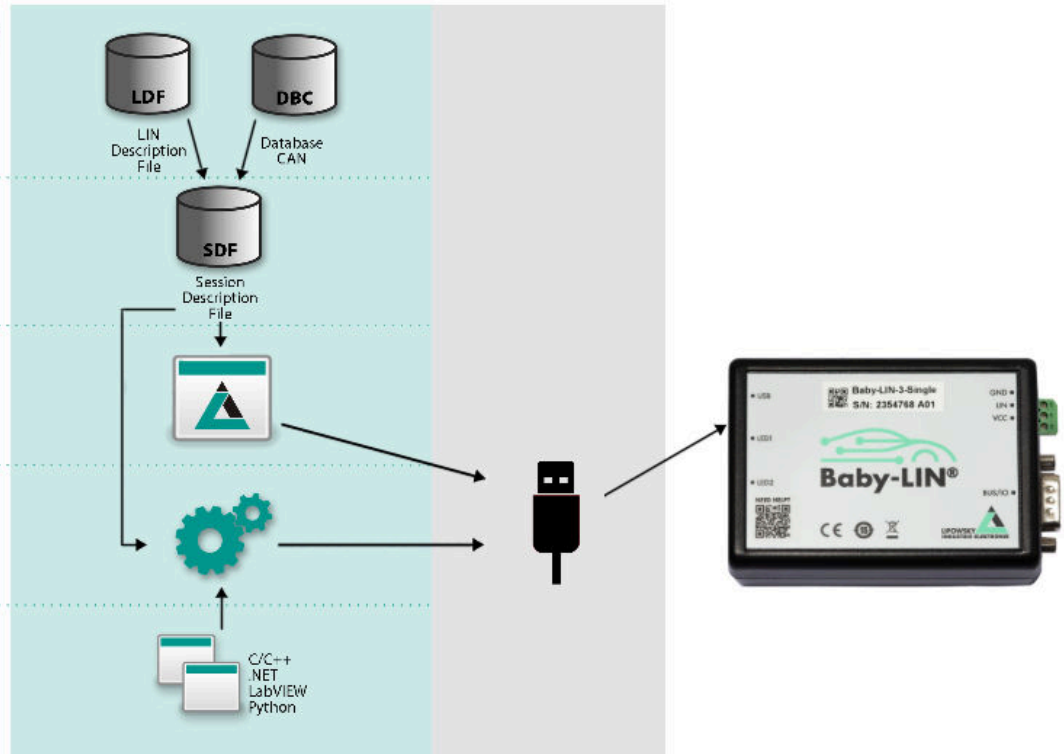

Scope of delivery

The delivery of a Baby-LIN-3-Single systems includes the following components:

- Baby-LIN-3-Single device
- USB-C 2.0 cable, 1m, Type A to type C
- One 3-pin plug with screw connection (MC 1,5/3-ST-3,81)
- One SUB-D9 female plug with solder cups
- Download license for the LINWorks Suite (includes LINWorks PC software, USB-driver, example files and documentations)

Ordering information

Item number	Item	Description
8001022	Baby-LIN-3-Single	LIN-Bus simulation device with USB interface



Information

Each device includes a download license for the LINWorks application suite. This PC software can be downloaded here:

<https://lipowsky.de/downloads>



Tip

Country of origin: Germany

Customs tariff number: 90308900

Optional hardware components

Item number	Item	Description
3500720	USB 2.0 cable, 1m Type A to type C	This cable connects the Baby-LIN-3 to a PC.
3021303	MC1,5/3-ST-3,81	3-pin plug component, screw connection with tension sleeve. Cable outlet parallel to plugin direction. Screw direction vertical to plugin direction.
3040330	Female SUB-D9 plug	SUB-D9 female plug with solder cups to connector the male SUB-D9 plug of the Baby-LIN-3.

Optional voucher codes

Item number	Item	Description
8002150	Option BL-Security-Access-Gateway	License code for the Security Access Gateway Application to connect Security DLL's to SDF executed on a Baby-LIN-3-Single .
8000891	Option BL-Webasto KLine	License code for software activation of special function of Webasto K-Line Protocol, need a written approval of Webasto.



Information

All voucher codes can be converted using the option shop: www.optionshop.de/lipowsky

Optional software components

Item number	Item	Description
9004210	Customer specific installation	Installation of customer specific SDF file version and/or installation of license activation key.
9103010	LINWorks CD	The LINWorks archive with PC software for all Baby-LIN products on a physical medium (CD).

Distributors

Area	Country	Distributor	Website	Phone	E-Mail
Asia		Hongke Technology Co. LTD	www.hkaco.com	+86 20 3874 4538	sales@hkaco.com
		Honghong Technology Co., Ltd.	www.hongtronics.com	+886-2-85015332	sales@hongtronics.com
		Kyoko Co.,Ltd.	www.kyokotec.com		sales@kyokotec.com
		HAE HONG Co.,Ltd.	www.haehongtec.com	+82 010-2601-9622	sales@haehongtec.com
		Microport Computer Electronics Inc.	www.microport.com.tw	+886 6 330 3000	inquiry.microport@gmail.com
	 	KMDATA Inc.	www.kmd.co.kr	+82 2 3281 0333	daniel@kmd.co.kr
		ITHandel Inc.	www.ithandel.modoo.at	+82 10 4616 7079	ithandel01@naver.com
		Abex-Global	www.abexengineering.com	+91 20 67440038	info@abexengineering.com
America	 	FEV North America Inc.	www.fev.com	+1 248 724 2830	marketing_fev@fev.com
		Círculo SEI S.A. de C.V.	www.circulo-sei.com	+52 473 1030459	sales@circulo-sei.com
		Círculo SEI North America LLC	www.circulo-sei.com		sales-usa@circulo-sei.com
Europe		ISIT	www.isit.fr	+33 561 306 900	contact@isit.fr
	  	The Debug Store	www.thedebugstore.com	+44 1490 430526	sales@TheDebugStore.com
Worldwide		Lipowsky Industrie-Elektronik GmbH	www.lipowsky.com	+49 6151 935910	info@lipowsky.de

More details about our distributors can be found on our website under the heading [Distributors](#).

Product disposal



After the product is no longer used, it must be disposed of separately from household waste at a designated recycling site. All kind of batteries must be removed from the device and disposed separately. Furthermore, you can also return the device to us for proper disposal, you only have to bear for the shipping costs. Please use this address:

Lipowsky Industrie-Elektronik GmbH
Device disposal
Römerstr. 57
64291 Darmstadt
Germany

Version history

Version	Change	Chapter	Details
1.1	Initial Version		
1.2	Added Abex-Global as distributor	Distributors	