





DO3 Valves




Specifications

Spool Configuration	Graphic Symbol	Description	Max. Flow GPM	Max. Pressure PSI
CC3		4W3P Closed Center	25 GPM	5000 PSI
CO3		4W3P Open Center	12.5 GPM	5000 PSI
CM3		4W3P Motor Spool	15 GPM	5000 PSI
CT3		4W3P Tandem Center	12.5 GPM	3500 PSI

Acceptable back pressure - 1500 PSI (100 bar)
Volts/Current 110 VAC/2.2, 220 VAC/1.4, 12 VDC/2.5, 24 VDC/ 1.25
Indicating light are standard
Weight: 4 lbs. (1.8 Kg)


Ordering Codes

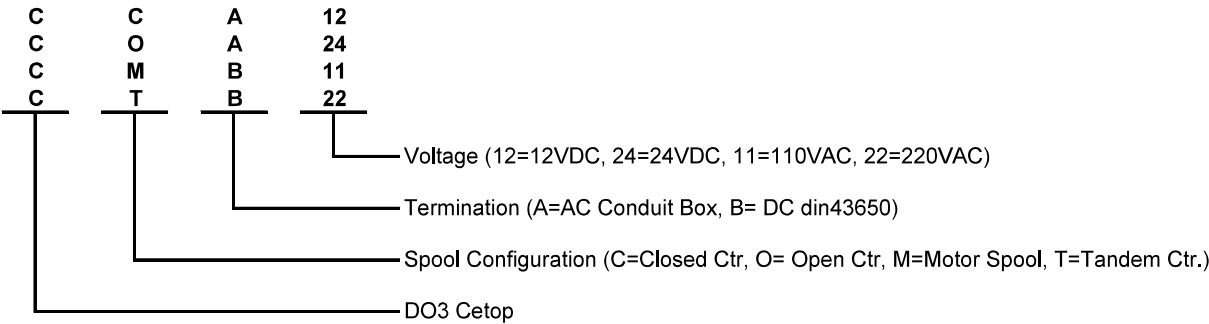

WARNING: The specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.




Drawings

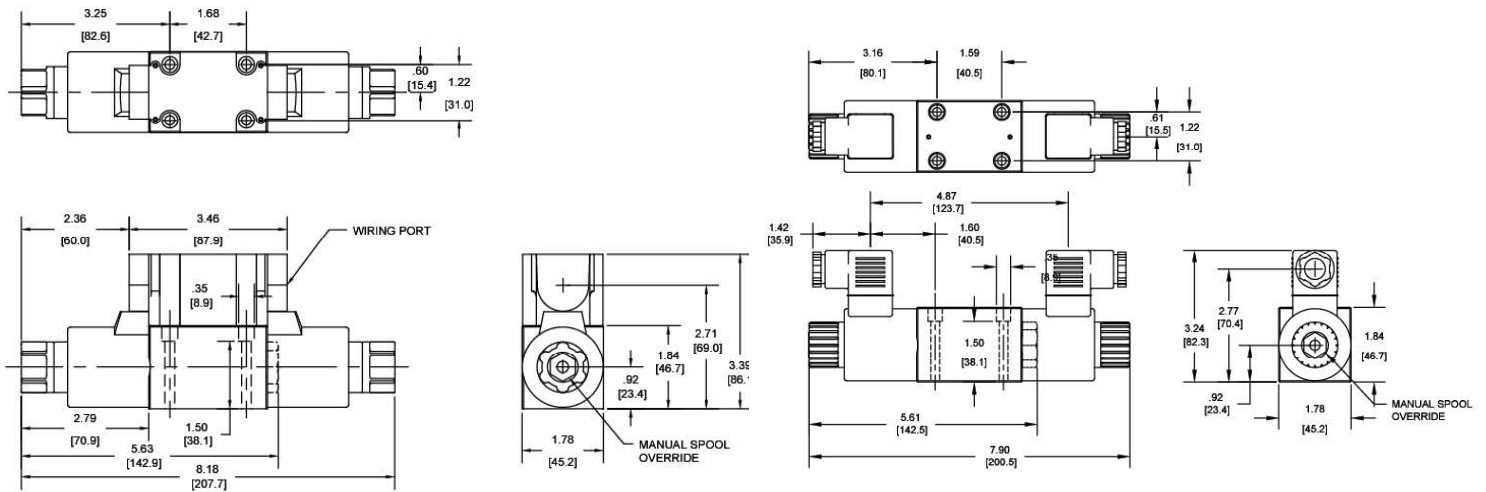

Performance Data

Pressure Drop Characteristics

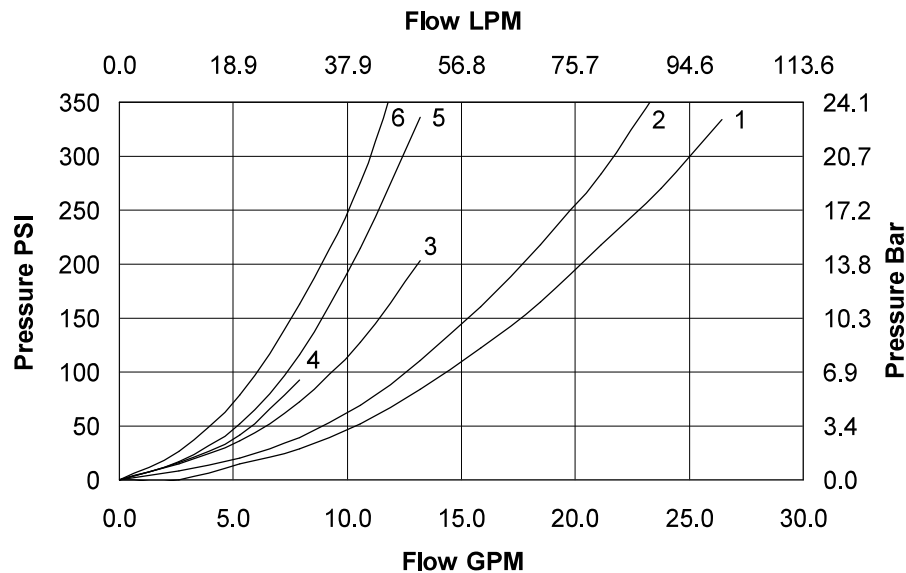

ABOVE CURVE IS WITH HYDRAULIC OIL 150 SSU AT 100° F.

Model	Valve Spool Type	P → A	P → B	A → T	B → T	P → T
CO3XXX	Open Center	1	1	1	1	1
CC3XXX	Closed Center	2	2	2	2	-
CM3XXX	Motor Spool	2	2	1	2	-
CT3XXX	Tandem Center	6	6	5	5	3

WARNING: The specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.