



12.1.3. Housing Dimensions

BDIF Sheet Metal Thickness Sensor
cylindrical, threaded

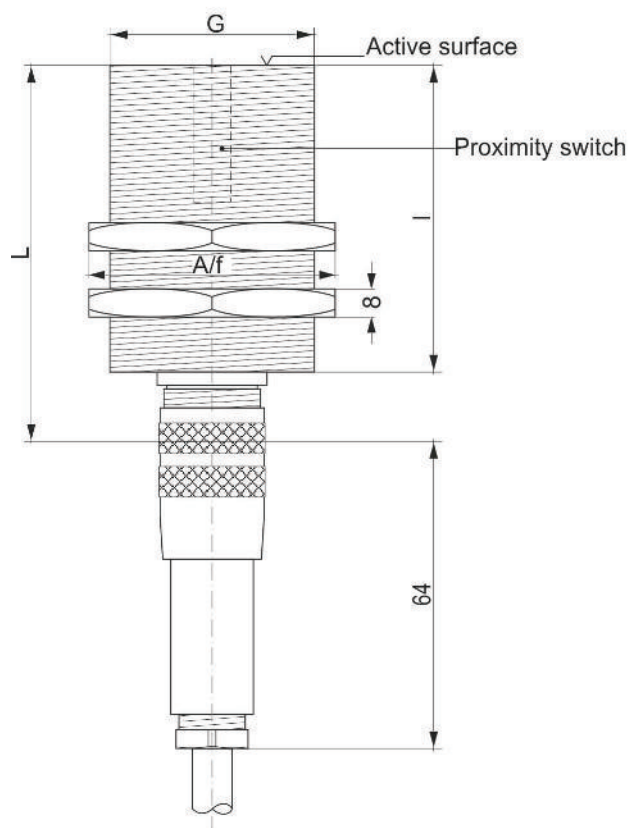


BDIF Sheet Metal Thickness Sensor
cylindrical, threaded

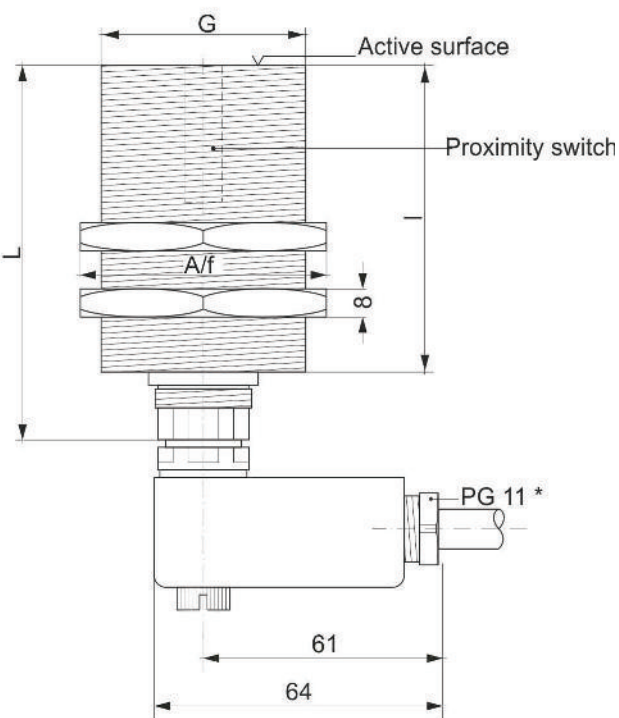


* PG 11 = armoured conduit

Socket connection



BVLG7/X-3
Connecting lead with straight socket
Ref. no. 20.18-03
Lead length X = max. 25 m

Socket connection



BVLG7/X-2
Connecting lead with angle lead box
Ref. No. 20.18-02
Lead length X = max. 25 m

Type	Ref. no.	Meas. range mm	Max. thickn. mm	Meas. time ms	L mm	I mm	G thread	A/f	Weight g
BDIF-m36rg-3s	13.05-60	0.2 ... 2	1.5	< 20	90	65	M 36 x 1.5	55	380
BDIF-m42rg-4s	13.05-61	0.2 ... 3	2.5	< 30	100	75	M 42 x 1.5	65	650
BDIF-m54rg-3s	13.05-63	0.2 ... 4	3.5	< 50	107	81	M 54 x 0.75	65	1200
BDIF-m75rg-2s	13.05-64	0.2 ... 6	5.5	< 110	126	100	M 75 x 1.5	90	3010