TTUH
Food Equipment Water Applications


- **Bottom Mounted**
- **Brass Flange**
- **Copper Sheath Elements**
- **1 - 12 kW**
- **120, 208, 240 and 480 Volt, 1 & 3 Phase**
- **Without Integral Thermal Cutout**
- **High Watt Densities (see Table)**

Applications

- Steam Tables
- Kettles
- Humidifiers


"Under the U.S. Federal Safe Drinking Water Act, it is unlawful to install or use this product in any service that comes into contact with water for human consumption (including drinking, food or beverage preparation, hand washing, or teeth brushing). This product is intended exclusively for use in non-potable service."

Dimensions (Inches)

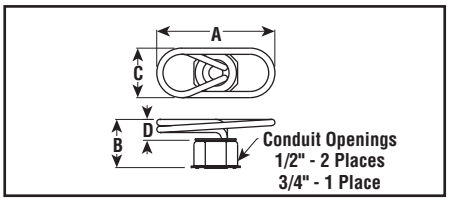




Dimensions (Inches)

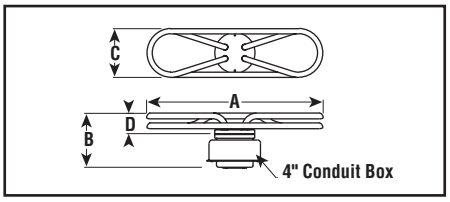



Dimensions (Inches)

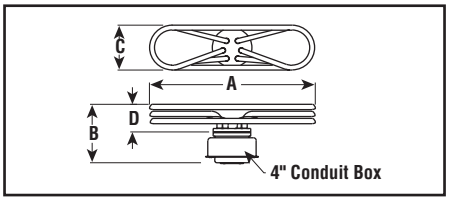



Specifications and Ordering Information

kW	Volts	W/In²	Dimensions (In.) A	B	C	D	Model	Stock	PCN	Wt. (Lbs.)	No. Elements
1 Phase w/o Cutout — 2" Min. Liquid Depth											
1	120	42	6-3/4	4-9/16	4-1/4	2-5/16	TTUH-10A	NS	272321	3	1
1.5	120	57	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-15A**	**S**	**272330**	3	1
1.5	208	57	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-15A**	**S**	**272348**	3	1
1.5	240	57	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-15A**	**S**	**272356**	3	1
2	120	57	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-20A**	**S**	**272364**	3	1
2	208	57	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-20A**	**S**	**272372**	3	1
2	240	57	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-20A**	**S**	**272380**	3	1
2.5	120	58	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-25A**	**S**	**272399**	3	1
2.5	208	58	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-25A**	**S**	**272401**	3	1
2.5	240	58	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-25A**	**S**	**272410**	3	1
3	120	55	6-3/4	4-9/16	4-1/4	2-5/16	TTUH-30A	NS	272428	3	1
3	208	55	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-30A**	**S**	**272436**	3	1
3	240	55	6-3/4	4-9/16	4-1/4	2-5/16	**TTUH-30A**	**S**	**272444**	3	1
4	120	53	9-1/2	4-9/16	4	1-3/8	**TTUH-40A**	**S**	**272452**	3	1
4	208	53	9-1/2	4-9/16	4	1-3/8	**TTUH-40A**	**S**	**272460**	3	1
4	240	53	9-1/2	4-9/16	4	1-3/8	**TTUH-40A**	**S**	**272479**	3	1
5	208	39	12-3/4	4-9/16	4	1-11/16	**TTUH-50**	**S**	**192583**	5	2
5	240	39	12-3/4	4-9/16	4	1-11/16	**TTUH-50**	**S**	**192591**	5	2
6	208	42	14-1/2	4-9/16	4	1-11/16	**TTUH-60**	**S**	**192604**	6	2
6	240	42	14-1/2	4-9/16	4	1-11/16	**TTUH-60**	**S**	**192612**	6	2
7	208	49	14-1/2	4-9/16	4	1-11/16	TTUH-70	NS	192620	6	2
7	240	49	14-1/2	4-9/16	4	1-11/16	**TTUH-70**	**S**	**192639**	6	2
3 Phase w/o Cutout — 3" Min. Liquid Depth											
3	208	55	8-3/4	4-5/8	3-1/8	1-15/16	**TTUH-303**	**S**	**255943**	4	3
3	240	55	8-3/4	4-5/8	3-1/8	1-15/16	TTUH-303	NS	255951	4	3
4	208	74	8-3/4	4-5/8	3-1/8	1-15/16	**TTUH-403**	**S**	**255960**	4	3
4	240	74	8-3/4	4-5/8	3-1/8	1-15/16	**TTUH-403**	**S**	**255978**	4	3
4	480	74	8-3/4	4-5/8	3-1/8	1-15/16	TTUH-403	NS	258511	4	3
5	208	73	11	4-5/8	3-1/8	1-15/16	**TTUH-503**	**S**	**255986**	5	3
5	240	73	11	4-5/8	3-1/8	1-15/16	**TTUH-503**	**S**	**255994**	5	3
6	208	67	11-1/16	5	4-1/16	2-3/8	TTUH-603	NS	256006	5	3
6	240	67	11-1/16	5	4-1/16	2-3/8	**TTUH-603**	**S**	**256014**	5	3
6	480	67	11-1/16	5	4-1/16	2-3/8	TTUH-603	NS	258520	5	3
7	208	78	11-1/16	5	4-1/16	2-3/8	**TTUH-703**	**S**	**256022**	5	3
7	240	78	11-1/16	5	4-1/16	2-3/8	**TTUH-703**	**S**	**256030**	5	3
8	208	69	11-1/8	5	4-1/16	2-3/8	**TTUH-803**	**S**	**258423**	5	3
8	240	69	11-1/8	5	4-1/16	2-3/8	TTUH-803	NS	258431	5	3
12	240	98	17-3/4	5	4-1/16	2-3/8	TTUH-1203	NS	186052	6	3

Stock Status: S = stock NS = non-stock
To Order—Specify model, PCN, kW, volts, phase and quantity.