


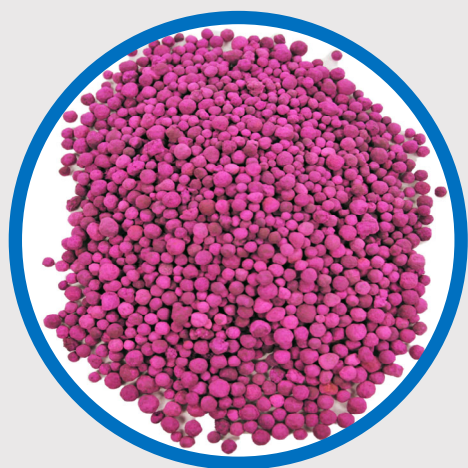

RSE 8

DESCRIPTION

RSE 8 media consists of porous activated alumina spheres that have been impregnated with a minimum of 8% potassium permanganate. RSE 8 reduces corrosion caused by acidic gasses via an oxidation reaction to inactive solids.

CONTACT

PHONE:
586-725-0192

WEBSITE:
RSEincorporated.com

EMAIL:
Info@RSEincorporated.com

ADDRESS

RSE Incorporated
51529 Birch St
New Baltimore MI 48047

SPECIFICATIONS

Shape		Spherical
Size	mm	3.8
Bulk Density	lb/ft ³	49.94 (+/-5%)
Moisture content (approx.)	%	20
Crush strength (min.)	lb	4.4
Potassium Permanganate (by weight)	%	8
Compliance with UL classification	Class	1

REMOVAL CAPACITY

Hydrogen Sulfide (H ₂ S)	%	14
Sulfur Dioxide (SO ₂)	%	7
Nitrogen Dioxide (NO ₂)	%	21
Nitric Oxide (NO)	%	5
Formaldehyde	%	3

APPLICATION GUIDELINES

Typical air velocity	ft/s	0.9-8.2
Relative air humidity	%	10-95
Temperature	F	4-125
Performance	%	99.5

RECOMMENDED FOR

- Hydrogen sulfide
- Sulfur dioxide
- Oxides of sulfur
- Nitrogen oxides
- Formaldehyde
- Mercaptans
- Low molecular weight organic acids