


PART NUMBER	PART SIZE PER SET	RATED AIR FLOW CFM	RESISTANCE W.G	MEDIA TYP	MEDIA WEIGHT PER SET
99-0012PH-3-04-11-12	11 ⁵ / ₈ X 23 ¹ / ₂ X 11 ¹¹ / ₁₆	500	.72	60CTC PELLET	28LBS +/-5%
99-0012PH-3-04-11-22	11 ⁵ / ₈ X 23 ¹ / ₂ X 11 ¹¹ / ₁₆	500	.72	⁵⁰ / ₅₀ BLEND PELLET/POTASSIUM	38LBS +/-5%
99-0012PH-3-04-11-21	11 ⁵ / ₈ X 23 ¹ / ₂ X 11 ¹¹ / ₁₆	500	.72	4% POTASSIUM	48LBS +/-5%
99-0012PH-3-04-11-08	11 ⁵ / ₈ X 23 ¹ / ₂ X 11 ¹¹ / ₁₆	500	.72	KOH IMPREG.	30LBS +/-5%
99-0012PH-3-04-11-24	11 ⁵ / ₈ X 23 ¹ / ₂ X 11 ¹¹ / ₁₆	500	.72	⁵⁰ / ₅₀ BLEND PELLET/POTASSIUM 8%	40LBS +/-5%
99-0012PH-3-04-11-36	11 ⁵ / ₈ X 23 ¹ / ₂ X 11 ¹¹ / ₁₆	500	.72	RSE15	48LBS +/-5%
99-0012PH-3-04-11-23	11 ⁵ / ₈ X 23 ¹ / ₂ X 11 ¹¹ / ₁₆	500	.72	8% potassium	50LBS +/-5%

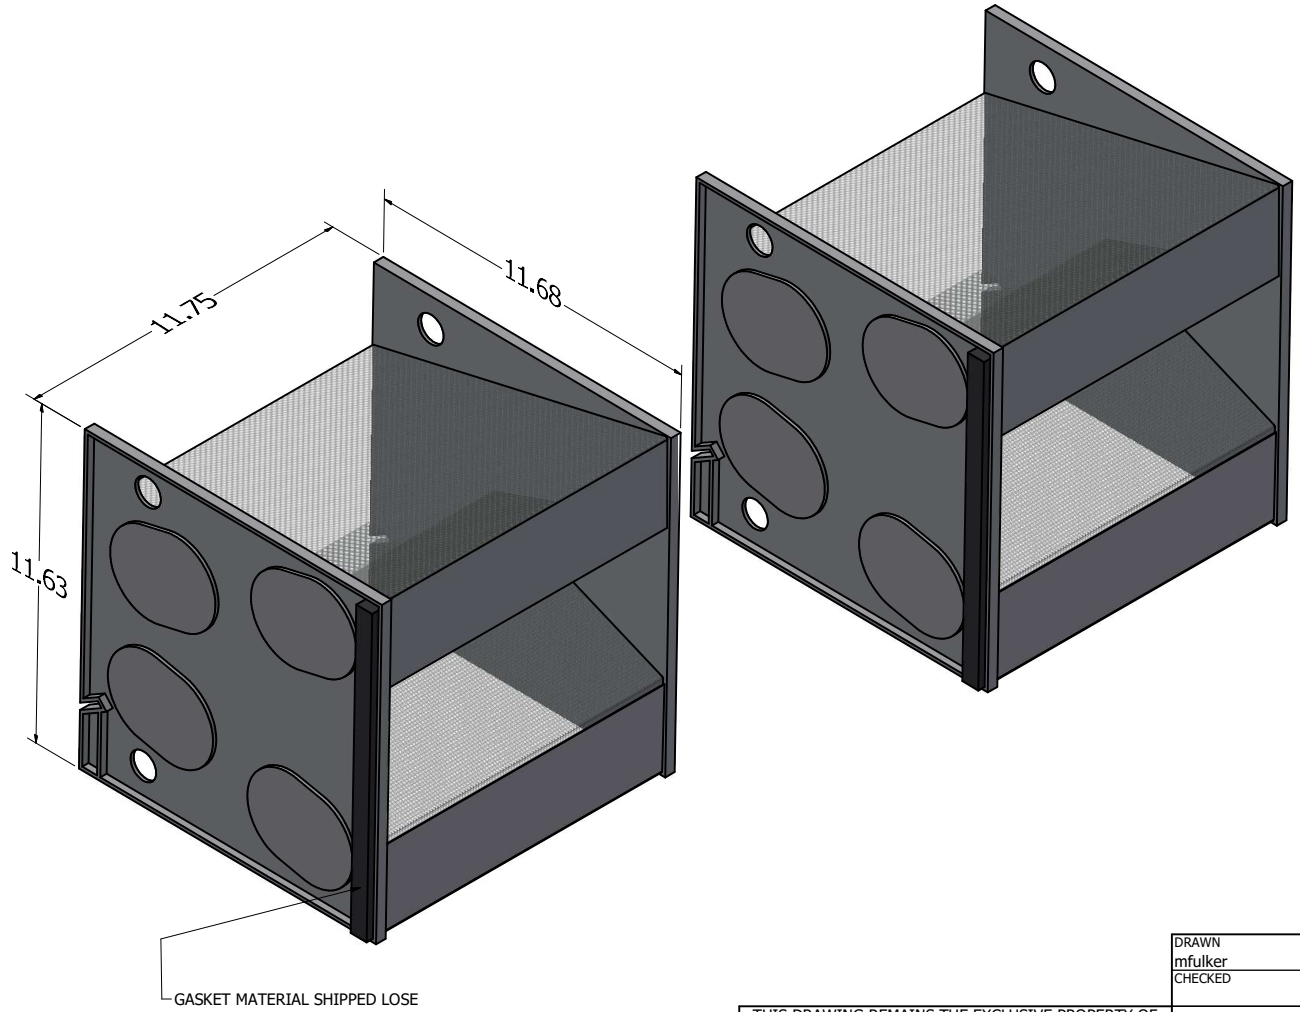

NOTE: MODEL SHOWN: ONE SET

SPECIFICATIONS

MADE FROM HIGH IMPACT POLYSTYRENE PLASTIC

.085 X .500 SLOTTED PERF

NON REMOVABLE PLUGS

MODULE IS INCINERABLE

MODULES SOLD IN SETS OF TWO

PRESSURE DROP
(4-MODULE SYSTEM)
1.6 @ 250FPM

ALL MEDIA WEIGHT IS +/- 5%

SOME MEDIA WILL HAVE OFF DUSTING ON START UP
RECOMMENDED TO HAVE DOWN STREAM DUSTING FILTER
IN SYSTEM

SIDE ACCESS LOAD SYSTEMS
MODULES ARE RECOMMENDED TO HAVE FOAM ON SIDE
FOR PROPER SEAL

RSE INCORPORATED RESERVES THE RIGHT TO MODIFY THE DESIGN FOR IMPROVED PRODUCT PERFORMANCE

THIS DRAWING REMAINS THE EXCLUSIVE PROPERTY OF RSE INCORPORATED ALL AUTHORIZED COPIES ARE LOAN IN GOOD FAITH ANY FURTHER REPRODUCTION WITH OUT THE CONSENT OF RSE INCORPORATED IS THEREBY PROHIBITED

DRAWN mfulker	2/22/2024	<i>RSE INCORPORATED</i>			
CHECKED		TITLE RSE 12PH			
		SIZE C	DWG NO RSE 12PH REV B	REV	
TOLERANCE:	+/- 1/16				
SQUARNESS	+/- 1/16	SCALE		SHEET 1 OF 1	