
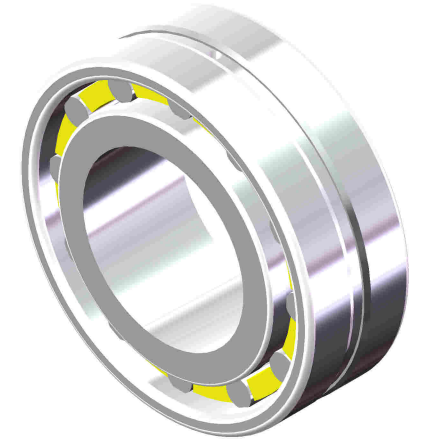


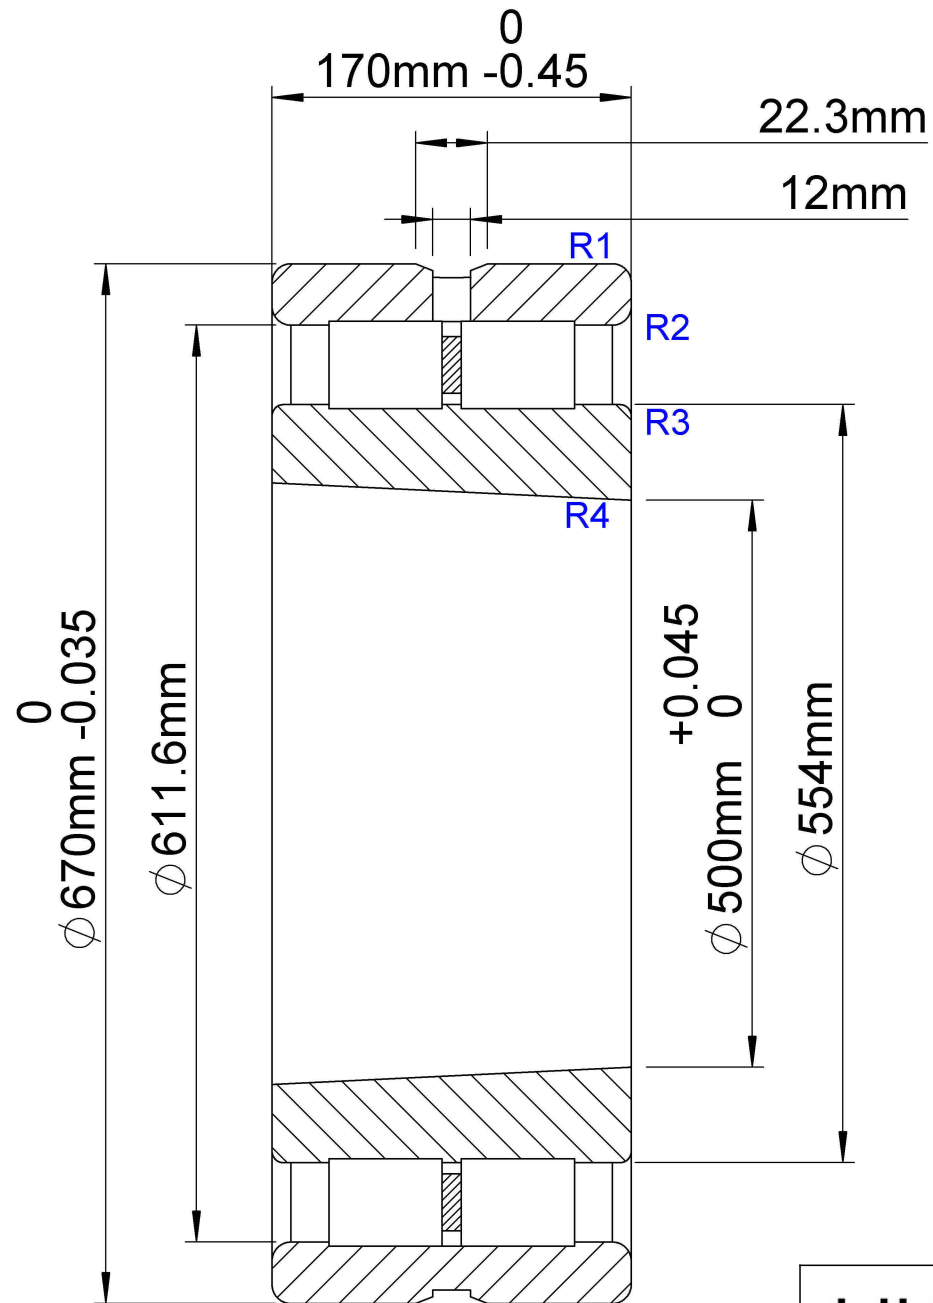

R1.R2:MIN 5mm

R3.R4:MIN 3mm

Permissible Axial Displacement(max.):3.5mm

LILY[®]

SHANGHAI LILY BEARING LIMITED

Email: lilybearing@lily-bearing.com

Part
Number

NNU 49/500 BK/SPW33X

Double Row Super-Precision Cylindrical Roller Bearings