


EM-25-20-N (IMI Bimba)

Additional accesories: (MN-3)(RN-4)

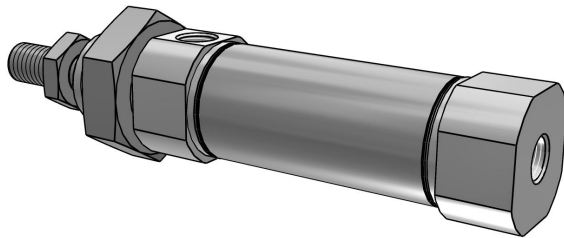

Long, Reliable Life - 304 stainless steel body with mirror finish ID.

Maintenance-Free Performance - Pre-lubrication with HT-99, our special oil compound.

Added Strength -

- High strength specially machined end caps.
- Piston to rod connection is threaded, sealed, and riveted securely in place.
- Roll formed rod threads on both ends.
- Aluminum alloy piston with blow-by flats.





Low Breakaway Frictional Characteristics -

- Rapid design and delivery time for custom modifications.
- Worldwide availability through local stocking distributors.

Bimba's ISO Cylinders are designed to be easily interchangeable throughout the world, conforming to ISO 6431/6432 Standard Specifications. Bimba PCE air cylinders have a stainless steel body, rod, and Delrin® plastic end caps. This combination of materials makes them ideal for applications where exposure to moisture, lubricants, and specific solvents is required.

IMI Industrial Automation
University Park, IL 60484
Telephone: 708.534.8544
Email: cs@bimba.com
www.bimba.com

Leaders in Actuation.

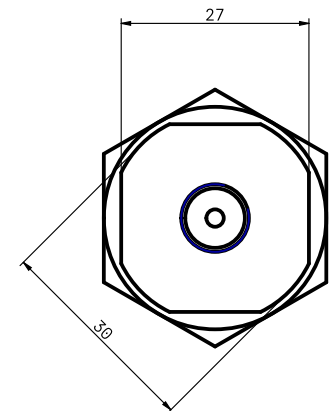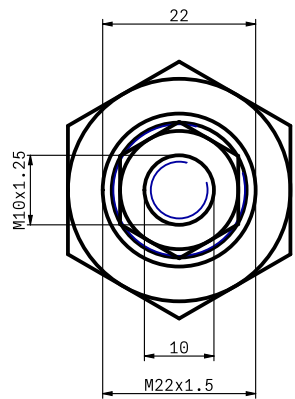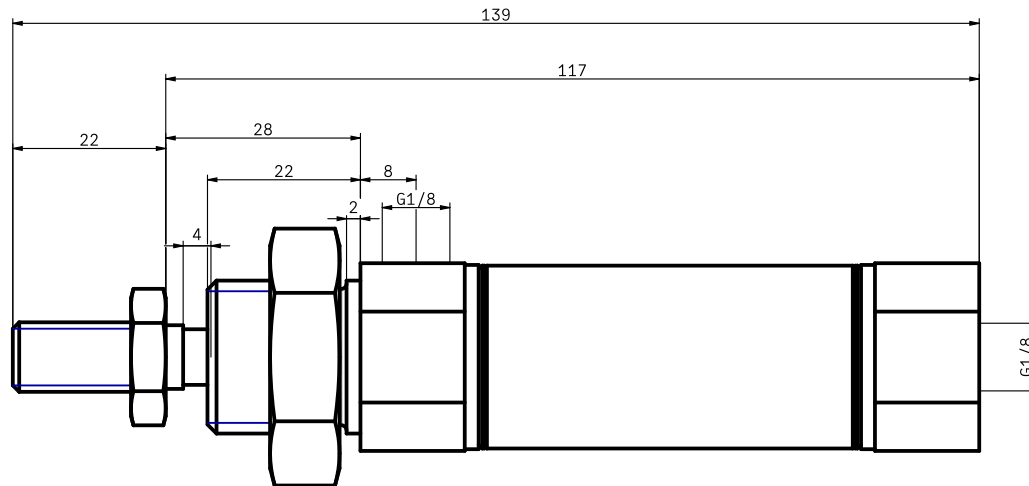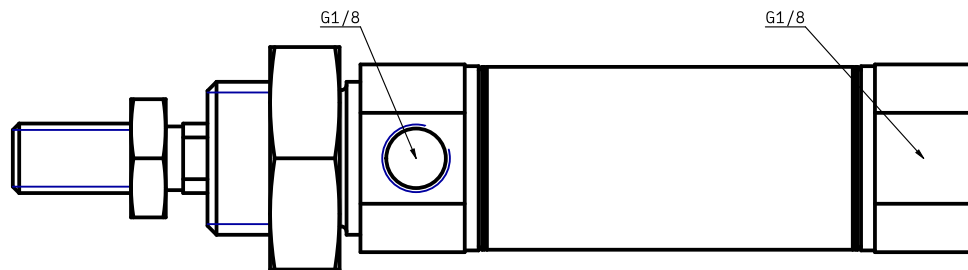

EM-25-20-N (IMI Bimba) (MN-3)(RN-4)

THIS DRAWING CONTAINS PROPRIETARY DESIGNS AND/OR INFORMATION OF IMI Bimba MFG. CO. OR ITS SUBSIDIARIES AND IS NOT TO BE TRANSMITTED, REPRODUCED, USED OR DISCLOSED WITHOUT WRITTEN PERMISSION OF IMI Bimba MFG. CO. OR ITS SUBSIDIARIES. DESIGN REFLECTS OUR BEST ENGINEERING OPINION BASED ON WRITTEN APPLICATION SPECIFICATIONS RECEIVED. SUITABILITY OF A DESIGN FOR AN APPLICATION REQUIRES ANALYSIS AND/OR TESTS IN YOUR SPECIFIC SYSTEM.



IMI Industrial Automation

University Park, IL 60484
(800) 442-4622 www.bimba.com

PROPRIETARY DRAWING - Reference Only