


Trojan Type 'J' version 'FS' 10138 Data Sheet



- Air to Hydraulic ratio 11:1.
- Volume output flow rate up to 7 litres/minute.
- Output per cycle approximately 19 cc
- Stainless steel wetted parts.
- Suitable for pumping water, oil and a wide range of fluids.
- Automatic stall against a closed outlet with no air consumption, automatic re-start.
- Powered by any fixed or portable compressed air or Nitrogen source up to 8 bar (116 psi).
- Infinitely variable capacity and discharge pressure by simple regulation of air supply.

- ATEX  II 2G Ex h IIC T5 Gb
II 2D Ex h IIC T100°C Db

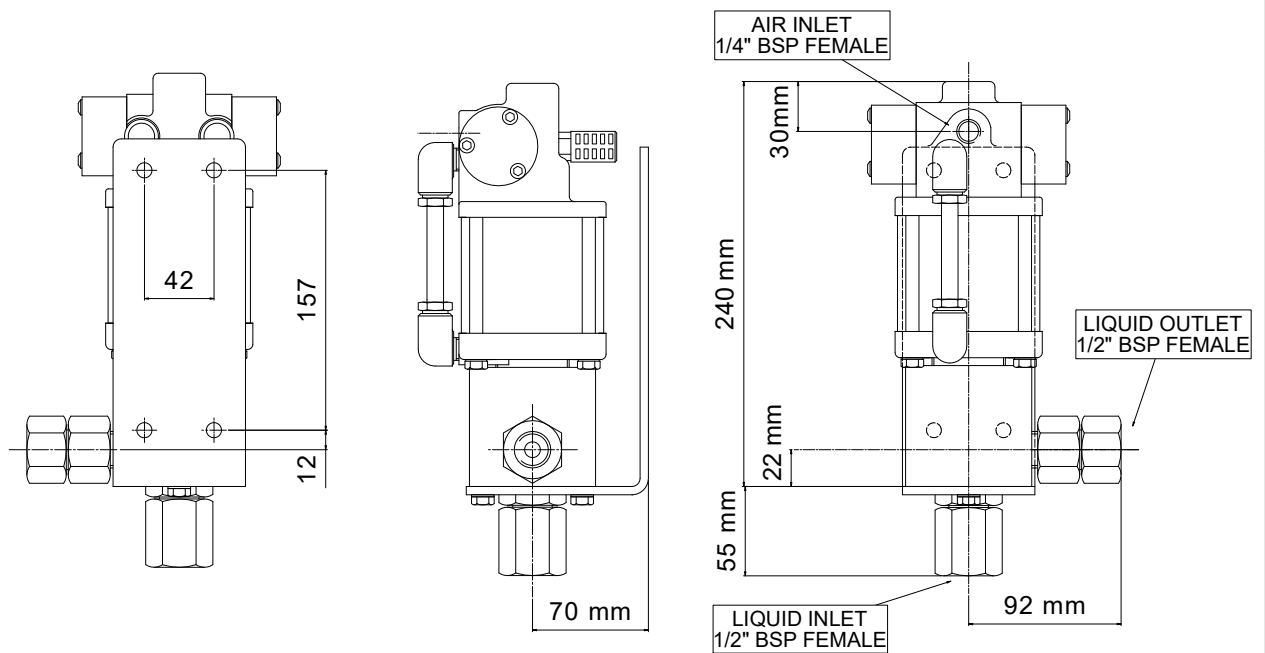

The **Trojan** Type 'J' Ratio 11:1, Version 'FS'

APPROXIMATE DIMENSIONS

FIRST ANGLE
PROJECTION

DRG No:
10138

Pumps and spares are available from:-

Hydraulic Pneumatic Services Ltd,

Unit 17, King Street Trading Estate

Middlewich

Cheshire UK

CW10 9LF Tel: +44 (0)1606 835725

www.trojanpumps.com

Email: enquiries@pressure-pumps.co.uk