



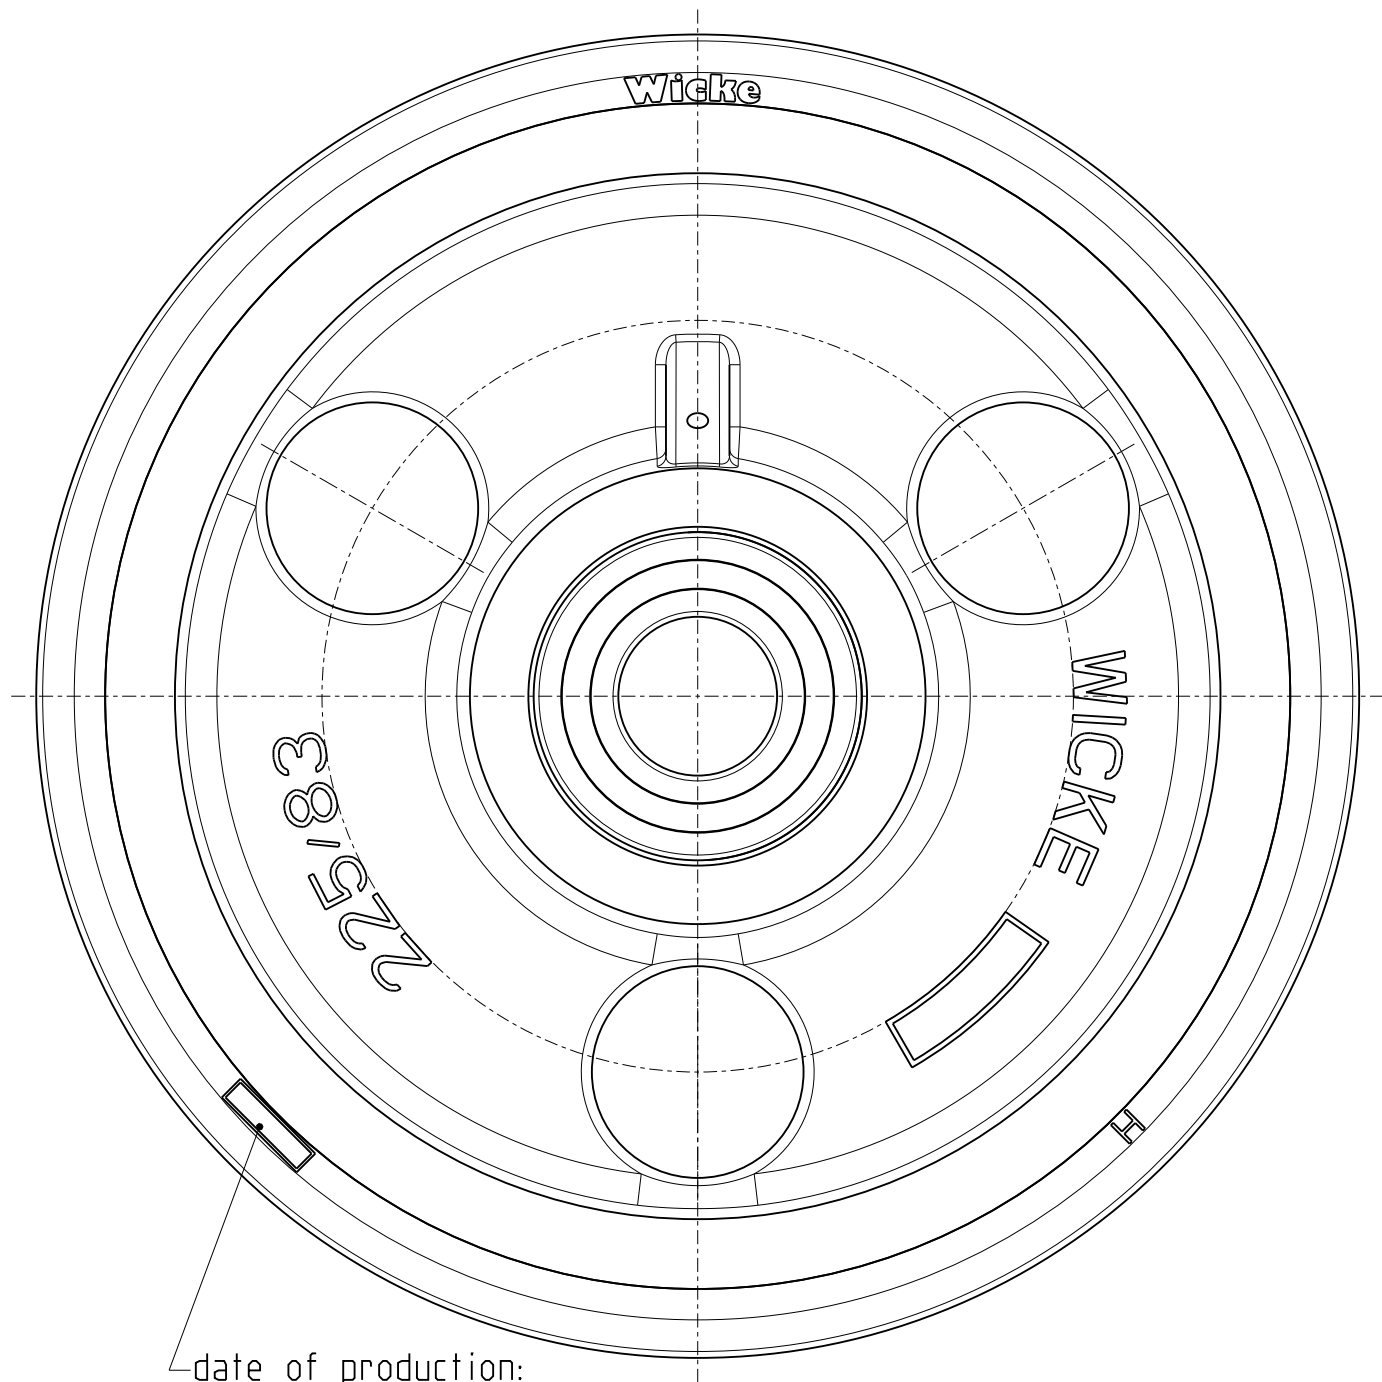

3:10

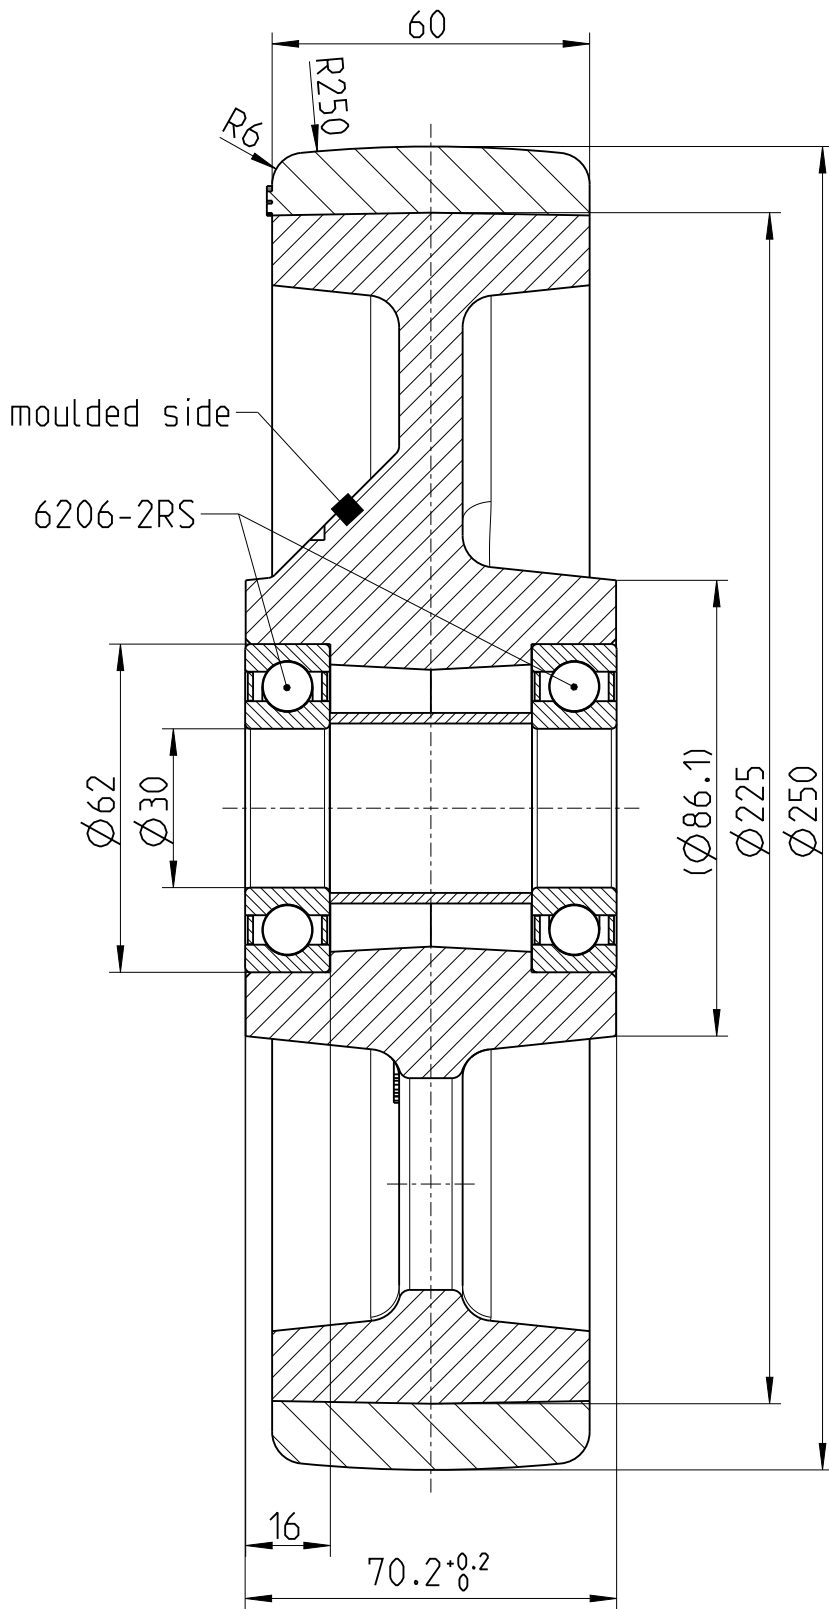

RAL 9005 Jet black

tyre with hydrolysis protection

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.				accept. tolerances		surface EN ISO 1302		scale 7:10		weight 8.987 kg								
								material tyre: NDIIthane® 92 Shore A rim: EN-GJL-HB215										
					date	signatures		title				Unit:						
					drawn by	03.03.26	Puley		wheel VG 250/ 60/6K-S				D ☒					
					checked	03.03.26							C ☐					
					standard													
					change checked													
													drawing number				sheet	
													263398				2/2	
																	A3	
rev.	description		date	sign.	repl. for:								replaced by:					

Please note

copy of drawing is scaled down

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Wicke GmbH + Co.
Elberfelder Straße 109
D-45549 Sprockhövel-Herzkamp

OEM		
speed	load capacity	
	drive, swivel and brake wheels	free running load wheels
6 km/h	kg	1550 kg
10 km/h	kg	1220 kg
16 km/h	kg	1060 kg

rev. description date sign.