
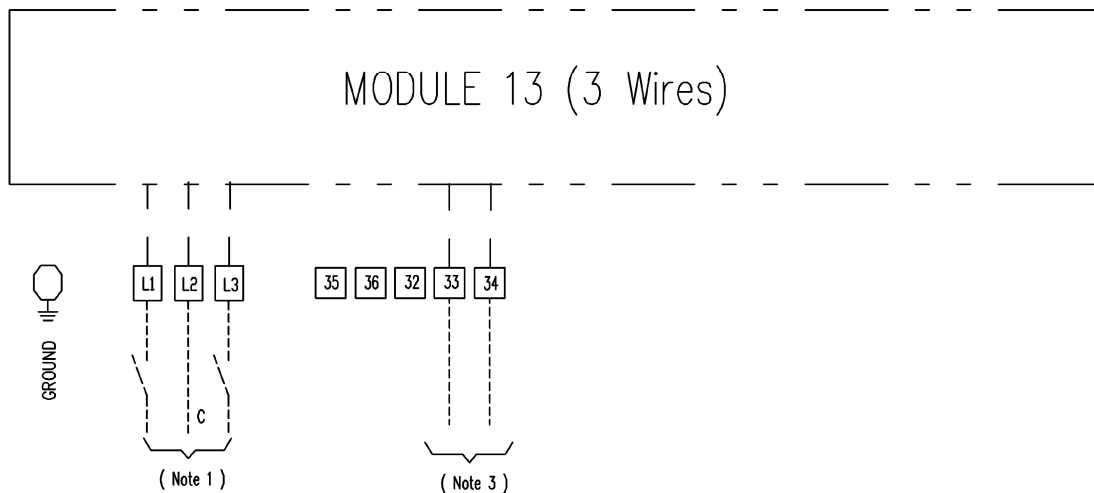


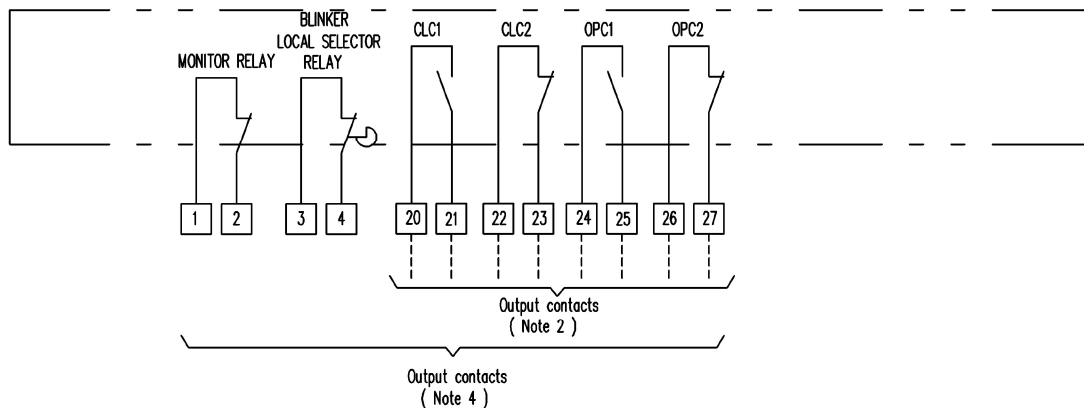

NOTES :

- 1) L1-L2 connection to OPEN
L2-L3 connection to CLOSE
Supply from 110 to 240Vac/1ph
L2 neutral
- 2) Contacts shown in intermediate position CLC1-CLC2 end of travel signalling in CLOSING
Contacts shown in intermediate position OPC1-OPC2 end of travel signalling in OPENING
- 3) Internal heater (max 10watt) is activated when a power supply from 110 to 240Vac is connected to the terminals 33-34
- 4) Output contact rating : 240Vac/5A-30Vdc/5A-120Vdc/0,5A
Output contacts (when used) have to be feed with the same external voltage

DISEGNO COSTRUTTIVO

Nessuna modifica è ammessa senza l'approvazione della "PERSONA AUTORIZZATA"

RELATED DRAWING

No modification permitted without the approval of the "AUTHORISED PERSON"

FILE: T:\SE_ICON\WD4NA002S

Rev.	Date	By	Checked	Approved	Description
					Drawing Number WD4NA002S
ACTUATOR SERIES SCE300 - WIRING DIAGRAM -					PREFIX X File Sheet 1/1 Date 20-02-14 By PATHE Checked ESPOSITO Approved VIGLIANO