


REIKU® PA RNB

BN 22622 - Tubings for cable protection standard version



Manufacturer

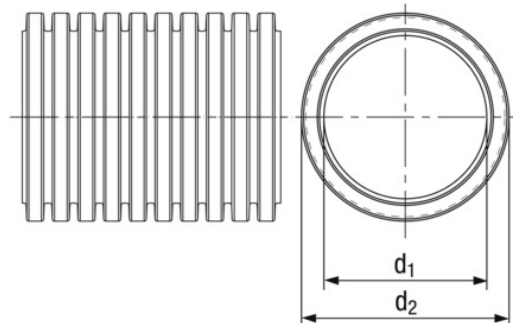

Product features

- Medium quality
- Reversed bending strength: good
- Compression strength: 125 N / 50 mm
- Impact strength: 6 Joule at -18 °C, >20 Joule at room temperature
- Temperature range: -40 °C ... +105 °C (+150 °C short-term)
- Resistance to: alcohol, grease, mineral oils, petrol, diesel oil
- Halogen-free

Additional information

In order to maintain the polyamide tubings properties of material, storage under following conditions is recommended: storage temperature: +20 °C +/- 5 °C, humidity: 55 to 75 %.

Brand

REIKU®

Brandtype

PARNB

Material

Polyamide

Material type

PA 6

Color

black

Product application features



nominal width: 07; 10: not UL recognized

Article no.	Code	Nomiale diameter	d1	d2	Roll length in m
3695750	PARNB-07G	7	6,4	10	100
3695747	PARNB-10F	10	9,5	13	100
3695746	PARNB-12F	12	11,8	15,8	50
3695739	PARNB-14F	14	14,4	18,7	50

Article no.	Code	Nominale diameter	d1	d2	Roll length in m
3695748	PARNB-17F	17	16,5	21,5	50
3695742	PARNB-17G	17	15,5	21,5	50
3695751	PARNB-23F	23	22,6	28,5	50
3695740	PARNB-23G	23	21,7	28,5	50
3695738	PARNB-29F	29	27,9	34,5	50
3695745	PARNB-29G	29	27,8	34,5	50
3695752	PARNB-36G	36	35,8	42,5	30
3695743	PARNB-48G	48	46,5	54,5	30
3791749	PARNB-52G / 10	52	52	62	10
3695741	PARNB-52G / 30	52	52	62	30
3791751	PARNB-70G / 10	70	70	82,5	10
3695749	PARNB-70G / 30	70	70	82,5	30
3791752	PARNB-95G / 10	90	89	106	10
3695744	PARNB-95G / 30	90	89	106	30