

VELOMITOR TRANSDUCER

TV-22 TV-32

TV-22 and TV-32 transducers seismically measure absolute vibration by a direct installation on the supports of the vibrating part and supplies an output signal directly proportional to the vibration. This signal can subsequently be processed by a measuring channel of a CEMB "T" series device.

TV-22 and TV-32 transducers exploits the piezoelectric effect, generates an electric signal proportional to the vibration speed.



TECHNICAL CHARACTERISTICS	TV-22	TV-32
GENERAL		
Type of measurement	■ seismic (absolute vibration) piezoelectric	■ seismic (absolute vibration) piezoelectric
Sensitivity	■ 4 mV/mm/sec.	■ 20 mV/mm/sec.
Dynamic range	■ ± 1270 mm/sec.	■ ± 254 mm/sec.
Frequency response	■ ± 3 dB 1,5 ÷ 12000 Hz	■ ± 3 dB 1,0 ÷ 10000 Hz
Vibration direction	■ any	■ any
ELECTRICAL		
Settling time	■ < 4 sec.	■ < 4 sec.
Power supply	■ 2÷10 mA - 18÷30 Vdc	■ 2÷10 mA - 18÷30 Vdc
Output polarization voltage	■ 10-14 Vdc	■ 10-14 Vdc
Output impedance	■ < 100 ohm	■ < 100 ohm
Outer casing insulation	■ > 10 ⁸ ohm	■ > 10 ⁸ ohm
AMBIENT		
Temperature range	■ -50°C ÷ +121°C	■ -50°C ÷ +121°C
Protection against shocks	■ 5000 g pk	■ 5000 g pk
Electromagnetic sensitivity	■ CE	■ CE
Protection against external agents	■ IP68	■ IP68
PHYSICAL		
Weight	■ 90 g	■ 90 g
Resonance frequency	■ 25 kHz	■ 25 kHz
Outer casing material	■ AISI 316-L stainless steel	■ AISI 316-L stainless steel
Thread	■ 1/4"-28UNF (standard)	■ 1/4"-28UNF (standard)
	■ M8 X 1,25	■ M8 X 1,25
	■ M6 X 1,0	■ M6 X 1,0
	■ M10 X 1,5	■ M10 X 1,5
Connection	■ MIL-C-5015	■ MIL-C-5015
Tightening torque	■ da 2,7 a 6,8 Nm	■ da 2,7 a 6,8 Nm

TV-22 TV-32

ORDER INFORMATION:

A
TV-22/ ☐


A: THREAD

0	1/4" – 28 UNF
1	M8 X 1,25
2	M6 X 1
3	M10 X 1,5

A
TV-32/ ☐



A: THREAD

0	1/4" – 28 UNF
1	M8 X 1,25
2	M6 X 1
3	M10 X 1,5

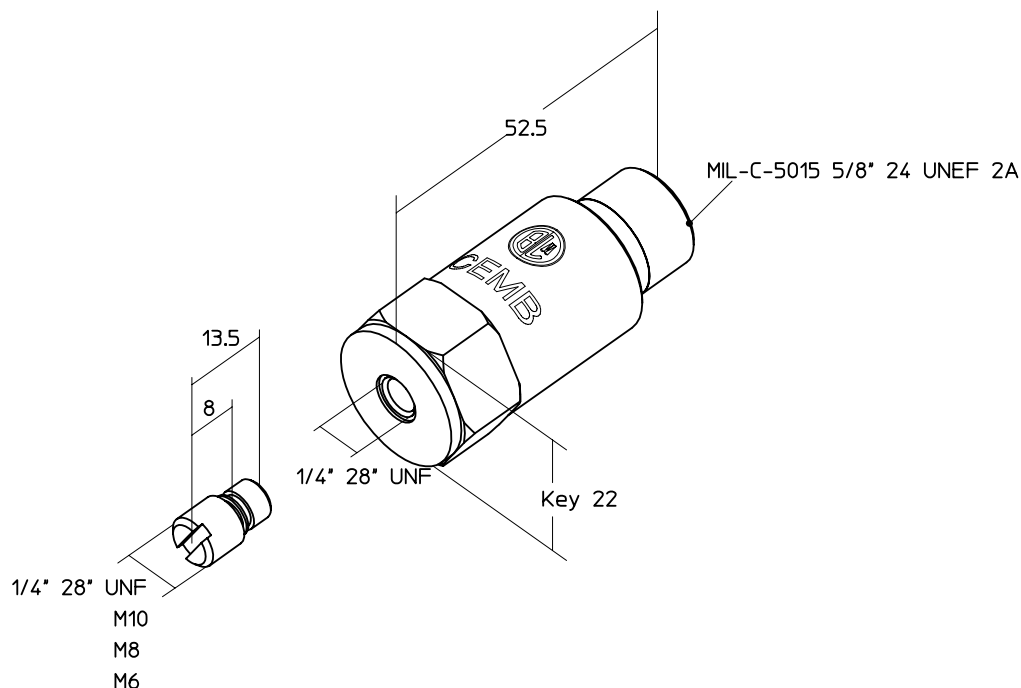

CABLES AND OPTIONAL ACCESSORIES

CABLES:

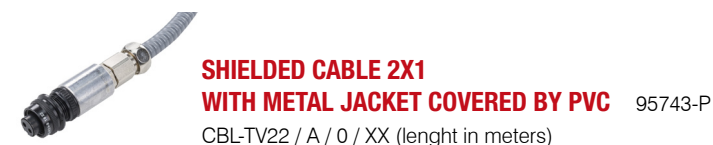

ONLY CONNECTORS:



TAGS:



CEMB
BALANCING MACHINES