


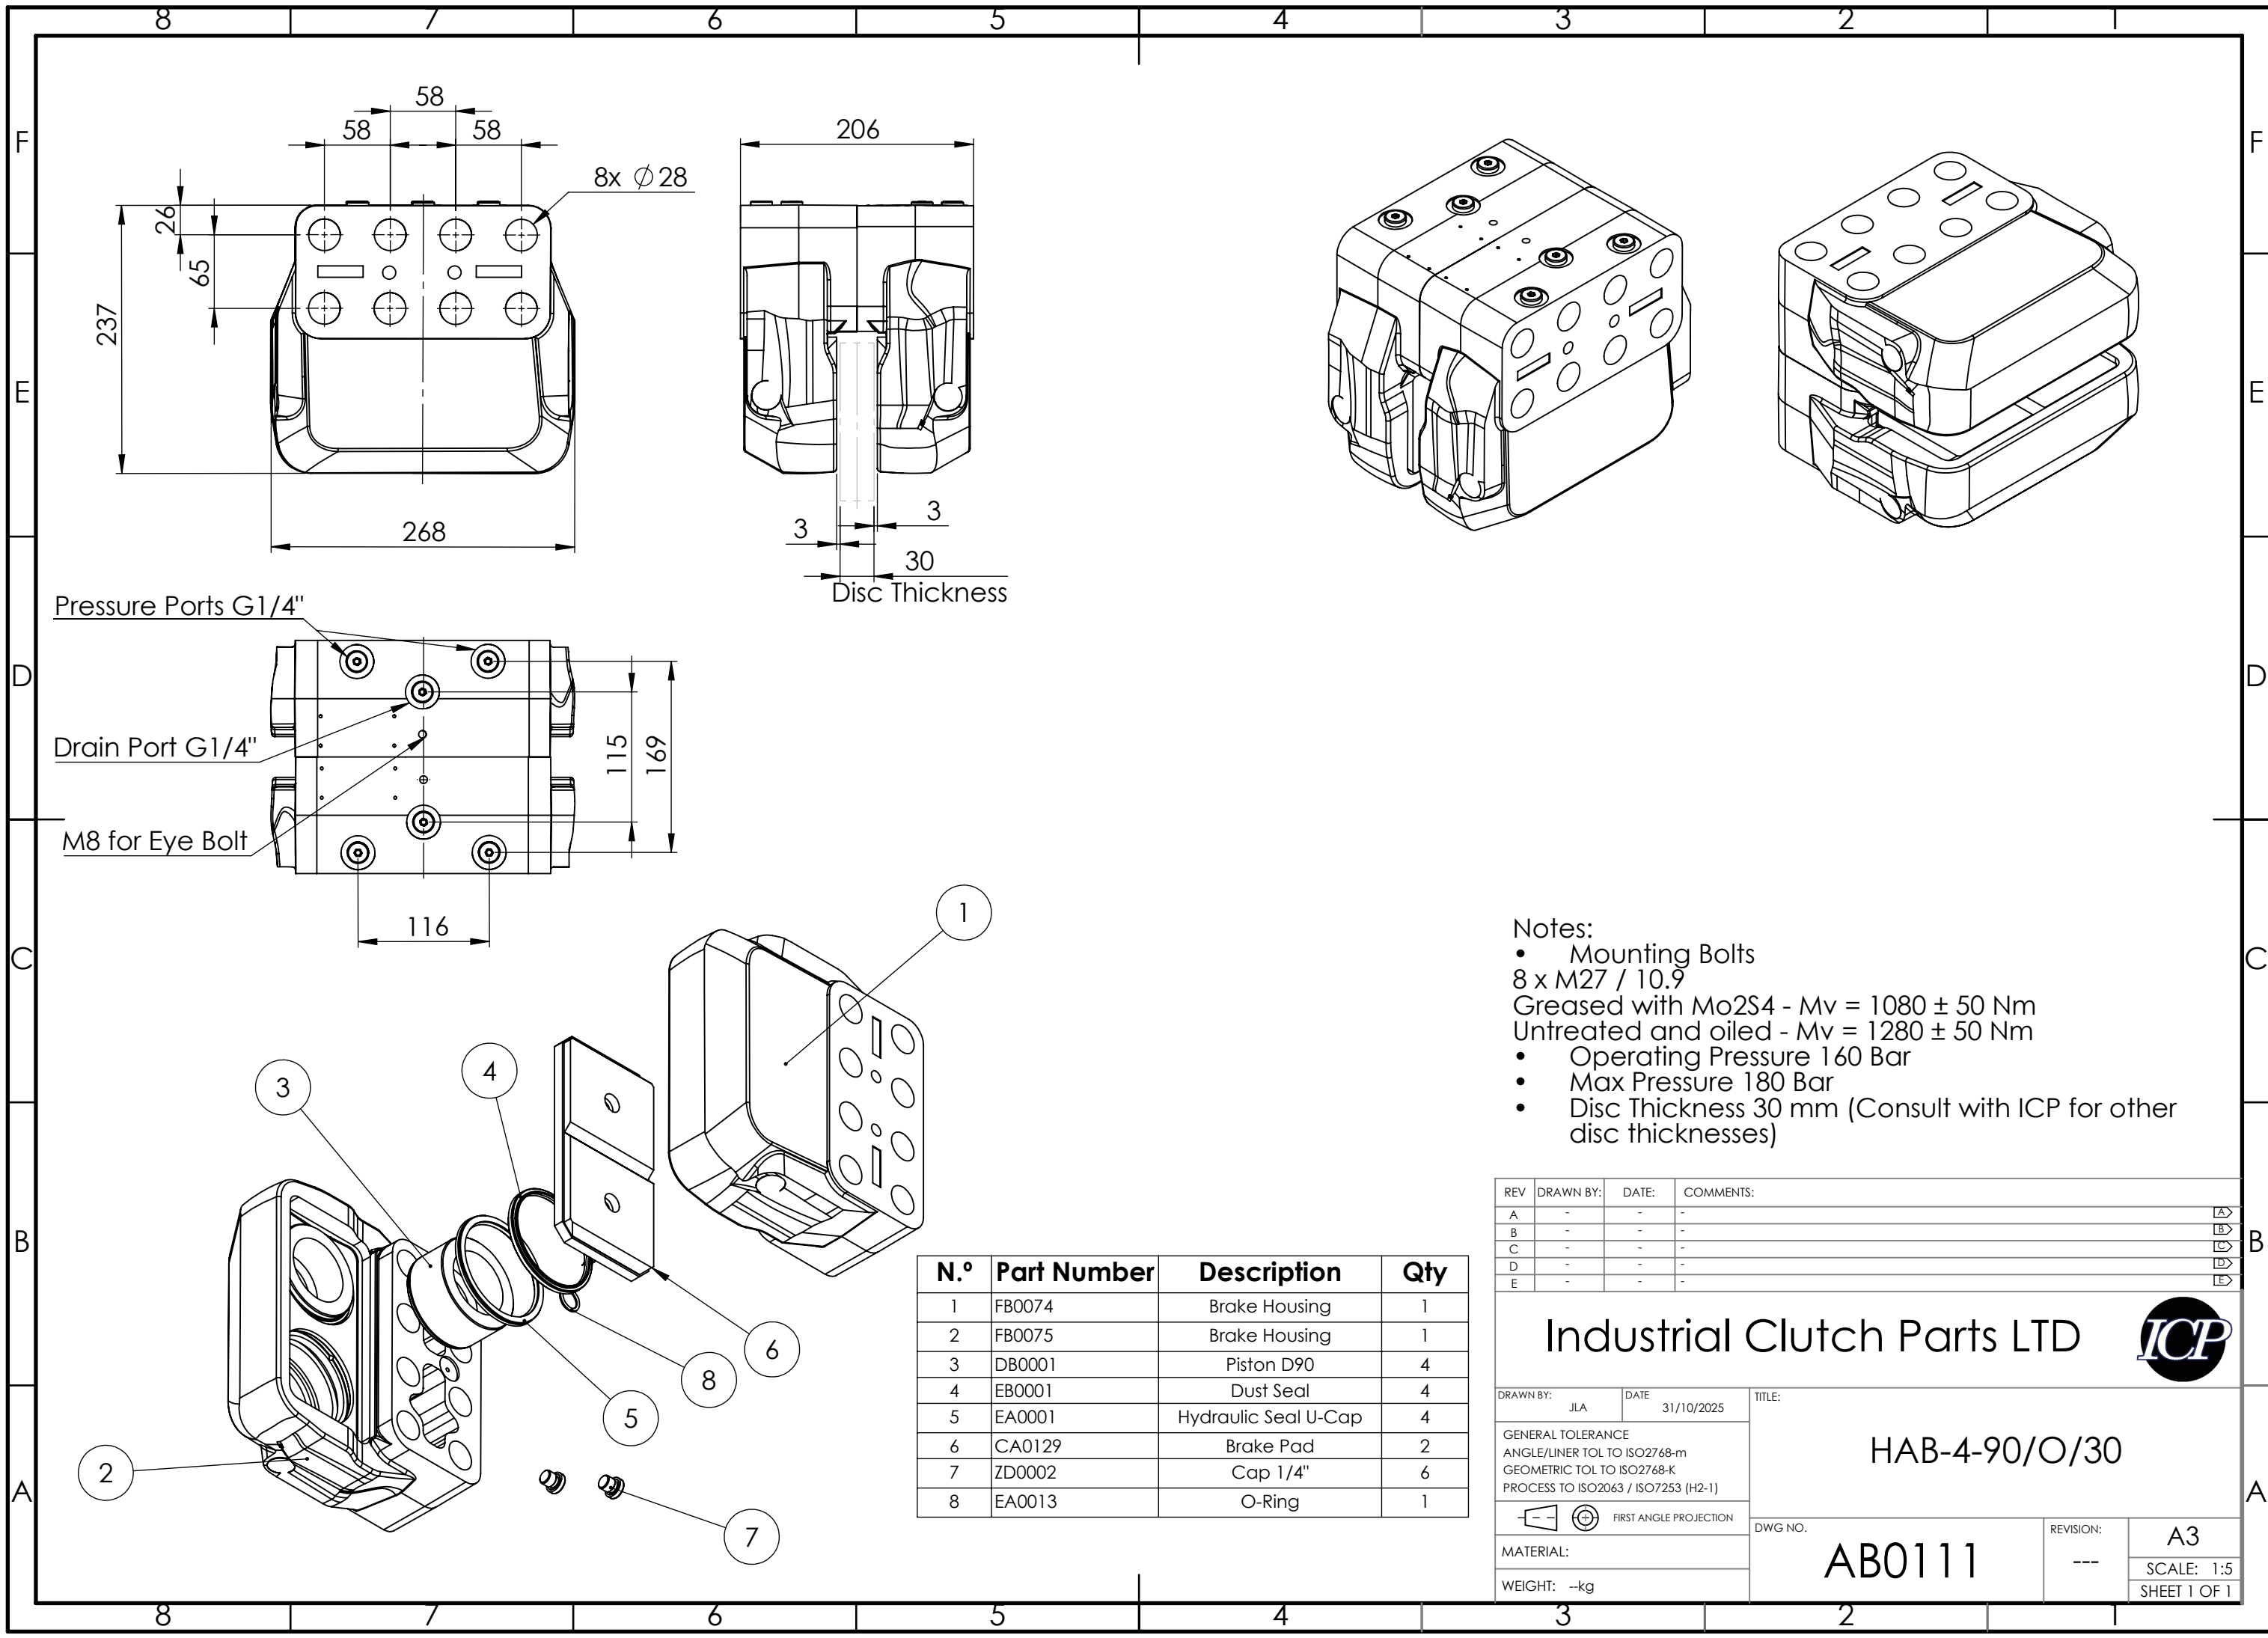

- Notes:
- Mounting Bolts
8 x M27 / 10.9
 - Greased with Mo2S4 - Mv = 1080 $\pm$ 50 Nm
 - Untreated and oiled - Mv = 1280 $\pm$ 50 Nm
 - Operating Pressure 160 Bar
 - Max Pressure 180 Bar
 - Disc Thickness 30 mm (Consult with ICP for other disc thicknesses)

REV	DRAWN BY:	DATE:	COMMENTS:	
A	-	-	-	A
B	-	-	-	B
C	-	-	-	C
D	-	-	-	D
E	-	-	-	E

Industrial Clutch Parts LTD

DRAWN BY: JLA	DATE: 31/10/2025	TITLE: HAB-4-90/O/30
GENERAL TOLERANCE ANGLE/LINER TOL TO ISO2768-m GEOMETRIC TOL TO ISO2768-K PROCESS TO ISO2063 / ISO7253 (H2-1)		
FIRST ANGLE PROJECTION		DWG NO. AB0111
MATERIAL:		REVISION: ---
WEIGHT: --kg		A3
		SCALE: 1:5
		SHEET 1 OF 1