




ISO 5456-2
first angle projection

All dimensions are in
millimetres [mm]
unless otherwise specified.

war vorher Ø36

clevis end FO supplied separately
(NOT mounted on BA)

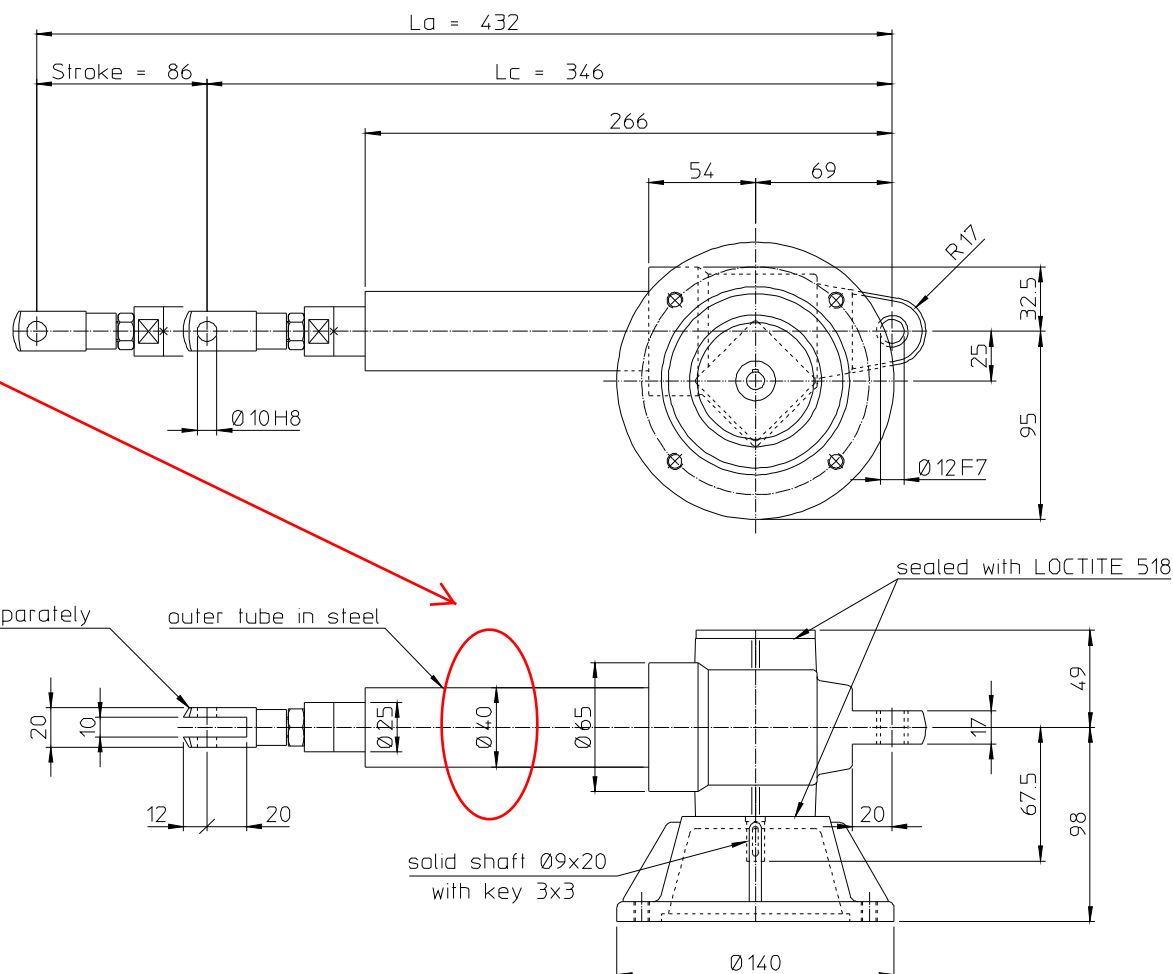

PERFORMANCES:

- Max. stroke: 86 mm
- Linear travel for 1 input shaft revolution: 0.8 mm

FEATURES

- Worm gear ratio: $6.25 : 1$
- Ball screw: dia. $14 \times$ lead 5
balls: 3.175 mm
number of circuits: 2
axial backlash between screw and nut ($0.02 \dots 0.04$) mm
- Safety clutch (code: FS)

Rev. 1	ext. diameter of outer tube 40 was 36	28 Mar. 2022	Dis.to: M. M. Visto: V P
		PRODUCT BALL SCREW LINEAR ACTUATOR BSA 20 RV1 C100 FO FS Vers.5(bell-housing IEC 63 B5, NO coupling) RH	
PRODUCT CODE 02.020/4552		Rev. 1	