



[Article Page](#)

Product Description

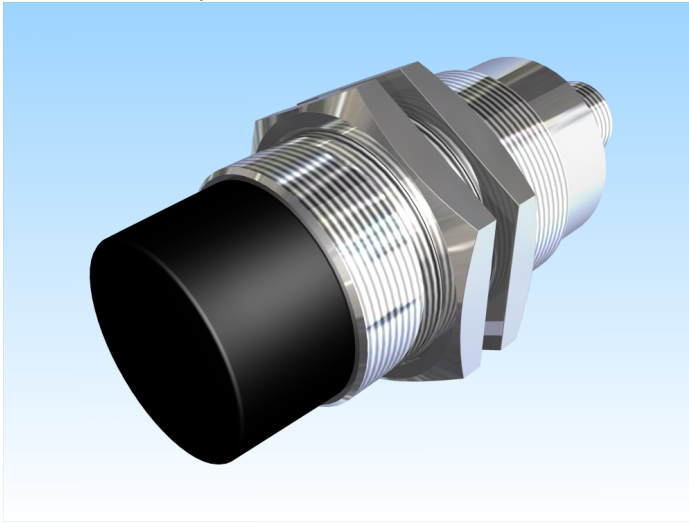

induktiver Sensor DC

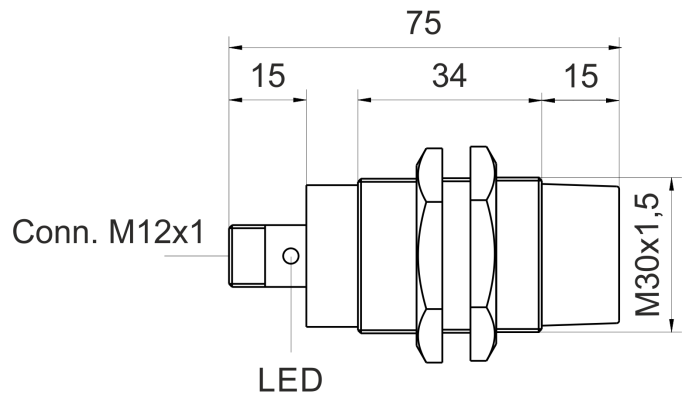

Name

KJ15-M30MN75-DPS-V2

Order number

08317664265

Matchcode

9966-4265

Switching distance

15 mm

Mounting

 nichtbündig

Switch type

 Schließer


DC PNP

Stecker M12

Signal Type

Connection

Connection diagramm

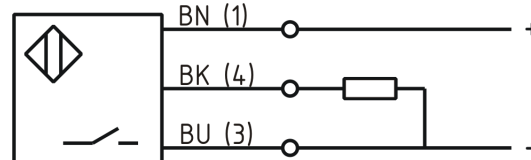

Dimension (in mm)

fine-pitch thread M 30x 75

Operating voltage

10 - 30 VDC

Max. ripple

$1 \leq 10 \%$

Voltage drop

1 2.4 V

Max. load current

200 mA

No load current

$\leq 13 \text{ mA}$

Leakage current

$\leq 10 \mu\text{A}$

Switching frequency

300 Hz

Switching hysteresis

$\leq 15 \%$

Operating temperature

-25 ° C to +70 ° C

Temperature drift

$\leq 10 \%$

Repeat accuracy

$\leq 10 \%$

Switching state

LED

Short-circuit proof

ja

Overload protection

ja

Reverse voltage protection

ja

Protection category

IP67

EMC-level

DIN EN 60947-5-2: 2008

Housing material

Messing vernickelt

Material active face

Ultramid B3ZG3 sw

Utilisation category

DC 13

Termination

Connector M12 4pin