
E1 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1” Bolted Plastic

with Plastic Center Section

PERFORMANCE

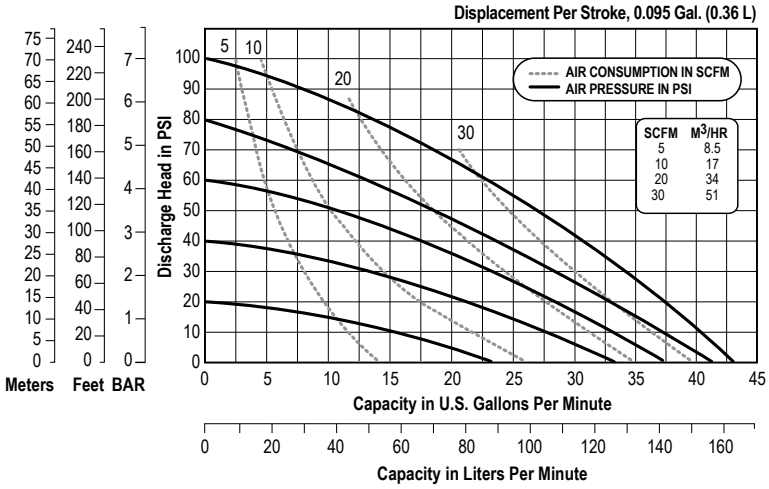

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate

Adjustable to 0-43 gpm (162.8 LPM)

Port Size

Suction1” 150# ANSI/DIN 325 Flange

Discharge1” 150# ANSI/DIN 325 Flange

Air Inlet . . . . . 3/8” NPT

Air Exhaust . . . . . 1/2” NPT

Suction Lift

Dry . . . . . 11’ (3.4 m)

Wet . . . . . 31’ (9.4 m)

Max Solid Size (Diameter)


. . . . . 1/8” (3.1 mm)


Max Noise Level . . . . . 94 dB(A)

Shipping Weights

Polypropylene . . . . . 17 lbs (7.7 kg)

PVDF . . . . . 22 lbs (10 kg)

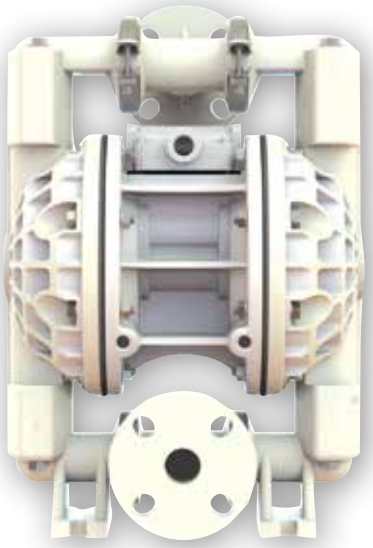

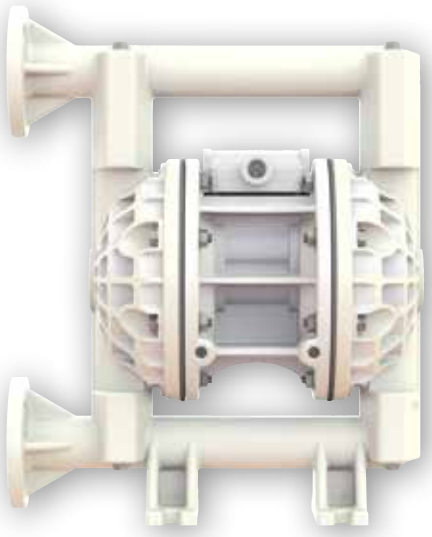

VERSAMATIC®

E1 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1” Bolted Plastic


with Plastic Center Section

DIMENSIONS

E1 Bolted Plastic

Dimensions in inches (mm dimensions in brackets)


The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.

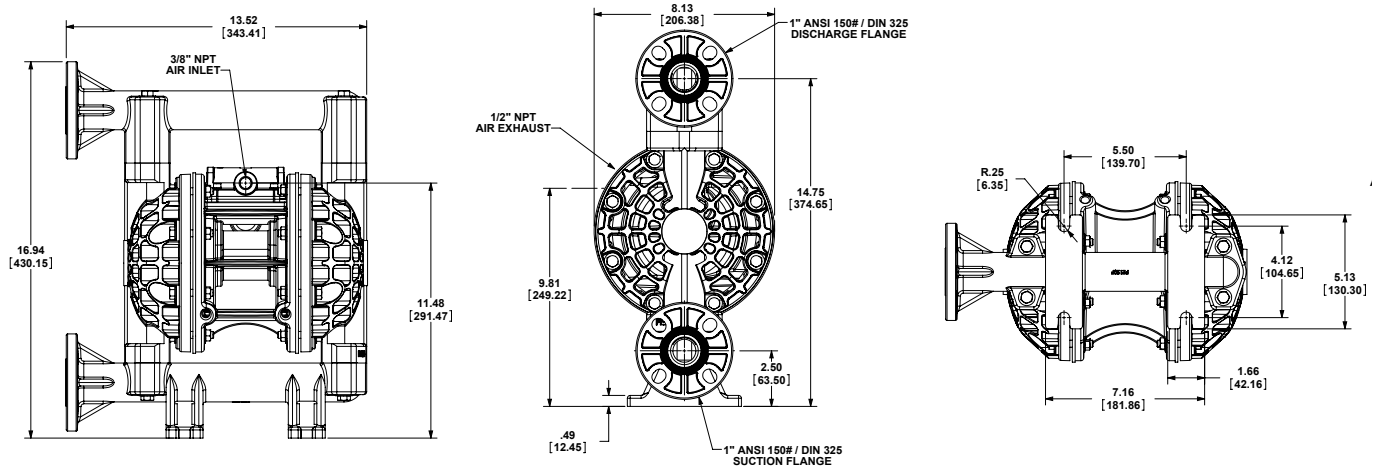

E1 Bolted Plastic (Center Ported Manifold Option)

Dimensions in inches (mm dimensions in brackets)

The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.

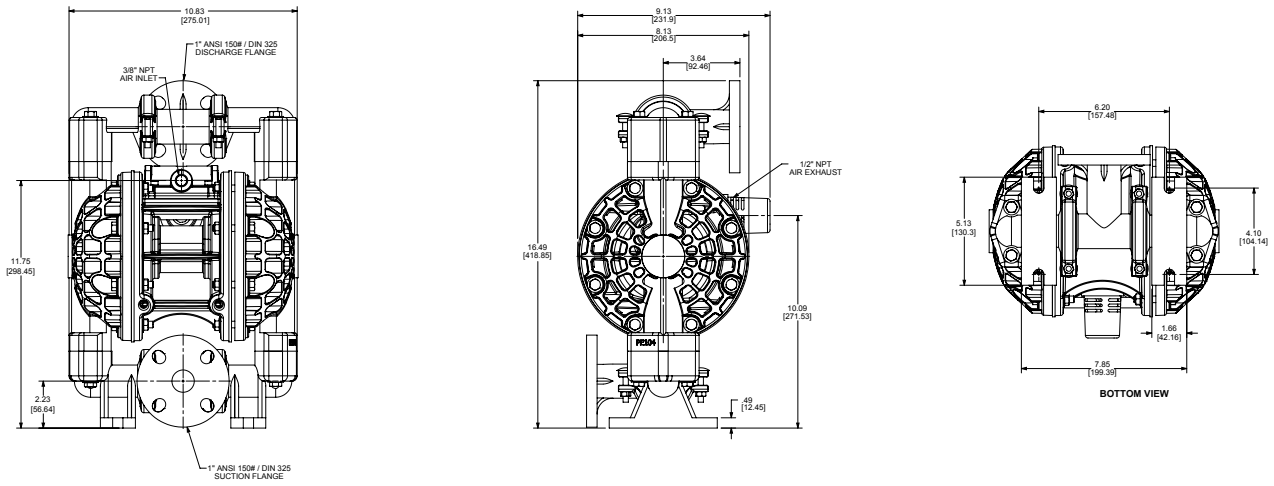

VERSAMATIC®