




POWER SUPPLY VOLTAGE DC24V
CONSUMPTION CURRENT 10mA
OUTPUT SPEC. DC60V 100mA(NON-INDUCTIVE LOAD)

OIL RESISTANT CABLE 10m
6 CORES $\phi 4.8$
PROTECT TUBE 4m

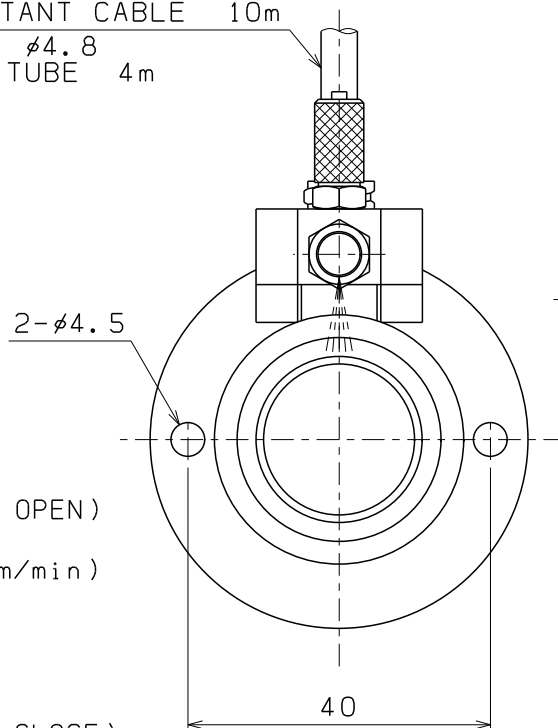

- ① SKIP SIGNAL
OUTPUT :NO(NORMALLY OPEN)
REPEATABILITY :0.001mm
(OPERATING SPEED :50~200mm/min)
- ② OVER TRAVEL SIGNAL
MICRO SWITCH
OPERATING MODE:NC(NORMALLY CLOSE)
CONTACT RATING:DC24V 100mA
(NON-INDUCTIVE LOAD)

DEGREE OF PROTECTION :IEC IP67

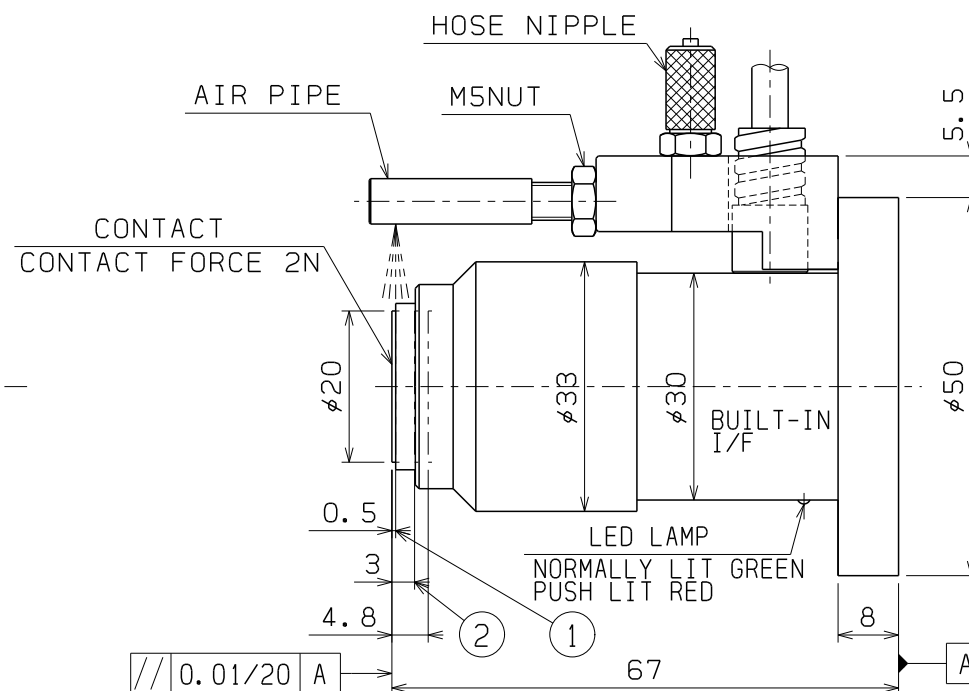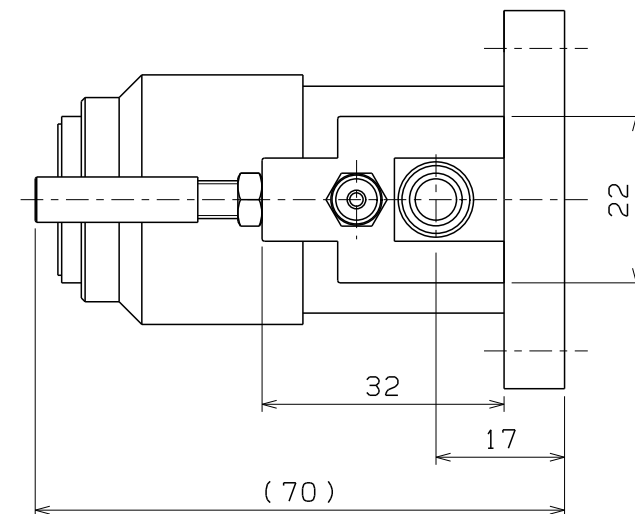

// 0.01/20 A

CHK	DRA	A4	NAME	TOOL SETTER
久保田	25.02.06 Arai	1:1	DRAWING NUMBER	MG-TM26D-ST1
			METROL	