

Karakteristika puhalo po IEC 60312

Blower Performance in Accordance with IEC 60312

Oznake / Marking


Napetost / Voltage: 230 [VAC]
Frekvenca / Frequency: 50/60 [Hz]

Nazivna moč / Nominal power: 1200 [W]

Napetost	Premer odprtine	Tok	Vhodna moč	Vrtilna frekvenca	Podtlak	Pretok	Zračna moč	Izkoristek
Voltage	Orifice	Current	Input Power	Speed	Vacuum	Air Flow	Air Power	Efficiency
[VAC]	[mm]	[A]	[W]	[1/min]	[kPa]	[dm ³ /s]	[W]	[%]
230	50	10,08	1247	32021	2,0	66,9	132	10,6
230	40	10,08	1246	32062	4,2	62,0	260	20,9
230	30	10,00	1235	32367	8,5	49,3	421	34,1
230	23	9,71	1192	33612	14,2	36,8	521	43,7
230	21	9,56	1169	34314	16,0	32,5	520	44,5
230	19	9,40	1146	35136	17,8	27,9	497	43,4
230	16	9,10	1101	36569	20,2	21,0	423	38,4
230	13	8,67	1039	38832	23,0	14,7	338	32,5
230	10	8,35	992	38832	24,1	9,0	216	21,8
230	6,5	7,96	935	42188	25,3	3,9	99	10,6
230	0	7,47	868	44364	26,4	0,0	0	0,0

Mejne vrednosti / Guaranteed values

Maksimalna moč / Maximal power:	P_{1max} [W]	≥	1200-1300	pri odprti zaslonki/ at wide open inlet
Vrtilna hitrost / RPM	n [min ⁻¹]	≥	31.000	pri odprti zaslonki/ at wide open inlet
Zračna moč / Air Power:	P_{2max} [W]	≥	500	pri max. izkoristku / at max. efficiency
Izkoristek / Efficiency:	η_{max} [%]	≥	44	
Masa / Mass:	m [kg]	≥	1,40	

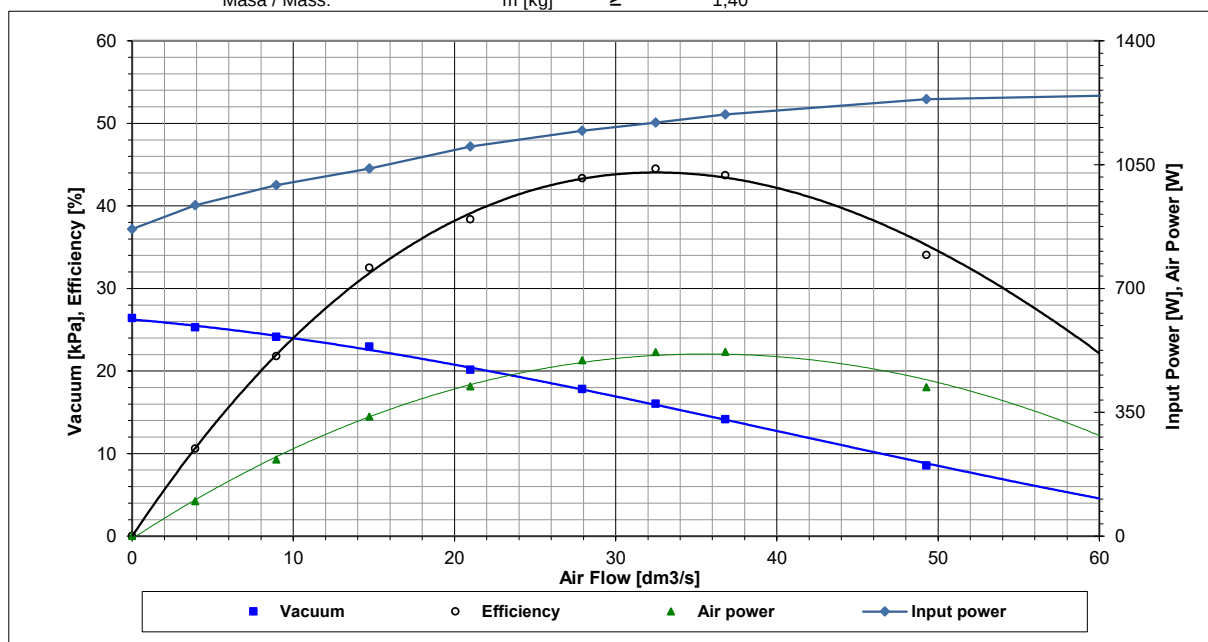

					datum	ime	naziv KARAKTERISTIKA PUHALA BLOWER PERFORMANCE					
			izdelal	08.05.2023	Čemažar G.							
			pregledal	08.05.2023	Kavčič M.							
							koda KA 792.3.230-201		list 5			
A0	16556	08.05.2023	G. Čemažar				Otoki 21, 4228 Železniki, Slovenija			pripadnost		namesto
ozn.	št. obvestila	datum	ime									