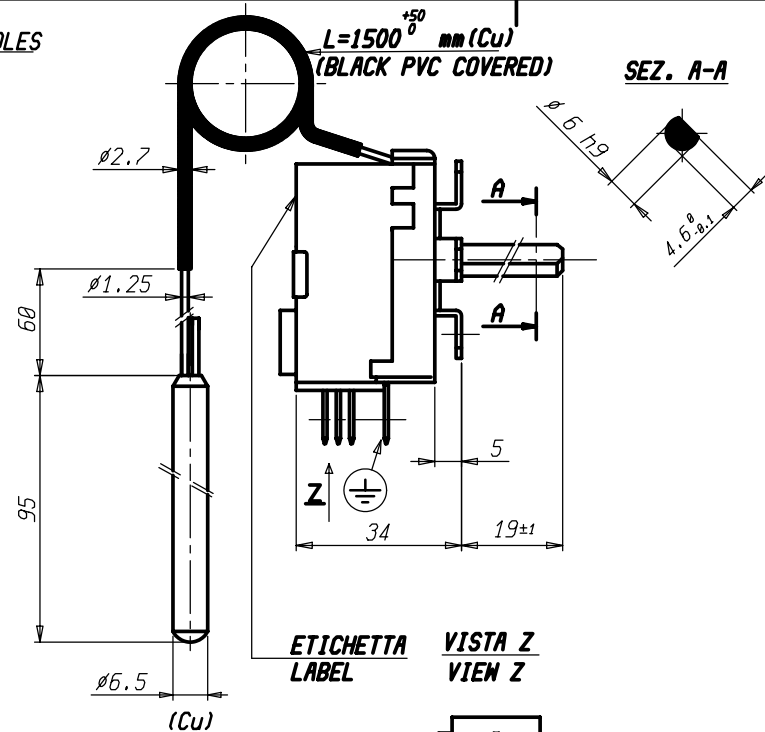
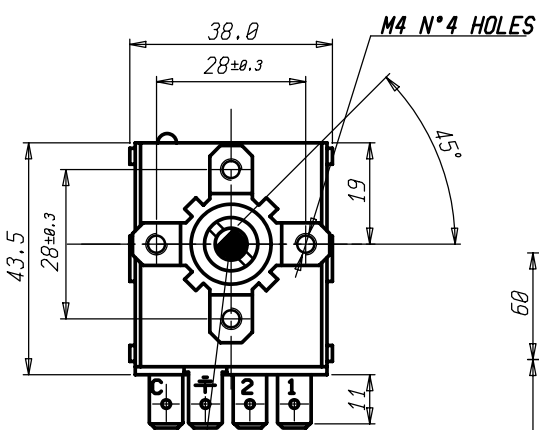


VALORI D'INTERVENTO CON TERMOSTATO A TEMPERATURA AMBIENTE DI 20 °C
SWITCHING POINT WITH THERMOSTAT AT AMBIENT TEMPERATURE = 20 °C

DATI TECNICI **TECHNICAL DATA**


ETICHETTA **LABEL**

OMOT
 0-90 °C TYPE TR2 9335 settimana/anno impianto
 C1 16(6)A/250V~ T85
 C2 6(4)A/250V~

CE 0497 CATEGORIA IV

REGOLAZIONE D' INTERVENTO	27,5 / 87,5 ±2.5 °C
TEMPERATURE RANGE	
DIFFERENZIALE	Δt 4±1 K
TEMPERATURE DIFFERENTIAL	
MAX. TEMPERATURA TESTA	T 80 °C
MAX. BODY TEMPERATURE	
MAX TEMPERATURA BULBO	130 °C
MAX BULB TEMPERATURE	
RAGGIO MIN. CURVATURA CAPILLARE	5 mm
MIN. CAPILLARY BENDING RADIUS	
PORTATA CONTATTI	NC 6FLA - 16A N.I. 250V~
CONTACTS RATING	NO 4FLA - 6A N.I. 250V~
OMOLOGAZIONI	CE 0497 DIN
APPROVED BY	

SCHEMA ELETTRICO **WIRING DIAGRAM**



Pos.	Codice	Denominazione	N. Pezzi	Note
		Materiale		
		Trattamento		
		Peso grezzo	Quote senza indicazione di tolleranza: precisione gruppo B	Lunghezza lato minore
			da 0 da 6 da 30 da 120 da 315 da 1000 da 2000	da 0 da 10 da 50 da 100
		Peso finito	A ±0.05 ±0.1 ±0.15 ±0.2 ±0.3 ±0.5 ±1.2 ±2	±1' ±30' ±20' ±10'
		Progetto N°	B ±0.1 ±0.2 ±0.3 ±0.5 ±0.8 ±1.2 ±2 ±3 ±4	
		C ±0.2 ±0.5 ±0.8 ±1.2 ±2 ±3 ±4		
		Diseg. BARATTI 21/10/96	Verif. CAPITANIO 21/10/96	
		Scala	Sost. II 540355/2	
		1:1	08/08/04	
		Denominaz.		
		TERMOSTATO REGOLABILE TR2 /ADJUSTABLE THERMOSTAT TR2		
		A3		