


Trimod'Besta

Trimod Besta Pneum. Füllstandregler

Trimod Besta Pneum. Level Controller

Trimod Besta Régulateur de niveau pneum.

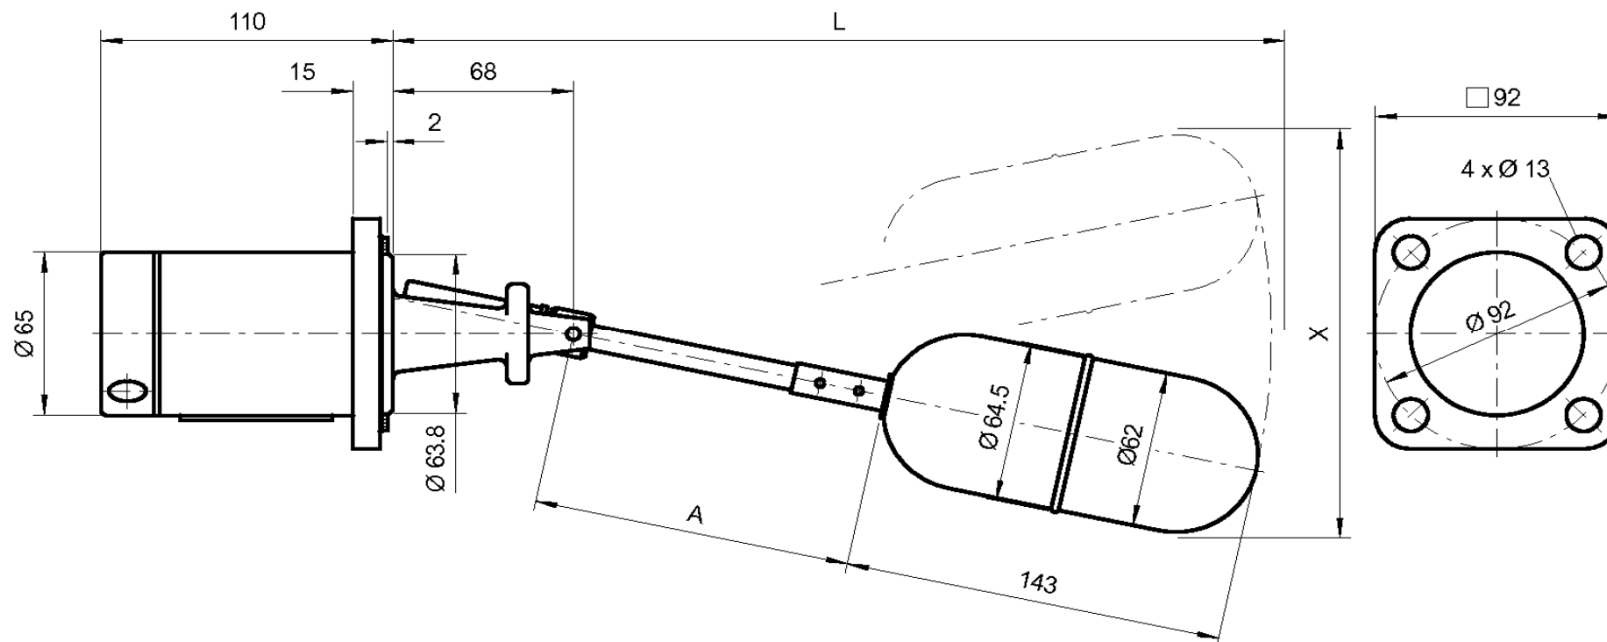

Gasket Ø77/64x2 Blue Gard 3000

Type		Schaltmodul		Flanschmodul		Schwimmermodul		Order no.	
Type	M 01 04G1	Switch module	M	Flange module	01	Float module	04G1	Stk./ pcs./quant.	
Type	(Art. no.)	Module de commande		Module de bride		Module de flotteur		Date/Visa	01.10.15 / TSI
Betriebstemperatur		Gehäusematerial		Nenndruck / -weite		Regelbereich		BACHOFEN Industrial Automation Bachofen AG, Ackerstrasse 42 CH-8610 Uster/Switzerland Phone +41 44 944 11 11 Fax +41 44 944 12 33 info@trimodbesta.com www.trimodbesta.com 011015/TSI	
Operating temp.	1 to 250°C	Housing material	Aluminium	Nom. Pressure / -Diameter	PN 25	Control range	--		
Temp. de service		Matériau boîtier	Sea water resistant	Pression- / Section Nominal		Plage de réglage			
Umgebungstemp.		Steueranschluss		Norm		Dichte min.			
Ambient temp.	1 to 80°C	Control connection	G 1/8" BSPP	Standard	Besta	Density min.	--		
Temp. d'ambiance		Raccord de comm.		Norme		Densité min.			
Speisedruck		Ausgangssignal		Dichtungsart		Prüfdruck			
Control pressure	1.4 bar	Output signal	0.2 to 1 bar	Flange Facing	Raised face	Test pressure	40 bar		
Pression d'aliment.		Signal de sortie		Type d'étanchéité		Pression d'épreuve			

011015/TSI